

# G1238 series

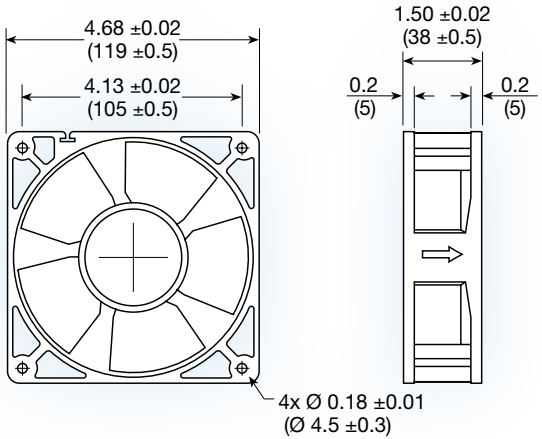

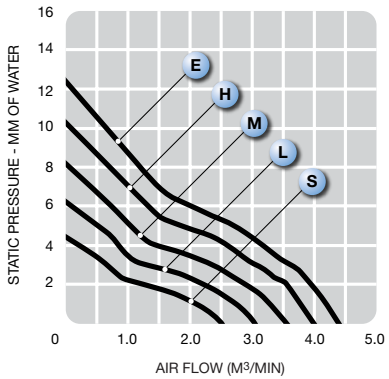


## (120 x 120 x 38 mm)

4.69 x 4.69 x 1.5 inches

| | |
|---|---|
| Construction: | UL94V-0 PBT impeller & frame |
| Bearing option: | ball bearing |
| Connection: | AWG 24, UL1007 lead wires |
| Frame: | flanged |
| Protection: | thermal |
| Options: | tachometer output or locked rotor alarm signal; encapsulated motor; PWM speed control |

| Model No. | Rated Voltage | Current mA | | | Speed | Air Volume | | Max. Static Pressure ($H_2O$) | | Sound Noise | Weight |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | V | 12 | 24 | 48 | RPM | $M^3$/Min. | CFM | MM | INCH | dbA | g |
| G1238S | 12/24/48 | 250 | 180 | 80 | 2,000 | 2.50 | 88 | 4.39 | 0.17 | 34 | 336 |
| G1238L | 12/24/48 | 400 | 250 | 130 | 2,400 | 3.03 | 107 | 6.22 | 0.24 | 38 | 336 |
| G1238M | 12/24/48 | 600 | 330 | 180 | 2,800 | 3.54 | 125 | 8.16 | 0.32 | 43 | 336 |
| G1238H | 12/24/48 | 750 | 450 | 250 | 3,200 | 3.99 | 141 | 10.31 | 0.41 | 46 | 336 |
| G1238E | 12/24/48 | 1200 | 600 | 330 | 3,600 | 4.46 | 158 | 12.45 | 0.49 | 49 | 336 |

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## MECHATRONICS:

G1238M48B2-FSR UF80A23-BTHR F6025L12B-FHR F8025X24B-FHR G1238L24B-FSR
UF25GC12-BTHR-B1 G9225X12B1-FSR MA8025E12D-FSR UF250APA12-H1C2A F8025H05B1-FSR
M5210E12C-RSR MSI1967H24B1+7-BBR MXB9733H24B-BSR SGR-36 UF25GCB12-BTHR
UF80B12-BWHR G1338S12B-FSR G4010E12B1-RSR-WS G5015E12B-RSR F1238X24B1-FHR-TTL
MR8032H24B-FSR MS2507M12D-RSR E1225E12B2-FSR G8015L05B-RGR UF15KC12/23-BWHR
UF200BMB12-H2C2A B1232H24B-BSR E9225E24B-FSR G1238E12B1+6-FSR-WS UF15KC23-BWHNR