


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/30/00	–	INITIAL RELEASE
A	11/22/08	–	UPDATE DRAWING FORMAT

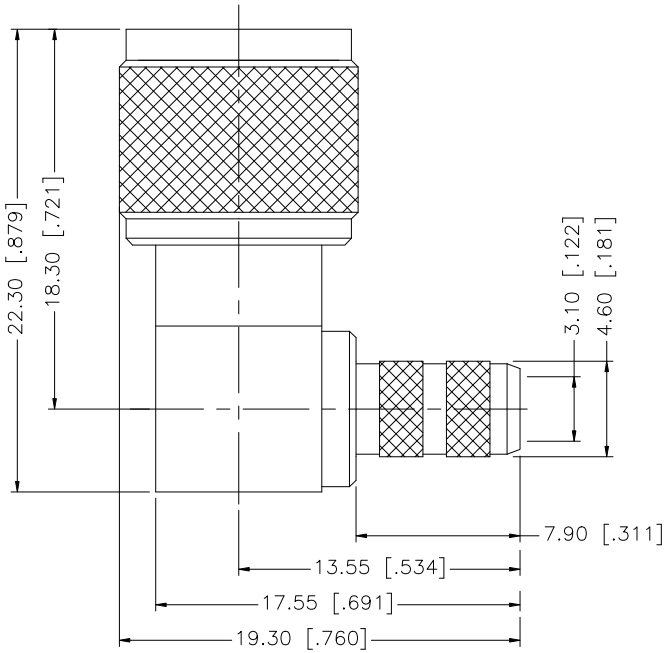

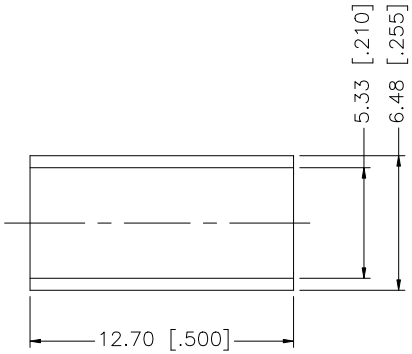

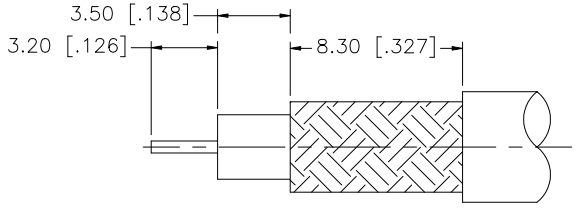

RECOMMENDED CABLE STRIPPING DIM'S

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE.213" [5.41]

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5	FERRULE	COPPER	NICKEL	1
4	COVER	BRASS	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	11/22/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/182/182323.DWG

Amphenol Connex

PART DESCRIPTION
MINI–UHF R/A CRIMP PLUG
(FOR RG–58/U, 58C/U CABLE)

PART NO. 182323

DWG. NO.	REV.	SIZE	SCALE
182323.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-S08-07LF 65781-158 68001-108HLF 68002116HLF 70218-1116LF 91614-403ALF RJE061661210 86093488314745V1LF 86093967896755LF 86093968191755E3LF 863013A RJSBE5080C2 70430-164LF 95157-140LF 54202-G0805CLF 76384-316LF 86130202123355E1LF 70234-112LF 67996-204HLF 68000-236HLF 69192-408HLF 86093968813H45V1LF DEM09P032N LD15P33E4GV00LF 68001-200HLF CD15S13E4RV09LF D15P13A6RV12LF LD25S33E4GV00LF DAPO15S365TLF DCMF37P