


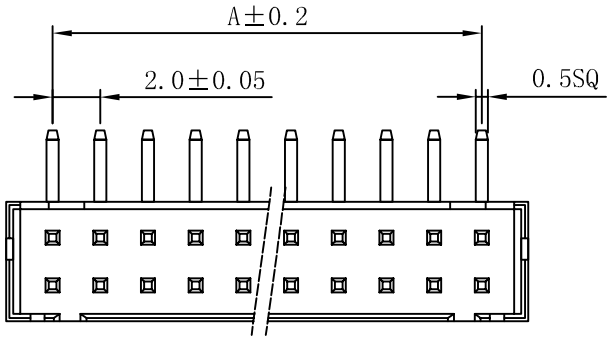


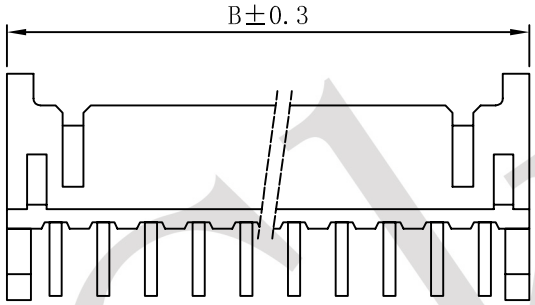

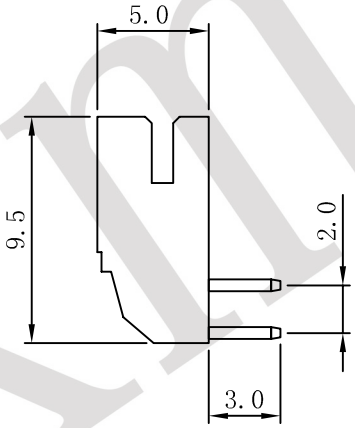

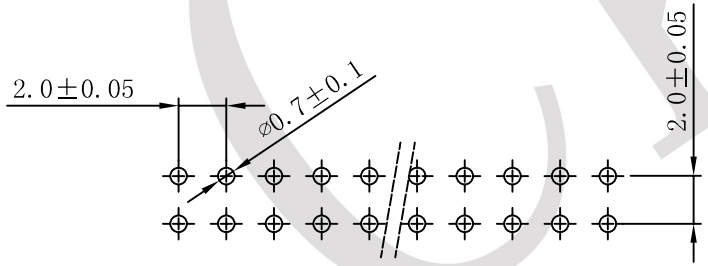

P.C.B LAYOUT

SPECIFICATIONS
Current rating: 2A AC/DC
Voltage rating: 250V AC/DC
Contact resistance:20mΩ max.
Withstand voltage:800V AC/min
Insulation resistance:1000MΩ/min.
Temperature range:-25° C~+85° C
Applicable PC board thickness:0.031"~0.063"(0.8~1.6)

Material:
Part No:4~40
Insulator:Nylon 66 UL94V-0
Contact:Brass
Finish:Tin Plated

Poles	Part No.	Dimension mm	
		A	B
4	2008R-2*2P	2.00	6.00
6	2008R-2*3P	4.00	8.00
8	2008R-2*4P	6.00	10.00
10	2008R-2*5P	8.00	12.00
12	2008R-2*6P	10.00	14.00
14	2008R-2*7P	12.00	16.00
16	2008R-2*8P	14.00	18.00
18	2008R-2*9P	16.00	20.00
20	2008R-2*10P	18.00	22.00
22	2008R-2*11P	20.00	24.00
24	2008R-2*12P	22.00	26.00
26	2008R-2*13P	24.00	28.00
28	2008R-2*14P	26.00	30.00
30	2008R-2*15P	28.00	32.00
32	2008R-2*16P	30.00	34.00
34	2008R-2*17P	32.00	36.00
36	2008R-2*18P	34.00	38.00
38	2008R-2*19P	36.00	40.00
40	2008R-2*20P	38.00	42.00

TOLERANCE TABLE	
.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO.,LTD
CHECKED:	DATE:	TITLE: 2008R-2*XP
DRAWN: LYF	DATE: 2008-07-05	CLIENT P/N /
		UNIT mm SCALE free
		FILE NO. Ckmtw-2008-0004 REV. A /

Ckmtw

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Ckmtw:

B-2100S02P-A110 B-2201S50P-A120 F-FPC0M30P-A310 9-EDK0009P-0000 B-2100S06P-B110 B-2100S10P-A110 B-2200S14P-A120 B-3100S30P-A110 S082540002 S152920020 B-2100N06P-B111 B-2100S16P-B110 B-2102S50P-B120 R-RJ45S08P-B000 B-2200S07P-A120 DDMRH15PFE006 W-2510S04P-0000 B-2100S03P-A110 B-2100S32P-B110 B-3002S14P-0110 R-RJ45S08P-B200 S082520012 B-3100S24P-A110 S191020002 B-3002S40P-0110 F-FPC1M18P-A310 B-2100R28P-B110 B-2202N10P-B121 B-2202R40P-A120 D-DMR009PM-D002