

Engineer Drawing


REV	ECN NO.	DESCRIPTION	DATE	APP'D
A/0		RELEASE TO PRODUCTION	01/29/18'	Scrth




B–B





2~7pin

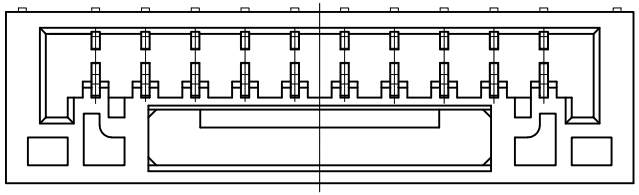


8~11pin






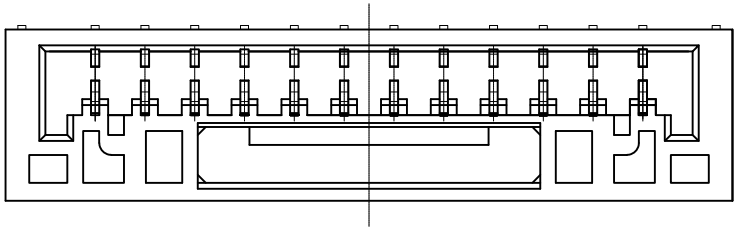


12~16pin



A–A



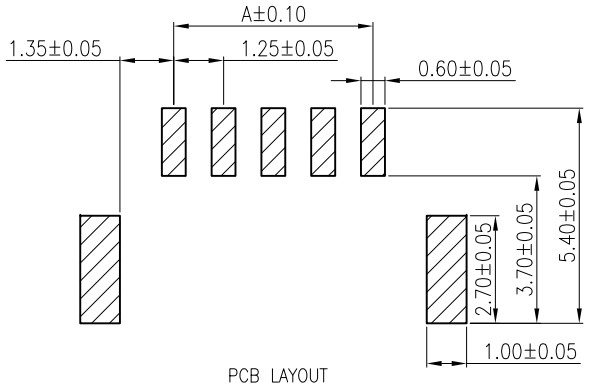

PCB LAYOUT

Poles	A	B	C
2	1.25	5.75	3.75
3	2.50	7.00	5.00
4	3.75	8.25	6.25
5	5.00	9.50	7.50
6	6.25	10.75	8.75
7	7.50	12.00	10.00
8	8.75	13.25	11.25
9	10.00	14.50	12.50
10	11.25	15.75	13.75
11	12.50	17.00	15.00
12	13.75	18.25	16.25
13	15.00	19.50	17.50
14	16.25	20.75	18.75
15	17.50	22.00	20.00

NOTES:

1. Material:
   Insulation:LCP/PA9T,UL94V–0(Nature)
   Pin:Phosphor bronze/Tin–Plated
   Tab:Phosphor bronze/Tin–Plated
2. Current Rating: 1A AC,DC
3. Voltage Rating: 100V AC,DC
4. Temperature Rang: –25°C~+85°C
5. Contact Resistance: 30mΩ Max
6. Insulation Resistance: 100MΩ Min
7. Withstanding Voltage: 500V AC/minute
8. Ordering Code: A1252RS–x

TOLERANCE		APPROVALS	DATE	深圳市金航标电子有限公司	www.kinghelm.com.cn
X.	±0.30	DRAWN Zhang Xiao Tao	01/29/18'	KH-A1252RS-4P	0755-28190160
X.X	±0.25	CHK'D Art Shi	01/29/18'	PART NO. A1252RS–x	TITLE: WIRE TO BOARD, PLUG, PITCH 1.25mm, CRIMP TYPE, ASSEMBLY
X.XX	±0.20	APP'D Art Shi	01/29/18'	DRAWING NO. EN–A1252RS–x	
Angle	±3°	UNITS mm	SCALE 1:1	SIZE: A4	SHEET 1 OF 1 001

UNLESS OTHERWISE SPECIFIED

REV.A/0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Kinghelm:

KH-6X6X6H-SMT-FS KHA(RG1.13)-TX50-IPEX KH-1.27PH90-1X20P-L10.5 KH-1.27PH90-2X10P-L10.5 KH-2.54PH90-1X15P-L13.8 KH-2.54TXM-CB-H13.5-G KH-4.5X4.5X6H-TJ KH-6X6X9H-STM KH-081-TX100-IPEX4 KH-1.27PH90-1X16P-L10.5 KH-4.5X4.5X10H-B3J KH-6X6X10H-STM KH-2.54TXM-CB-H13.5 KH-300922-TP KH-4.5X4.5X6.5H-SMT KH-BM2.54-2P-W KH-IPEX-K501-29 KH-2.54PH180-1X8P-L11.5 KH-2PH180-1X14P-L8.7 KH-DR9S-F8.1-1 KH-MCX-K507-W KH-PH-2P-Z KH-FFC-V0.5-8P-150MM KH-SMA-K513-11G KH-PCIE5.2H-52P KH-6X6X6H-TJ KH-FFC-V0.5-32P-150MM KH-HDMI-0024-JBS KH-HDMI-0035-PK KH-2.54FH-1X15P-H8.5