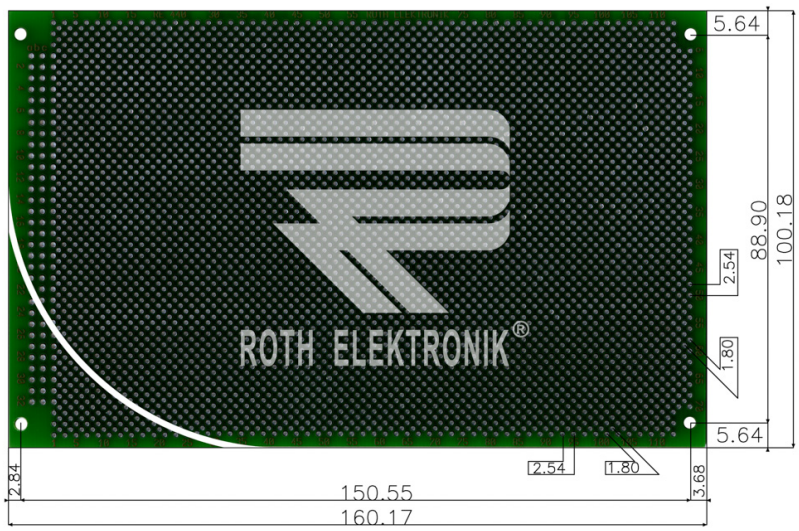


RE440-LF

- Epoxy fibre-glass FR4 1.50 mm
- Double-sided 35 µm Cu
- Plated through holes (PTH)
- Hot air leveling (HAL-leadfree)
- Surface with component print and soldering stop mask
- Staggered hole grid 2.54 x 2.54 mm, thus duplication of the borings (interstitial)
- Soldering pads 1.40 mm Ø
- 4304 holes 0.80 mm Ø
- Particulary appropriate for PGA sockets in staggered grid 2.54 x 2.54 mm
- Connector 32/64/96-channel DIN 41612 type C
- Working temperature max. 150 °C
- Solder bath proof: 260 °C > 50 Sec.
- Size 100 x 160 mm

Roth Elektronik GmbH
Industriestr. 4
65594 Runkel-Steeden

Phone: +49 (0)261 134978 - 08

E-Mail: info@roth-elektronik.com

Managing Director Mike Teschke
Register Limbrug HRB 7172
VAT ID no. DE1481222609

Hamburger Volksbank
IBAN DE30 2019 0003 0032 3184 05
BIC GENODEF1HH2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Roth Elektronik:

RE840-LF RE1030 RE120-HP RE1350-LF RE200-LFDS RE460-01 RE522-HP RE524-HP RE438-LF RE460-04 RE510-S3