Blanking plugs
VP M25 K54

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



For sealing surplus threaded holes to maintain the IP class of protection

General ordering data

Type	VP M25 K54
Order No.	1776900000
Version	Blanking plugs, Blanking plug, M 25, 10 mm, IP65, Polyamid 6 (PA6 - GF30)
GTIN (EAN)	4032248156344
Qty.	100 pc(s).

Data sheet

Blanking plugs
VP M25 K54

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Length	7 mm	Length (inches)	0.276 inch
Net weight	4.2 g		

General information

Cable gland	metric	External thread	M 25
Head diameter	30 mm	Length of thread	10 mm
Material	Polyamid 6 (PA6 - GF30)	Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C	Pitch of thread	1.5 mm
Protection degree	IP54	Protection degree with GWDR	IP65
UL 94 flammability rating	V-2		

Classifications

ETIM 3.0	EC000032	ETIM 4.0	EC000032
ETIM 5.0	EC000032	ETIM 6.0	EC000451
UNSPSC	30-21-18-01	eClass 5.1	27-14-91-10
eClass 6.2	27-14-91-10	eClass 7.1	27-14-91-10
eClass 8.1	27-14-91-10	eClass 9.0	27-14-44-33
eClass 9.1	27-14-44-33		

Product information

Descriptive text ordering data	Other versions available on request. The blanking plugs must be tightened "hand-tight" with the screwdriver.
Descriptive text technical data	Optional sealing ring

Approvals

Approvals	EAC
ROHS	Conform


Downloads

Brochure/Catalogue	CAT 3 HDC 17/18 EN CAT 5 ENCL 17/18 EN
Engineering Data	EPLAN, WSCAD

Blanking plugs
VP M25 K54

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

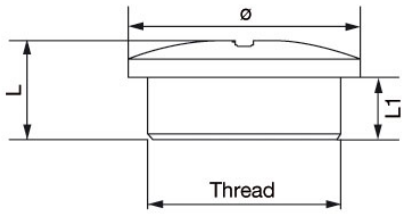

Blanking plugs
VP M25 K54

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Plastic nuts, standard



Weidmüller has a variety of different cable and wire entry systems in the Portfolio: with different designs of plastic, brass and stainless steel cable glands in the IP66, 67, 68 or IP69k protection classes. As a complete alternative to cable glands, pre-assembled cables with modular multi-wire or multi-cable entry systems can be simply and quickly inserted into electrical equipment. Last but not least, Weidmüller offers EX-certified cable glands and cable/wire entry systems.

- Cable glands made from plastic and brass
- EMC screwed joints
- for areas at risk of explosion
- VDE, CSA and UL approvals

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
SKMU M32 - K GR	1772480000	Accessories, Locknut, M 32, 7 mm, Polyamid 6 (PA6 - GF30)	4032248130221	100 pc(s).

GWDR - neoprene flat gasket



The range of cable glands is rounded off by a large number of accessories.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
GWDR M32-NP	1736260000	Accessories, Sealing ring, M 32, Neoprene	4008190956059	50 pc(s).

Blanking plugs
VP M25 K54

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

GWDR - Polyethylene flat gasket



The range of cable glands is rounded off by a large number of accessories.

General ordering data

Type	Order No.	Version	GTIN (EAN)	Qty.
GWDR M32-PO	1777960000	Accessories, Sealing ring, M 32, Polyethylene	4032248158225	50 pc(s).