




| MAPX | MODIFICATION | DATE |
|---|---|---|
| | | |

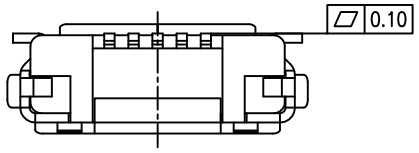






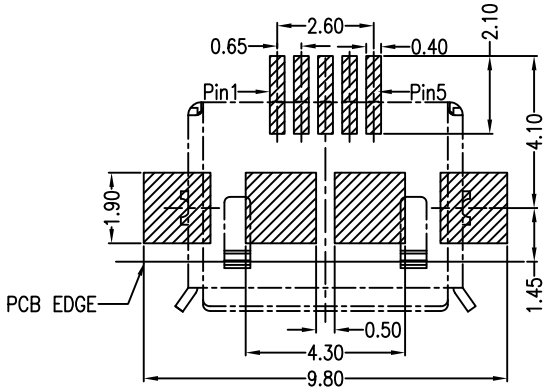




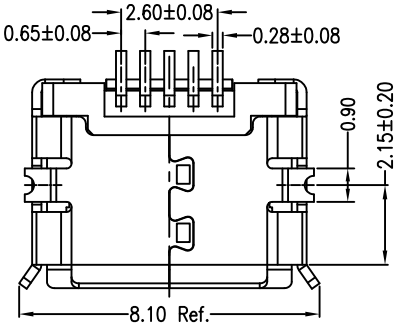

RECOMMANDED PCB LAYOUT PCB图仅供参考

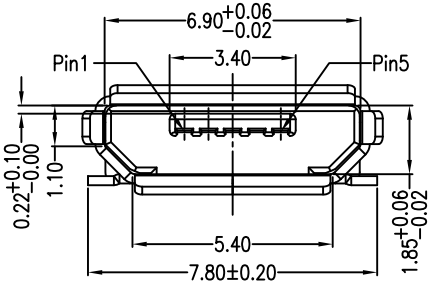Note:
1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min
- 2.7 Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERMSE

| | | | |
|---|---|---|---|
| X. | ±0.30 | X. | ±5.° |
| .X | ±0.25 | .X | ±2.° |
| .XX | ±0.15 | .XX | ±1.° |
| .XXX | ±0.10 | .XXX | ±0.5° |

# 深圳市精拓金电子有限公司

| | | | | | |
|---|---|---|---|---|---|
| 单位 UNITS | MM | 制图 DRAWING | 尹先华 | 制图料号 PRODUCT PART NO. | 920-D52A2021S10103 |
| 比例 SCALE | 1:1 | 审核 CHKD | 郭治富 | 产品名称 PRODUCT NO. | MICRO 5S B型两脚贴板有边无柱SMT端子 加长0.75 |
| 日期 DATE | 2021-04-16 | 核准 APPD | 黄国荣 | 角法 VIEW | 版本 VER A0 |

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## Jing extension:

912-112A1011D10100 920-A64A2091S101A3 906-552A1012D10200 912-112A2021S10100
912-312A1012D10100 906-752B1114D10200 907-312A1101Y10210 918-418K2022Y40011
904-232B2032S10100 906-262A1021D10200 911-221A2021S10100 917-B88C201AH70201
917-P81A202ES60201 918-415K3028S40000 918-468K2029Y50000 920-C52A2021S10105
904-331B2032S10200 905-761A2032S10200 907-111A1022D10200 920-154A2021Y10110
920-F52A2021S10105 904-232A2031S10100 918-318K2023C40005 919-162A1012D10400
920-A62A2021S10104 920-A62A2021S10108 920-C62A2021S10103 908-351A1011D10100
910-151A2021D10100 916-151A1022Y10200