

Downloaded from Arrow.com.

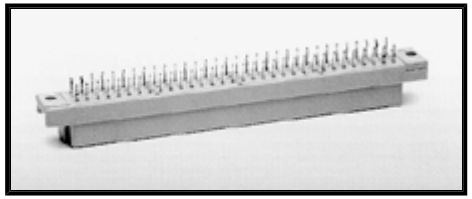


Type C
Female connector
contact spacing
.100" and .200"


Directive 2002/95/EC
„RoHS"
Compliant

(click on the schematic(s) for a more detailed view)

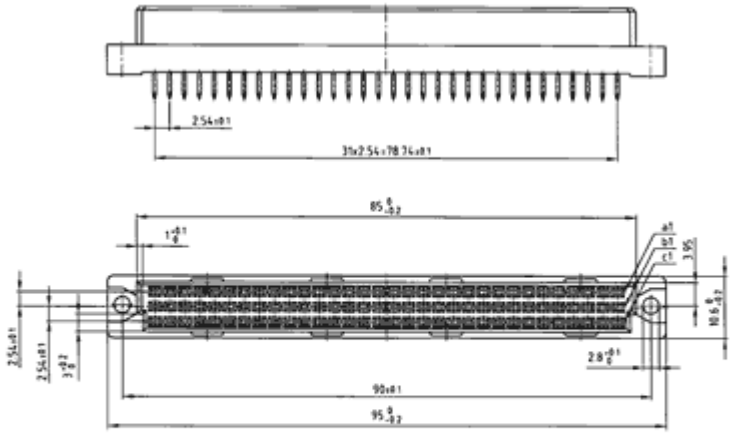

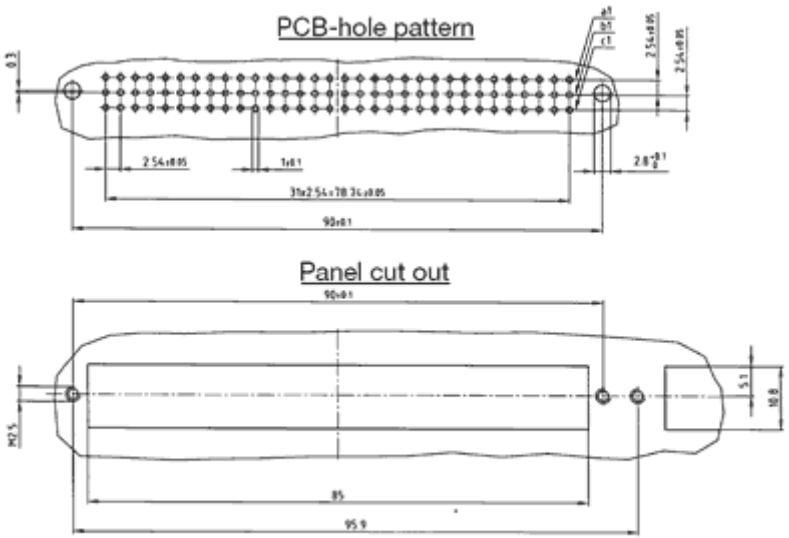

Downloaded from Arrow.com.

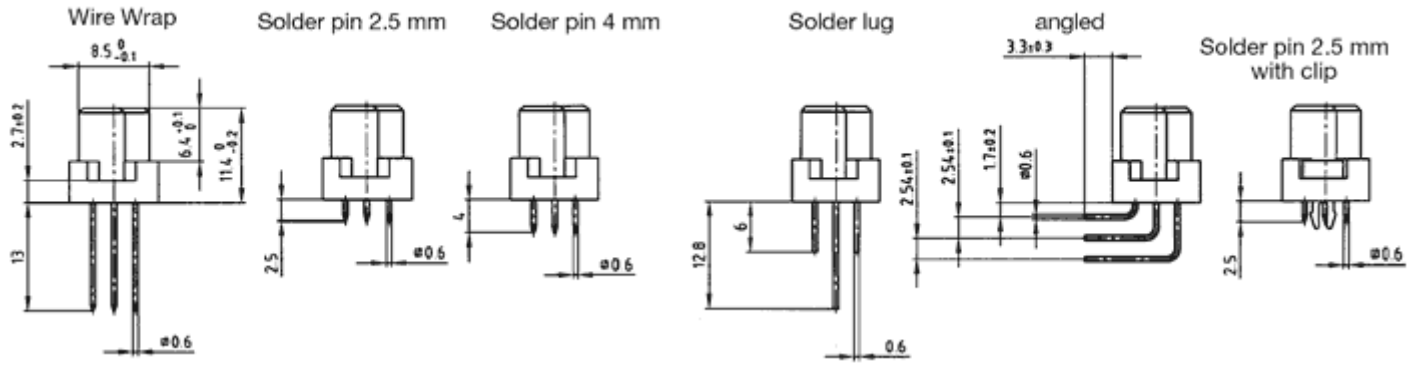

PDF drawings

Part number	PDF-format drawing
122A10299X	12K1A246.pdf
122A10309X	12V1IA9A.pdf

Please contact Conec for any missing PDF drawings

Part Numbers

No. of Pos.	• = contact + = no contact	Wire Wrap	Solder pin 2.5 mm	Solder pin 4 mm	Solder lug	Angled	Solder pin 2.5 mm with clip
32	Pos. 1 2 3 4 5 ... row a • • • • • • row b + + + + + + row c + + + + + +	122 A 10169 X	122 A 10219 X	122 A 10269 X	122 A 10319 X	122 A 10369 X	122 A 13249 X
32	Pos. 1 2 3 4 5 ... row a + • + • + • row b + + + + + + row c + • + • + •	122 A 10179 X	122 A 10229 X	122 A 10279 X	122 A 10329 X	122 A 10379 X	122 A 13259 X
64	Pos. 1 2 3 4 5 ... row a • • • • • •	122 A 10199 X	122 A 10249 X	122 A 10299 X PDF-format	122 A 10349 X	122 A 10399 X	122 A 13279 X

Downloaded from Arrow.com.

	row b + + + + + + row c • • • • • •			drawing			
96	Pos. 1 2 3 4 5 ... row a • • • • • • row b • • • • • • row c • • • • • •	122 A 10209 X	122 A 10259 X	122 A 10309 X PDF-format drawing	122 A 10359 X	122 A 10409 X	122 A 13289 X

Clip for PCB 0.1 + 2.8 ↳ mm, PCB-thickness = 1.6 mm

Back