Surface Mount Multilayer Ceramic Capacitors for RF Power Applications



FEATURES

- Case size 0505, 1111, 2525, and 3838
- Ultra-stable, high Q dielectric material
- Lead (Pb)-free terminations code “X”
- Tin/lead termination code “L”
- Non-magnetic copper termination code “C”
- Reliable Noble Metal Electrode (NME) system
- High frequency
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb Available

RoHS* Available

HALOGEN FREE GREEN (5-2008) Available

Note

* This datasheet provides information about parts that are RoHS-compliant and/or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information/tables in this datasheet for details.

APPLICATIONS

- MRI coils and generators
- RF instruments
- Lasers, CATV, UHF/microwave RF power amplifiers
- Filter networks, timing circuits
- Mixers, oscillators impedance matching networks

ELECTRICAL SPECIFICATIONS

Note

- Electrical characteristics at 25 °C unless otherwise specified

Operating Temperature: -55 °C to +125 °C

Capacitance Range:
0505: 0.1 pF to 100 pF
1111: 0.2 pF to 1000 pF
2525: 1.0 pF to 2700 pF
3838: 1.0 pF to 5100 pF

Voltage Rating:
0505: 200 V_{DC} to 250 V_{DC}
1111: 300 V_{DC} to 1500 V_{DC}
2525: 300 V_{DC} to 3600 V_{DC}
3838: 500 V_{DC} to 7200 V_{DC}

Temperature Coefficient of Capacitance (TCC):
C0G (D): 0 ppm/°C ± 30 ppm/°C from -55 °C to +125 °C with zero (0) V_{DC} applied

Dissipation Factor (DF):
C0G (D): 0.05 % max. at 1.0 V_{RMS} and 1 MHz for values ≤ 1000 pF

C0G (D): 0.05 % max. at 1.0 V_{RMS} and 1 kHz for values > 1000 pF

Aging Rate: 0 % maximum per decade

Insulation Resistance (IR):
at +25 °C and rated voltage 100 000 MΩ minimum or 1000 ΩF, whichever is less
at +125 °C and rated voltage 10 000 MΩ minimum or 100 ΩF, whichever is less

Dielectric Strength Test:
performed per method 103 of EIA-198-2-E.

Applied test voltages:
≤ 250 V_{DC}-rated: min. 250 % of rated voltage
300 V_{DC}-rated: min. 150 % of rated voltage
630 V_{DC}- to 1000 V_{DC}-rated: 150 % of rated voltage
1500 V_{DC} and up: 120 % rated voltage

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

QUICK REFERENCE DATA

DIELECTRIC	CASE	MAXIMUM VOLTAGE (V)	CAPACITANCE	
			MINIMUM	MAXIMUM
D = NP0	0505	250	0.1 pF	100 pF
	1111	1500	0.2 pF	1000 pF
	2525	3600	1.0 pF	2700 pF
	3838	7200	1.0 pF	5100 pF

Notes

- For values below 0.4 pF and tolerance ± 0.05 pF, contact mlccrf@vishay.com
  Detail ratings see “Selection Chart”

ORDERING INFORMATION

VJ0505	D	1R0	B	X	C	A	C
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING (1)	MARKING	PACKAGING
0505 1111 2525 3838	D = HIFREQ	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. An “R” indicates a decimal point. Examples: 1R0 = 1.0 pF	V = ± 0.05 pF B = ± 0.10 pF C = ± 0.25 pF D = ± 0.50 pF F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 % M = ± 20 % **Note** Details see “Selection Chart”	C = non-magnetic copper barrier 100 % tin plate matte finish X = Ni barrier 100 % tin plate matte finish L = Ni barrier with tin lead plated finish min. 4 % lead	C = 200 V P = 250 V D = 300 V E = 500 V L = 630 V I = 800 V G = 1000 V R = 1500 V F = 2000 V O = 2500 V H = 3000 V W = 3600 V S = 7200 V	A = no marking M = marking	T = 7" reel/plastic tape J = 7" reel (low quantity) R = 11 1/4"/13" reel/ plastic tape


Note

(1) DC voltage rating should not be exceeded in application

ENVIRONMENTAL STATUS

TERMINATION CODE	TERMINATION DESCRIPTION	RoHS COMPLIANT	VISHAY GREEN
X	Ni barrier 100 % tin plated matte finish	Yes	Yes
L	Ni barrier with tin lead plated finish min. 4 % lead	No	No
C	Cu barrier 100 % tin plated matte finish (non-magnetic)	Yes	Yes

DIMENSIONS in inches (millimeters)

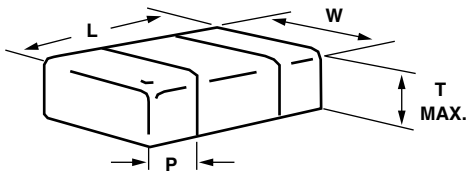

CASE CODE	STYLE	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATIONS PAD (P)	
					MINIMUM	MAXIMUM (1)
0505	VJ0505	0.055 ± 0.025 (1.40 ± 0.64)	0.055 ± 0.015 (1.40 ± 0.38)	0.057 (1.45)	0.004 (0.10)	0.016 (0.41)
1111	VJ1111	0.117 ± 0.028 (2.98 ± 0.70)	0.110 ± 0.030 (2.79 ± 0.76)	0.102 (2.59)	0.012 (0.30)	0.018 (0.46)
2525	VJ2525	0.250 + 0.020/- 0.030 (6.35 + 0.508/- 0.762)	0.250 ± 0.015 (6.35 ± 0.381)	0.102 (2.59)	0.010 (0.25)	0.030 (0.76)
3838	VJ3838	0.360 - 0.400 (9.14 - 10.15)	0.360 - 0.400 (9.14 - 10.15)	0.118 (3.00)	0.010 (0.25)	0.030 (0.76)

Note

(1) For copper terminations add 0.01 mm to maximum termination pad

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SELECTION CHART

DIELECTRIC (VISHAY CODE)		C0G (D)		
STYLE		VJ0505		TOLERANCE
CASE CODE		0505		
VOLTAGE (V_{DC})		200	250	
VOLTAGE CODE		C	P	
CAP. CODE	CAP.			
0R1	0.1 pF	•	•	B, C, D [1]
0R2	0.2 pF	•	•	B, C, D [1]
0R3	0.3 pF	•	•	B, C, D [1]
0R4	0.4 pF	•	•	V, B, C, D
0R5	0.5 pF	•	•	V, B, C, D
0R6	0.6 pF	•	•	V, B, C, D
0R7	0.7 pF	•	•	V, B, C, D
0R8	0.8 pF	•	•	V, B, C, D
0R9	0.9 pF	•	•	V, B, C, D
1R0	1.0 pF	•	•	V, B, C, D
1R1	1.1 pF	•	•	V, B, C, D
1R2	1.2 pF	•	•	V, B, C, D
1R3	1.3 pF	•	•	V, B, C, D
1R4	1.4 pF	•	•	V, B, C, D
1R5	1.5 pF	•	•	V, B, C, D
1R6	1.6 pF	•	•	V, B, C, D
1R7	1.7 pF	•	•	V, B, C, D
1R8	1.8 pF	•	•	V, B, C, D
1R9	1.9 pF	•	•	V, B, C, D
2R0	2.0 pF	•	•	V, B, C, D
2R1	2.1 pF	•	•	V, B, C, D
2R2	2.2 pF	•	•	V, B, C, D
2R4	2.4 pF	•	•	V, B, C, D
2R7	2.7 pF	•	•	V, B, C, D
3R0	3.0 pF	•	•	V, B, C, D
3R3	3.3 pF	•	•	V, B, C, D
3R6	3.6 pF	•	•	V, B, C, D
3R9	3.9 pF	•	•	V, B, C, D
4R3	4.3 pF	•	•	V, B, C, D
4R7	4.7 pF	•	•	V, B, C, D
5R1	5.1 pF	•	•	B, C, D
5R6	5.6 pF	•	•	B, C, D
6R2	6.2 pF	•	•	B, C, D
6R8	6.8 pF	•	•	B, C, D
7R5	7.5 pF	•	•	B, C, D
8R2	8.2 pF	•	•	B, C, D
9R1	9.1 pF	•	•	B, C, D
100	10 pF	•	•	F, G, J, K, M
110	11 pF	•	•	F, G, J, K, M
120	12 pF	•	•	F, G, J, K, M
130	13 pF	•	•	F, G, J, K, M
150	15 pF	•	•	F, G, J, K, M
180	18 pF	•	•	F, G, J, K, M
200	20 pF	•	•	F, G, J, K, M
220	22 pF	•	•	F, G, J, K, M
240	24 pF	•	•	F, G, J, K, M
270	27 pF	•	•	F, G, J, K, M
300	30 pF	•	•	F, G, J, K, M
330	33 pF	•	•	F, G, J, K, M
360	36 pF	•	•	F, G, J, K, M
390	39 pF	•	•	F, G, J, K, M
430	43 pF	•	•	F, G, J, K, M
470	47 pF	•	•	F, G, J, K, M
510	51 pF	•	•	F, G, J, K, M
560	56 pF	•	•	F, G, J, K, M
620	62 pF	•		F, G, J, K, M
680	68 pF	•		F, G, J, K, M
750	75 pF	•		F, G, J, K, M
820	82 pF	•		F, G, J, K, M
910	91 pF	•		F, G, J, K, M
101	100 pF	•		F, G, J, K, M

Notes

RoHS-compliant except when supplied with lead (Pb)-containing termination, code “L”

• Plastic carrier tape

[1] For values below 0.4 pF and tolerance ± 0.05 pF contact mlccrf@vishay.com

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SELECTION CHART

DIELECTRIC (VISHAY CODE)		C0G (D)				
STYLE		VJ1111				TOLERANCE
CASE CODE		1111				
VOLTAGE (V_{DC})		300	630	1000	1500	
VOLTAGE CODE		D	L	G	R	
CAP. CODE	CAP.					
0R2	0.2 pF	•	•	•	•	B, C, D [1]
0R3	0.3 pF	•	•	•	•	B, C, D [1]
0R4	0.4 pF	•	•	•	•	V, B, C, D
0R5	0.5 pF	•	•	•	•	V, B, C, D
0R6	0.6 pF	•	•	•	•	V, B, C, D
0R7	0.7 pF	•	•	•	•	V, B, C, D
0R8	0.8 pF	•	•	•	•	V, B, C, D
0R9	0.9 pF	•	•	•	•	V, B, C, D
1R0	1.0 pF	•	•	•	•	V, B, C, D
1R1	1.1 pF	•	•	•	•	V, B, C, D
1R2	1.2 pF	•	•	•	•	V, B, C, D
1R3	1.3 pF	•	•	•	•	V, B, C, D
1R4	1.4 pF	•	•	•	•	V, B, C, D
1R5	1.5 pF	•	•	•	•	V, B, C, D
1R6	1.6 pF	•	•	•	•	V, B, C, D
1R7	1.7 pF	•	•	•	•	V, B, C, D
1R8	1.8 pF	•	•	•	•	V, B, C, D
1R9	1.9 pF	•	•	•	•	V, B, C, D
2R0	2.0 pF	•	•	•	•	V, B, C, D
2R1	2.1 pF	•	•	•	•	V, B, C, D
2R2	2.2 pF	•	•	•	•	V, B, C, D
2R4	2.4 pF	•	•	•	•	V, B, C, D
2R7	2.7 pF	•	•	•	•	V, B, C, D
3R0	3.0 pF	•	•	•	•	V, B, C, D
3R3	3.3 pF	•	•	•	•	V, B, C, D
3R6	3.6 pF	•	•	•	•	V, B, C, D
3R9	3.9 pF	•	•	•	•	V, B, C, D
4R3	4.3 pF	•	•	•	•	V, B, C, D
4R7	4.7 pF	•	•	•	•	V, B, C, D
5R1	5.1 pF	•	•	•	•	V, B, C, D
5R6	5.6 pF	•	•	•	•	B, C, D
6R2	6.2 pF	•	•	•	•	B, C, D
6R8	6.8 pF	•	•	•	•	B, C, D
7R5	7.5 pF	•	•	•	•	B, C, D
8R2	8.2 pF	•	•	•	•	B, C, D
9R1	9.1 pF	•	•	•	•	B, C, D
100	10 pF	•	•	•	•	F, G, J, K, M
110	11 pF	•	•	•	•	F, G, J, K, M
120	12 pF	•	•	•	•	F, G, J, K, M
130	13 pF	•	•	•	•	F, G, J, K, M
150	15 pF	•	•	•	•	F, G, J, K, M
180	18 pF	•	•	•	•	F, G, J, K, M
200	20 pF	•	•	•	•	F, G, J, K, M
220	22 pF	•	•	•	•	F, G, J, K, M
240	24 pF	•	•	•	•	F, G, J, K, M
270	27 pF	•	•	•	•	F, G, J, K, M
300	30 pF	•	•	•	•	F, G, J, K, M
330	33 pF	•	•	•	•	F, G, J, K, M
360	36 pF	•	•	•	•	F, G, J, K, M
390	39 pF	•	•	•	•	F, G, J, K, M
430	43 pF	•	•	•	•	F, G, J, K, M
470	47 pF	•	•	•	•	F, G, J, K, M
510	51 pF	•	•	•	•	F, G, J, K, M
560	56 pF	•	•	•	•	F, G, J, K, M
620	62 pF	•	•	•	•	F, G, J, K, M
680	68 pF	•	•	•	•	F, G, J, K, M
750	75 pF	•	•	•	•	F, G, J, K, M
820	82 pF	•	•	•	•	F, G, J, K, M
910	91 pF	•	•	•	•	F, G, J, K, M

Notes

RoHS-compliant except when supplied with lead (Pb)-containing termination, code “L”

• Plastic carrier tape

[1] For values below 0.4 pF and tolerance ± 0.05 pF contact mlccrf@vishay.com

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SELECTION CHART

DIELECTRIC (VISHAY CODE)		C0G (D)				
STYLE		VJ1111				TOLERANCE
CASE CODE		1111				
VOLTAGE (V_{DC})		300	630	1000	1500	
VOLTAGE CODE		D	L	G	R	
CAP. CODE	CAP.					
101	100 pF	•	•	•	•	F, G, J, K, M
111	110 pF	•	•	•	•	F, G, J, K, M
121	120 pF	•	•	•		F, G, J, K, M
131	130 pF	•	•	•		F, G, J, K, M
151	150 pF	•	•	•		F, G, J, K, M
181	180 pF	•	•	•		F, G, J, K, M
201	200 pF	•	•			F, G, J, K, M
221	220 pF	•	•			F, G, J, K, M
241	240 pF	•	•			F, G, J, K, M
301	300 pF	•	•			F, G, J, K, M
331	330 pF	•	•			F, G, J, K, M
361	360 pF	•	•			F, G, J, K, M
391	390 pF	•	•			F, G, J, K, M
431	430 pF	•	•			F, G, J, K, M
471	470 pF	•	•			F, G, J, K, M
511	510 pF	•				F, G, J, K, M
561	560 pF	•				F, G, J, K, M
621	620 pF	•				F, G, J, K, M
681	680 pF	•				F, G, J, K, M
751	750 pF	•				F, G, J, K, M
821	820 pF	•				F, G, J, K, M
911	910 pF	•				F, G, J, K, M
102	1.0 nF	•				F, G, J, K, M

Notes

RoHS-compliant except when supplied with lead (Pb)-containing termination, code “L”

• Plastic carrier tape

(1) For values below 0.4 pF and tolerance ± 0.05 pF contact mlccrf@vishay.com

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SELECTION CHART

DIELECTRIC (VISHAY CODE)		C0G (D)									
STYLE		VJ2525									TOLERANCE
CASE CODE		2525									
VOLTAGE (V_{DC})		300	500	800	1000	1500	2000	2500	3000	3600	
VOLTAGE CODE		D	E	I	G	R	F	O	H	W	
CAP. CODE	CAP.										
1R0	1.0 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R1	1.1 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R2	1.2 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R3	1.3 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R4	1.4 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R5	1.5 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R6	1.6 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R7	1.7 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R8	1.8 pF	•	•	•	•	•	•	•	•	•	B, C, D
1R9	1.9 pF	•	•	•	•	•	•	•	•	•	B, C, D
2R0	2.0 pF	•	•	•	•	•	•	•	•	•	B, C, D
2R1	2.1 pF	•	•	•	•	•	•	•	•	•	B, C, D
2R2	2.2 pF	•	•	•	•	•	•	•	•	•	B, C, D
2R4	2.4 pF	•	•	•	•	•	•	•	•	•	B, C, D
2R7	2.7 pF	•	•	•	•	•	•	•	•	•	B, C, D
3R0	3.0 pF	•	•	•	•	•	•	•	•	•	B, C, D
3R3	3.3 pF	•	•	•	•	•	•	•	•	•	B, C, D
3R6	3.6 pF	•	•	•	•	•	•	•	•	•	B, C, D
3R9	3.9 pF	•	•	•	•	•	•	•	•	•	B, C, D
4R3	4.3 pF	•	•	•	•	•	•	•	•	•	B, C, D
4R7	4.7 pF	•	•	•	•	•	•	•	•	•	B, C, D
5R1	5.1 pF	•	•	•	•	•	•	•	•	•	B, C, D
5R6	5.6 pF	•	•	•	•	•	•	•	•	•	B, C, D
6R2	6.2 pF	•	•	•	•	•	•	•	•	•	B, C, D
6R8	6.8 pF	•	•	•	•	•	•	•	•	•	B, C, D
7R5	7.5 pF	•	•	•	•	•	•	•	•	•	B, C, D
8R2	8.2 pF	•	•	•	•	•	•	•	•	•	B, C, D
9R1	9.1 pF	•	•	•	•	•	•	•	•	•	B, C, D
100	10 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
110	11 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
120	12 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
130	13 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
150	15 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
160	16 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
180	18 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
200	20 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
220	22 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
240	24 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
270	27 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
300	30 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
330	33 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
360	36 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
390	39 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
430	43 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
470	47 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
510	51 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
560	56 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
620	62 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
680	68 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
750	75 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
820	82 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
910	91 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M

Notes

RoHS-compliant except when supplied with lead (Pb)-containing termination, code “L”

• Plastic carrier tape

- For tolerance B contact mlccrf@vishay.com

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SELECTION CHART

DIELECTRIC (VISHAY CODE)		C0G (D)									
STYLE		VJ2525									TOLERANCE
CASE CODE		2525									
VOLTAGE (V_{DC})		300	500	800	1000	1500	2000	2500	3000	3600	
VOLTAGE CODE		D	E	I	G	R	F	O	H	W	
CAP. CODE	CAP.										
101	100 pF	•	•	•	•	•	•	•	•	•	F, G, J, K, M
111	110 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
121	120 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
131	130 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
151	150 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
161	160 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
181	180 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
201	200 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
221	220 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
241	240 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
271	270 pF	•	•	•	•	•	•	•	•		F, G, J, K, M
301	300 pF	•	•	•	•	•	•				F, G, J, K, M
331	330 pF	•	•	•	•	•	•				F, G, J, K, M
361	360 pF	•	•	•	•	•	•				F, G, J, K, M
391	390 pF	•	•	•	•	•	•				F, G, J, K, M
431	430 pF	•	•	•	•	•	•				F, G, J, K, M
471	470 pF	•	•	•	•	•	•				F, G, J, K, M
511	510 pF	•	•	•	•	•					F, G, J, K, M
561	560 pF	•	•	•	•	•					F, G, J, K, M
621	620 pF	•	•	•	•	•					F, G, J, K, M
681	680 pF	•	•	•	•	•					F, G, J, K, M
751	750 pF	•	•	•	•	•					F, G, J, K, M
821	820 pF	•	•	•	•	•					F, G, J, K, M
911	910 pF	•	•	•	•	•					F, G, J, K, M
102	1.0 nF	•	•	•	•	•					F, G, J, K, M
112	1.1 nF	•	•	•	•	•					F, G, J, K, M
122	1.2 nF	•	•	•	•	•					F, G, J, K, M
152	1.5 nF	•	•	•							F, G, J, K, M
182	1.8 nF	•	•	•							F, G, J, K, M
222	2.0 nF	•	•	•							F, G, J, K, M
242	2.4 nF	•									F, G, J, K, M
272	2.7 nF	•									F, G, J, K, M

Notes

RoHS-compliant except when supplied with lead (Pb)-containing termination, code “L”

• Plastic carrier tape

- For tolerance B contact mlccrf@vishay.com

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SELECTION CHART

DIELECTRIC (VISHAY CODE)		C0G (D)						
STYLE		VJ3838						TOLERANCE
CASE CODE		3838						
VOLTAGE (V_{DC})		500	1000	2500	3600	5000	7200	
VOLTAGE CODE		E	G	O	W	M	S	
CAP. CODE	CAP.							
1R0	1.0 pF	•	•	•	•	•	•	B, C, D
1R1	1.1 pF	•	•	•	•	•	•	B, C, D
1R2	1.2 pF	•	•	•	•	•	•	B, C, D
1R3	1.3 pF	•	•	•	•	•	•	B, C, D
1R4	1.4 pF	•	•	•	•	•	•	B, C, D
1R5	1.5 pF	•	•	•	•	•	•	B, C, D
1R6	1.6 pF	•	•	•	•	•	•	B, C, D
1R7	1.7 pF	•	•	•	•	•	•	B, C, D
1R8	1.8 pF	•	•	•	•	•	•	B, C, D
1R9	1.9 pF	•	•	•	•	•	•	B, C, D
2R0	2.0 pF	•	•	•	•	•	•	B, C, D
2R1	2.1 pF	•	•	•	•	•	•	B, C, D
2R2	2.2 pF	•	•	•	•	•	•	B, C, D
2R4	2.4 pF	•	•	•	•	•	•	B, C, D
2R7	2.7 pF	•	•	•	•	•	•	B, C, D
3R0	3.0 pF	•	•	•	•	•	•	B, C, D
3R3	3.3 pF	•	•	•	•	•	•	B, C, D
3R6	3.6 pF	•	•	•	•	•	•	B, C, D
3R9	3.9 pF	•	•	•	•	•	•	B, C, D
4R3	4.3 pF	•	•	•	•	•	•	B, C, D
4R7	4.7 pF	•	•	•	•	•	•	B, C, D
5R1	5.1 pF	•	•	•	•	•	•	B, C, D
5R6	5.6 pF	•	•	•	•	•	•	B, C, D
6R2	6.2 pF	•	•	•	•	•	•	B, C, D
6R8	6.8 pF	•	•	•	•	•	•	B, C, D
7R5	7.5 pF	•	•	•	•	•	•	B, C, D
8R2	8.2 pF	•	•	•	•	•	•	B, C, D
9R1	9.1 pF	•	•	•	•	•	•	B, C, D
100	10 pF	•	•	•	•	•	•	F, G, J, K, M
110	11 pF	•	•	•	•	•	•	F, G, J, K, M
120	12 pF	•	•	•	•	•	•	F, G, J, K, M
130	13 pF	•	•	•	•	•	•	F, G, J, K, M
150	15 pF	•	•	•	•	•	•	F, G, J, K, M
160	16 pF	•	•	•	•	•	•	F, G, J, K, M
180	18 pF	•	•	•	•	•	•	F, G, J, K, M
200	20 pF	•	•	•	•	•	•	F, G, J, K, M
220	22 pF	•	•	•	•	•	•	F, G, J, K, M
240	24 pF	•	•	•	•	•	•	F, G, J, K, M
270	27 pF	•	•	•	•	•	•	F, G, J, K, M
300	30 pF	•	•	•	•	•	•	F, G, J, K, M
330	33 pF	•	•	•	•	•	•	F, G, J, K, M
360	36 pF	•	•	•	•	•	•	F, G, J, K, M
390	39 pF	•	•	•	•	•	•	F, G, J, K, M
430	43 pF	•	•	•	•	•	•	F, G, J, K, M
470	47 pF	•	•	•	•	•	•	F, G, J, K, M
510	51 pF	•	•	•	•	•	•	F, G, J, K, M
560	56 pF	•	•	•	•	•	•	F, G, J, K, M
620	62 pF	•	•	•	•	•	•	F, G, J, K, M
680	68 pF	•	•	•	•	•	•	F, G, J, K, M
750	75 pF	•	•	•	•	•	•	F, G, J, K, M
820	82 pF	•	•	•	•	•	•	F, G, J, K, M
910	91 pF	•	•	•	•	•	•	F, G, J, K, M

Notes

RoHS-compliant except when supplied with lead (Pb)-containing termination, code “L”

• Plastic carrier tape

- For tolerance B contact mlccrf@vishay.com

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

SELECTION CHART

DIELECTRIC (VISHAY CODE)		C0G (D)						
STYLE		VJ3838						TOLERANCE
CASE CODE		3838						
VOLTAGE (V_{DC})		500	1000	2500	3600	5000	7200	
VOLTAGE CODE		E	G	O	W	M	S	
CAP. CODE	CAP.							
101	100 pF	•	•	•	•	•	•	F, G, J, K, M
111	110 pF	•	•	•	•	•		F, G, J, K, M
121	120 pF	•	•	•	•	•		F, G, J, K, M
131	130 pF	•	•	•	•	•		F, G, J, K, M
151	150 pF	•	•	•	•	•		F, G, J, K, M
161	160 pF	•	•	•	•	•		F, G, J, K, M
181	180 pF	•	•	•	•	•		F, G, J, K, M
201	200 pF	•	•	•	•			F, G, J, K, M
221	220 pF	•	•	•	•			F, G, J, K, M
241	240 pF	•	•	•	•			F, G, J, K, M
271	270 pF	•	•	•	•			F, G, J, K, M
301	300 pF	•	•	•	•			F, G, J, K, M
331	330 pF	•	•	•	•			F, G, J, K, M
361	360 pF	•	•	•	•			F, G, J, K, M
391	390 pF	•	•	•	•			F, G, J, K, M
431	430 pF	•	•	•				F, G, J, K, M
471	470 pF	•	•	•				F, G, J, K, M
511	510 pF	•	•	•				F, G, J, K, M
561	560 pF	•	•	•				F, G, J, K, M
621	620 pF	•	•	•				F, G, J, K, M
681	680 pF	•	•	•				F, G, J, K, M
751	750 pF	•	•	•				F, G, J, K, M
821	820 pF	•	•					F, G, J, K, M
911	910 pF	•	•					F, G, J, K, M
102	1.0 nF	•	•					F, G, J, K, M
112	1.1 nF	•	•					F, G, J, K, M
122	1.2 nF	•	•					F, G, J, K, M
152	1.5 nF	•	•					F, G, J, K, M
182	1.8 nF	•	•					F, G, J, K, M
222	2.0 nF	•	•					F, G, J, K, M
242	2.4 nF	•						F, G, J, K, M
272	2.7 nF	•						F, G, J, K, M
302	3.0 nF	•						F, G, J, K, M
332	3.3 nF	•						F, G, J, K, M
392	3.9 nF	•						F, G, J, K, M
472	4.7 nF	•						F, G, J, K, M
512	5.1 nF	•						F, G, J, K, M

Notes

RoHS-compliant except when supplied with lead (Pb)-containing termination, code “L”

• Plastic carrier tape


- For tolerance B contact mlccrf@vishay.com

For technical questions, contact: mlccrf@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

QUAD HIGH FREQ DIELECTRIC - TYPICAL PARAMETERS


ESR VS. FREQUENCY
SIZE 0505 QUAD RF MLCC

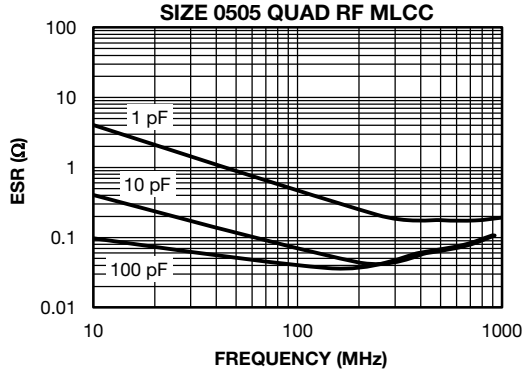


Q VALUE VS. FREQUENCY
SIZE 0505 QUAD RF MLCC

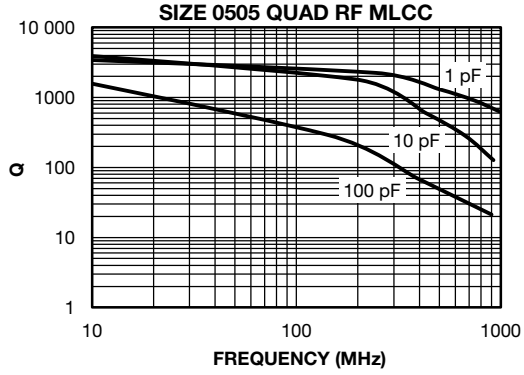


SRF VS. CAPACITANCE
SIZE 0505 QUAD RF MLCC

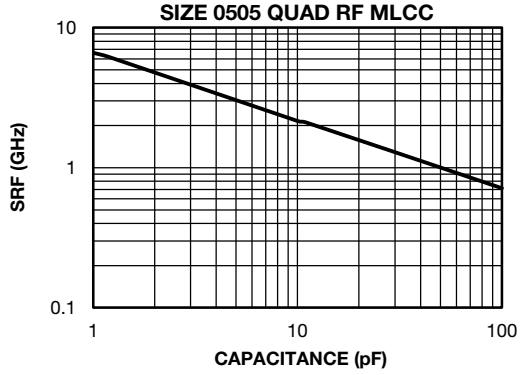


CURRENT RATING
SIZE 0505 QUAD RF MLCC, EXT. VOLTAGE

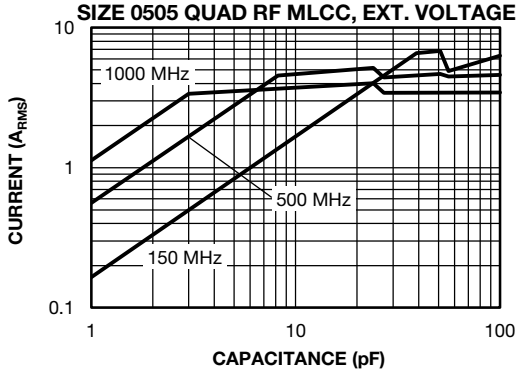

ESR VS. FREQUENCY
SIZE 1111 QUAD RF MLCC

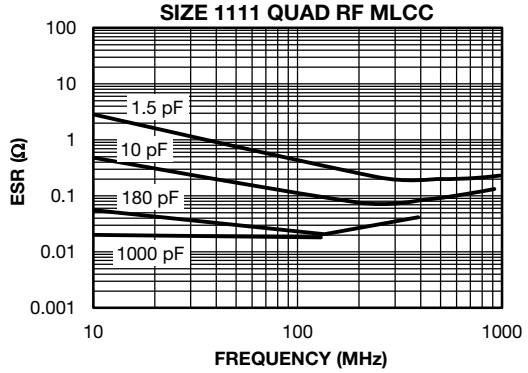

Q VALUE VS. FREQUENCY
SIZE 1111 QUAD RF MLCC

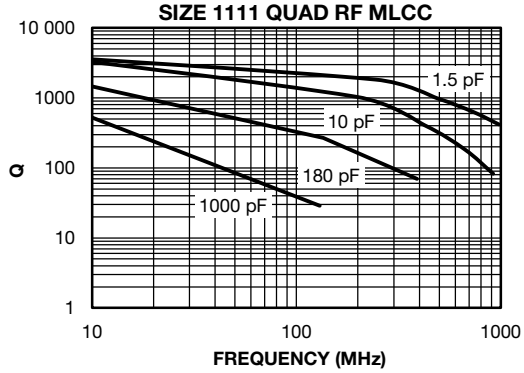


For technical questions, contact: mlccrf@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

QUAD HIGH FREQ DIELECTRIC - TYPICAL PARAMETERS


SRF VS. CAPACITANCE
SIZE 1111 QUAD RF MLCC

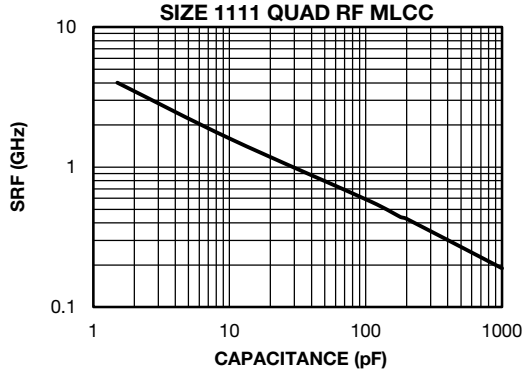


CURRENT RATING
SIZE 1111 QUAD RF MLCC, EXT. VOLTAGE

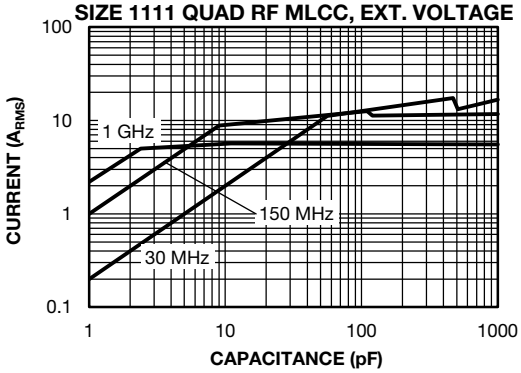


ESR VS. FREQUENCY
SIZE 2525 QUAD RF MLCC

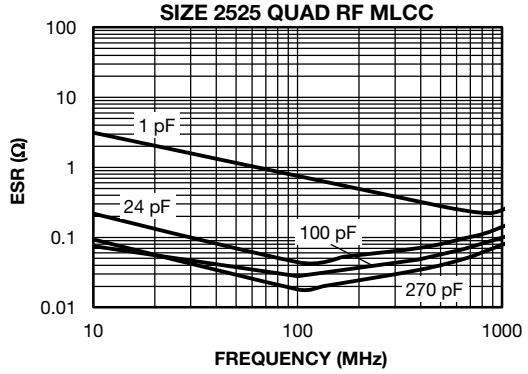


Q VALUE VS. FREQUENCY
SIZE 2525 QUAD RF MLCC

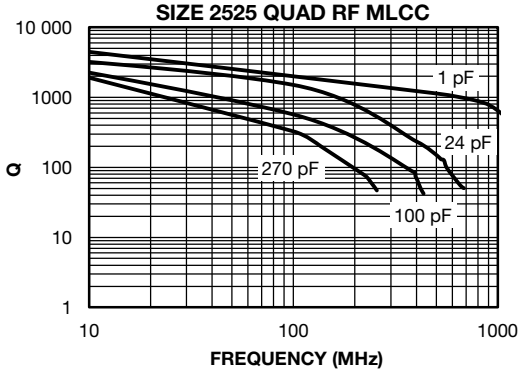

SRF VS. CAPACITANCE
SIZE 2525 QUAD RF MLCC

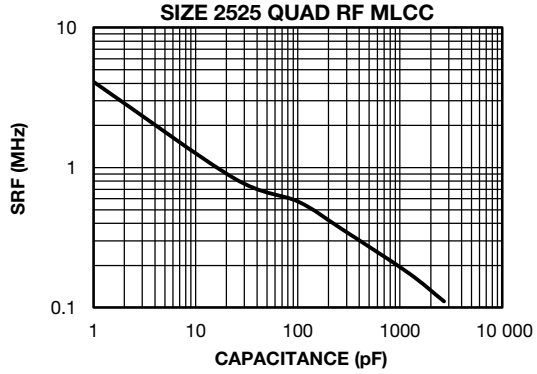

CURRENT RATING
SIZE 2525 QUAD RF MLCC, EXT. VOLTAGE

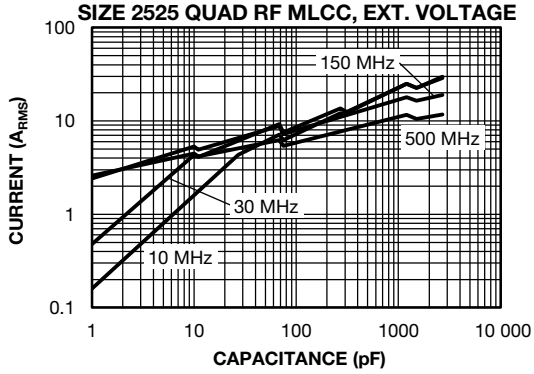


For technical questions, contact: mlccrf@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

QUAD HIGH FREQ DIELECTRIC - TYPICAL PARAMETERS


ESR VS. FREQUENCY
SIZE 3838 QUAD RF MLCC

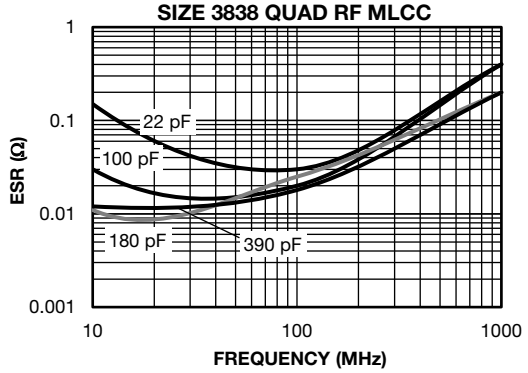


ESR VS. FREQUENCY
SIZE 3838 QUAD RF MLCC

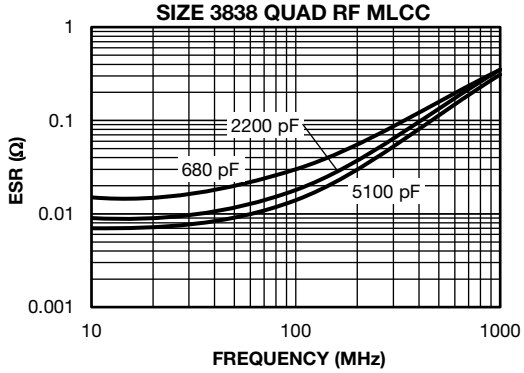


Q VALUE VS. FREQUENCY
SIZE 3838 QUAD RF MLCC

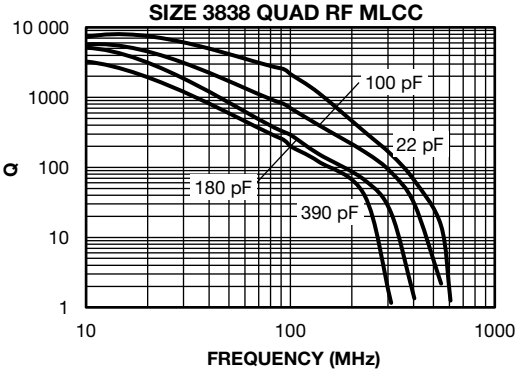


Q VALUE VS. FREQUENCY
SIZE 3838 QUAD RF MLCC

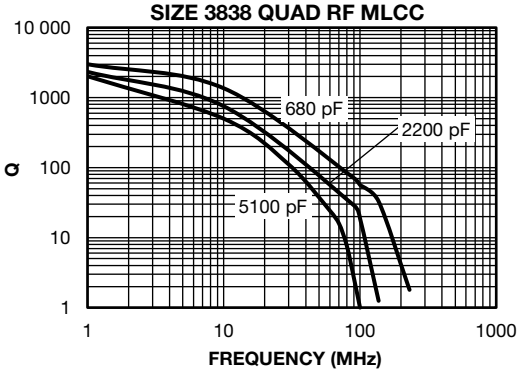

SRF VS. CAPACITANCE
SIZE 3838 QUAD RF MLCC

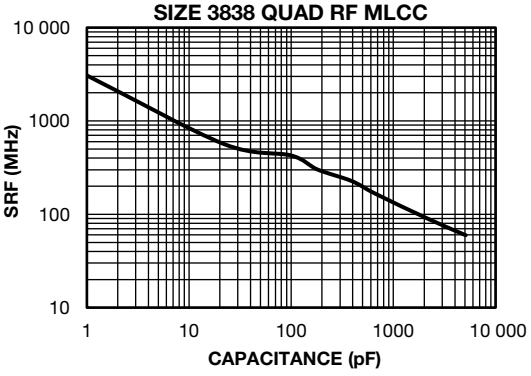

CURRENT RATING
SIZE 3838 QUAD RF MLCC, EXT. VOLTAGE

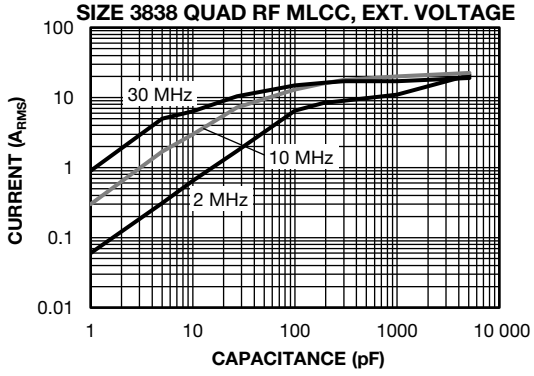


For technical questions, contact: mlccrf@vishay.com


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

QUAD HIGH FREQ DIELECTRIC - TYPICAL PARAMETERS


TEMPERATURE COEFFICIENT OF CAPACITANCE

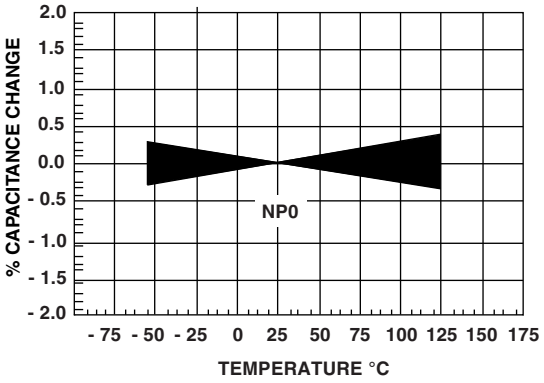


MIN. INSULATION RESISTANCE VS. TEMPERATURE

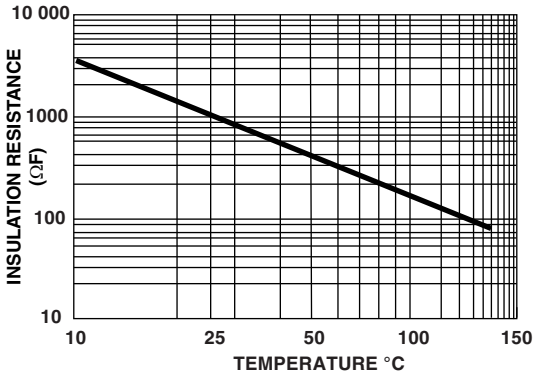

AGING RATE

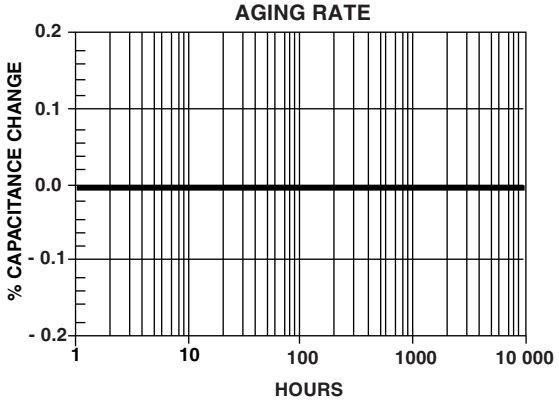

VOLTAGE COEFFICIENT OF CAPACITANCE

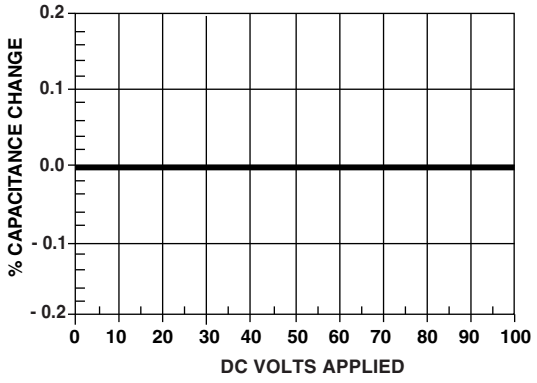

STANDARD PACKAGING QUANTITIES (1)(2)(3)(4)

CASE CODE	TAPE SIZE	7" REEL QUANTITIES		11 1/4" AND 13" REEL QUANTITIES
		PLASTIC TAPE PACKAGING CODE "T"	LOW QUANTITY "J"	PLASTIC TAPE PACKAGING CODE "R"
0505	8 mm	3000	1000	10 000
1111	8 mm	2500	1000	10 000
2525	12 mm	1000	500	n/a
3838	16 mm	400	n/a	n/a

Notes

(1) Vishay Vitramon uses embossed plastic carrier tape
(2) REFERENCE: EIA standard RS 481 - "Taping of Surface Mount Components for Automatic Placement"
(3) n/a = not available
(4) Final quantities for packaging can depend on product thickness

STORAGE AND HANDLING CONDITIONS

(1) Store the components at 5 °C to 40 °C ambient temperature and ≤ 70 % relative humidity conditions.
(2) The product is recommended to be used within a time-frame of 2 years after shipment (1 year for copper). Check solderability in case extended shelf life beyond the expiry date is needed.

Precautions:

a. Do not store products in an environment containing corrosive elements, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. This may cause corrosion or oxidization of the terminations, which can easily lead to poor soldering.
b. Store products on the shelf and avoid exposure to moisture or dust.
c. Do not expose products to excessive shock, vibration, direct sunlight and so on.

For technical questions, contact: mlccrf@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Vishay Intertechnology:

SM8S43AHE3_A/I SMBJ12CA-E3/52 CRCW1206270KJNEA PTCCL05H280HTE SQD50P08-28_GE3
WSL27265L000FEB CRCW08051M00FKEA PR02000204709JA100 CCF5510K0FKE36
CRCW040213K0FKTD MSS2P3-M3/89A PTF5610K000BYEK RCL12183R30FKEK LTO150H470R0JTE3
CRCW1206510KFKEA CRCW2512150RFKEGHP ILHB1806ER600V 293D337X96R3D2T-E3
RS0105R000FE12 SS2FN6HM3/H 1.5SMC91A-E3/57T ISOA200R11003JT LTO150H2R200JTE3
PR03000204700JAC00 SE20DLGHM3/I WSL2512R0300FTB VS-50RIA60 SUD50P04-08-GE3
BRT13-H-X006 PR01000101603JR500