



REV.	DATE	ECR NO.	DESCRIPTION
NC	07/31/05	–	INITIAL RELEASE
A	03/05/09	–	ADD "75Ohms" TO PART DESCRIPTION

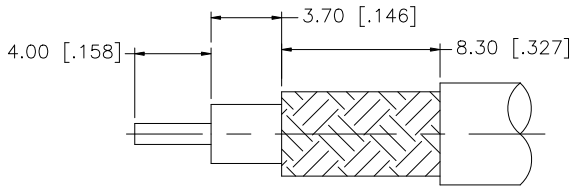

RECOMMENDED
CABLE STRIPPING DIM'S

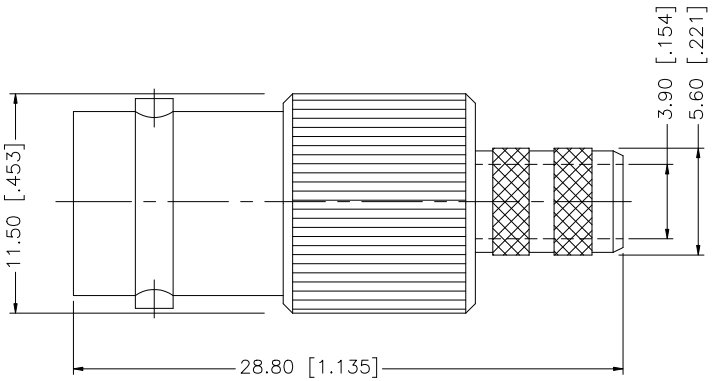

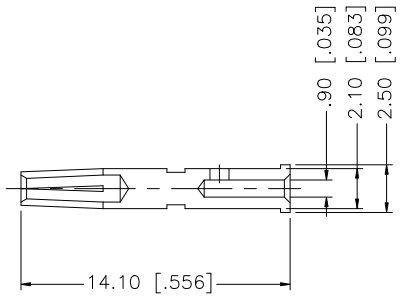

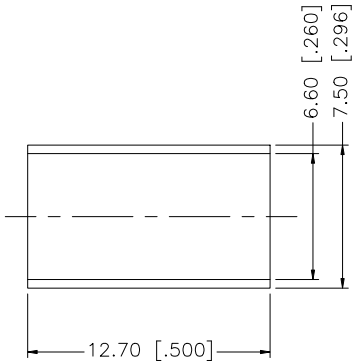

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

8				
7				
6				
5				
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	HOUSING/BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	03/05/09
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/112/112649.DWG

Amphenol Connex

PART DESCRIPTION: BNC CRIMP JACK, 75 Ohms

PART NO. 112649

DWG. NO.	REV.	SIZE	SCALE
112649.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

86093488314745V1LF 91614-403ALF 95157-140LF CD15S13E4RV09LF LD15P33E4GV00LF
86130202123355E1LF 863013A DEM09P032N 76384-316LF 54202-S08-07LF 68001-108HLF
69192-408HLF 70234-112LF 68000-236HLF 68001-200HLF D15P13A6RV12LF RJSBE5080C2
70430-164LF 67996-204HLF 86093968191755E3LF LD25S33E4GV00LF 86093967896755LF
86093968813H45V1LF 54202-G0805CLF 65781-158 70218-1116LF 68002116HLF DCMF37P
DAPO15S365TLF RJE061661210