
CUI Devices is now Same Sky! Learn More

SERIES: TBL-0014-750 | DESCRIPTION: TERMINAL BLOCK

FEATURES

- 1~6 poles
- 7.50 mm pitch
- blue, green, red, white, & yellow options
- UL safety approval



SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage (UL)	Use Group: B (1P/XP models) C (1P/XP models) D (1P/XP models)			 300/600 -/600 300/600	 V V V
rated current (UL)	Use Group: B (1P/XP models) C (1P/XP models) D (1P/XP models)			 40/40 -/40 10/5	 A A A
rated voltage (IEC)	Overvoltage Category/Pollution Degree: III/3 (1P/XP models) III/2 (1P/XP models) II/2 (1P/XP models)			 630/800 1,000/1,000 1,000/1,000	 V V V
rated current (IEC)	Overvoltage Category/Pollution Degree: III/3 (1P/XP models) III/2 (1P/XP models) II/2 (1P/XP models)			 41/41 41/41 41/41	 A A A
withstanding voltage	for 1 minute (1 pole model) for 1 mintue (all other pole models)		1,600 2,200		Vac Vac
surge voltage	1 pole model all other pole models			6,000 8,000	V V
contact resistance				20	mΩ
insulation resistance	at 500 Vdc	500			MΩ
operating temperature		-40		105	°C
safety approvals	UL 1059 certified, IEC 60947-7-4 compliant				
flammability rating	UL94V-0				
wave soldering	for maximum 5 seconds		260		°C
RoHS	yes				

PART NUMBER KEY


TBL - 0014 - 750 - XX XX


- Base Number
- No. of Poles: 01 02 03 04 05 06
- Body Color: BE = blue, GR = green, RD = red, WT = white, YL = yellow


MECHANICAL DRAWING

units: mm
tolerance:
X≤6.00: ±0.20 mm
6.00<X≤10.00: ±0.30 mm
10.00<X≤30.00: ±0.50 mm
30.00<X≤60.00: ±0.70 mm
60.00<X≤100.00: ±1.00 mm
100.00<X≤160.00: ±1.30 mm
X>160.00: ±1.60 mm
unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PA66 (UL94V-0)	
contacts	copper alloy	tin

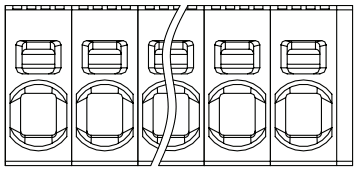

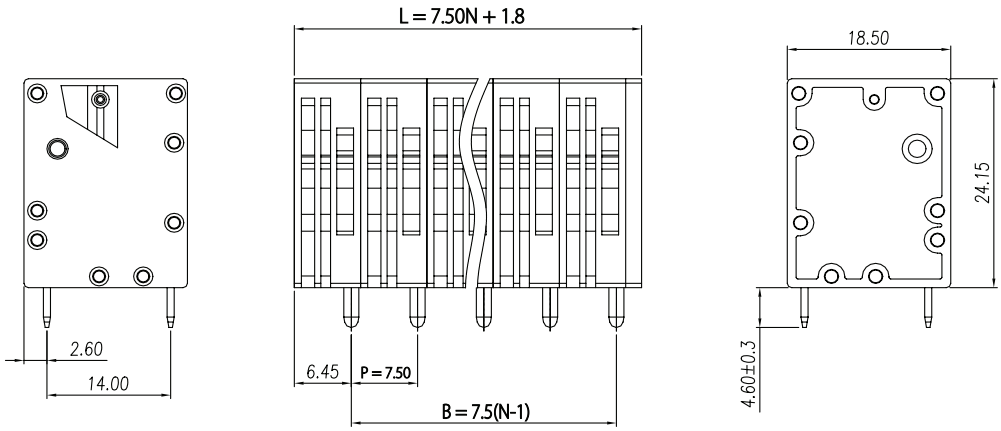

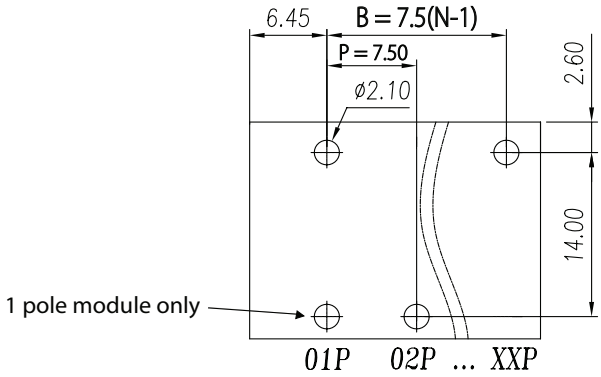

Recommended PCB Layout
Top View

WIRE ASSEMBLY		
	UL	IEC
Wire Range (solid/flexible)	24~8 AWG	0.2~10 mm²/ 0.2~6 mm²
Strip Length	15 mm	

This series is constructed of 1 pole modules where L is the total length, P is the pitch, and N is the number of poles.						
N	01	02	03	04	05	06
L	9.30	16.80	24.30	31.80	39.30	46.80
B	-	7.50	15.00	22.50	30.00	37.50

REVISION HISTORY

rev.	description	date
1.0	initial release	03/18/2024
1.01	CUI Devices rebranded to Same Sky	09/12/2024

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Same Sky:

TBP02P1-381-10BE UJ32-C-H-G-L1-MSMT-TR CMM-2718AT-42316-TR CP12437 HSE-B20350-NP CDM1222-12A-FW-F16-050-67 TB001-500-07BE CEB-20D64 CMC-6027-24T DS01C-254-S-03BE DS05-127-2-08BK-SMT-TR TBP01R2-508-10BE CFM-2507CF-0140-313 TBL004V-508-02BE-2GY CFM-2510B-0130-275 CFM-6015V-239-292-20 TBP01R1-508-14BE CBT-09427-SMT-TR CFM-9225V-117-177-20 CFM-A238BF-270-651 CMP-5247TF-K DS04-254-2-02BK-SMT TBP01P1-508-14BE TBP03R3-350-04BK CFM-8038BF-1150-662-22 HSS-B20-NP-12 PR4-5V-450-1A PJ-202AH RCJ-022 SJ1-3513