

Rocker Switch | **SRA1-2B-DC-1-NN**

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

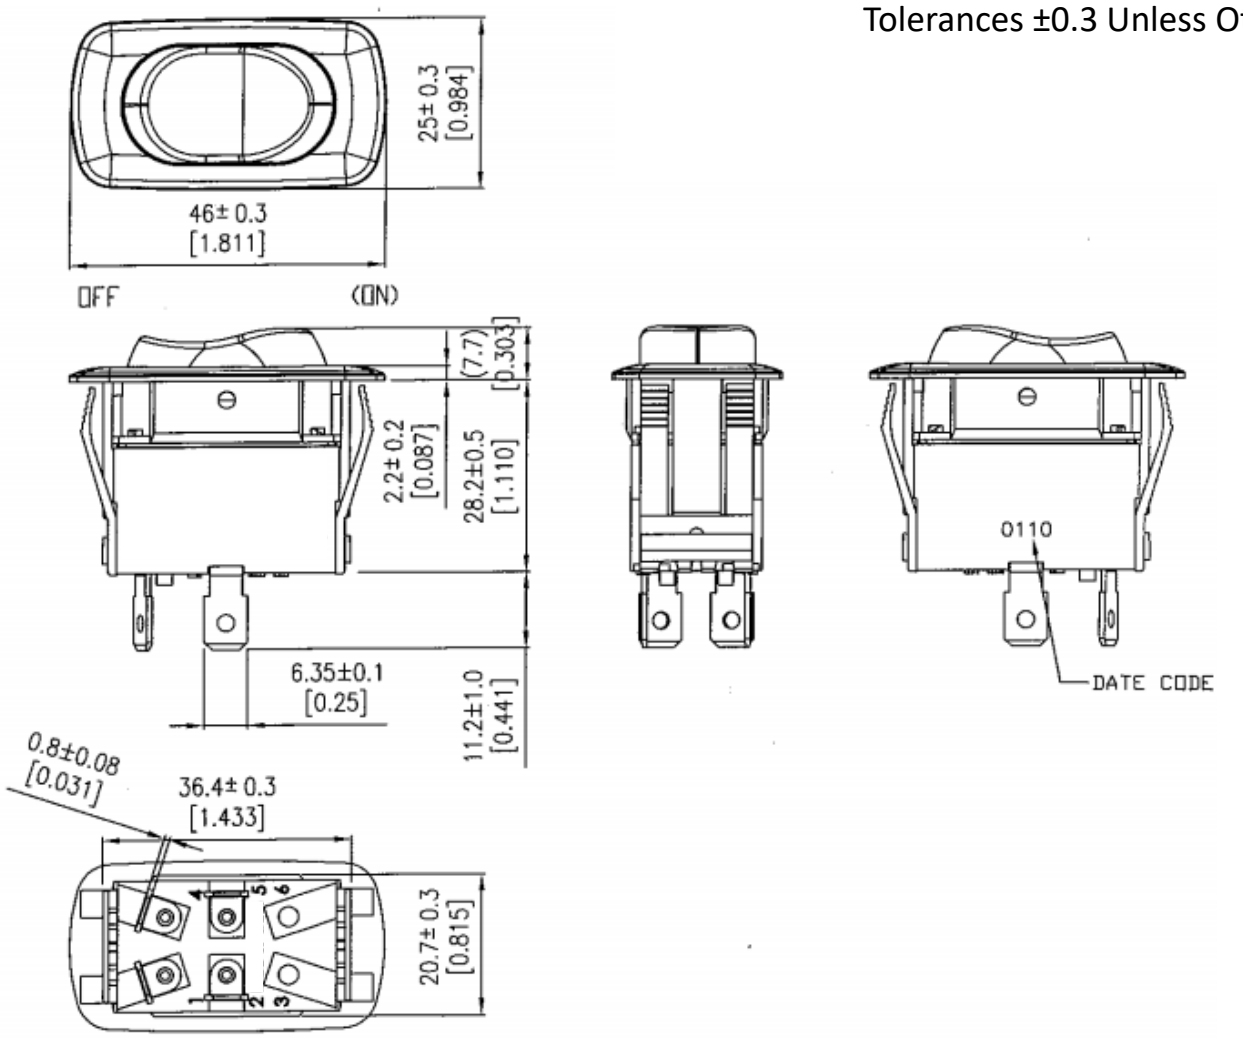

Mounting Hole

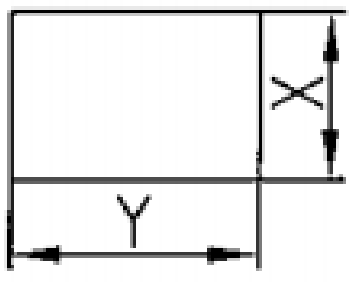

Thickness	X	Y
0.75~1.25	21.2+0.1	36.6+0.1
1.25~2	21.2+0.1	36.8+0.1
2~3	21.2+0.1	37.0+0.1

Circuit Diagram

4P DPST OFF-(ON)



Electrical Specifications

Rating	21A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

TB1-2H-DC-6 TE3-1A-DC-1-AL TE6-1A-DC-1-UL SRD2-2F-DC-1-RNN SRD1-2A-DC-1-BGN TA2-1A-DC-5 PB-1B-DC-2-RIL PD-1E-DC-9-UL RD2-1A-DC-1-AL PB-1A-DC-2-B SRD2-1G-DC-1-BNN SC-B SB-1B-DC-3-R SRB1-1G-DC-1-NN SRD2-2F-DC-1-BNN TE1-1F-DC-1-PB SRC1-1B-DC-1-B TA1-1A-DC-4 TA2-1G-DC-6-O SRA1-1A-DC-1-NN-2 RA4-2A-DC-2-AL RC-1A-DC-1-AL RF3-1A-DC-2-GL RG3-1A-DC-1-B WR1 PB-1A-DC-2-RDL RF1-1A-DC-2-B-3 SB-1B-DC-3-B SRA1-2F-DC-1-NN TC6-P1-Z