



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

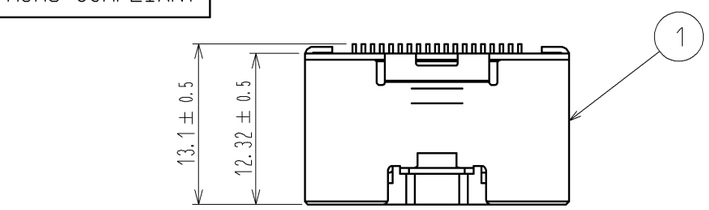


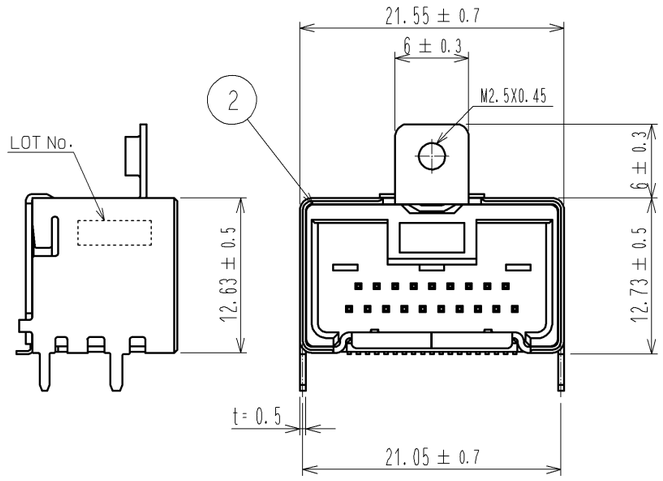


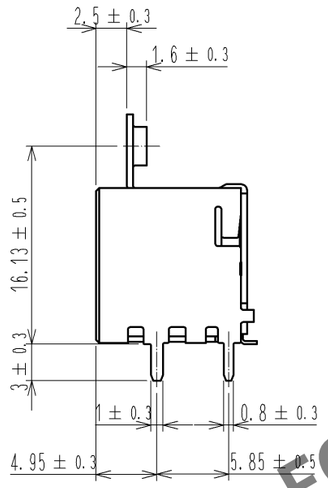

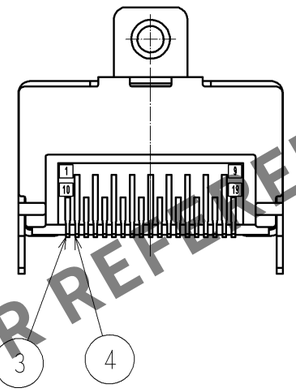


NOTES
1. RECOMMENDED REFLOW PROFILE (SEE RIGHT GRAPF)
   CYCLE TIME: UP TO 2 CYCLES OF REFLOW SOLDERING ARE POSSIBLE UNDER THE CONDITIONS, PROVIDED THAT THERE IS A RETURN TO NOMAL TEMPERATURE BETWEEN THE FIRST AND SECOND CYCLE.
   PEAK TEMPERATURE: 250℃
   230℃ MIN. FOR 20 TO 40 SECONDS.
   PREHEATING AREA 150~180℃ FOR 60 TO 120 SECONDS.
2. HAND SOLDERING: 280-300℃, 2S MAX.
3. CONTACT COPLANARITY: 0.1mm MAX.
4. RECOMMENDED THICKNESS OF PCB: 1.6mm
5. RECOMMENDED THICKNESS OF SOLDERING PASTE: 0.15mm

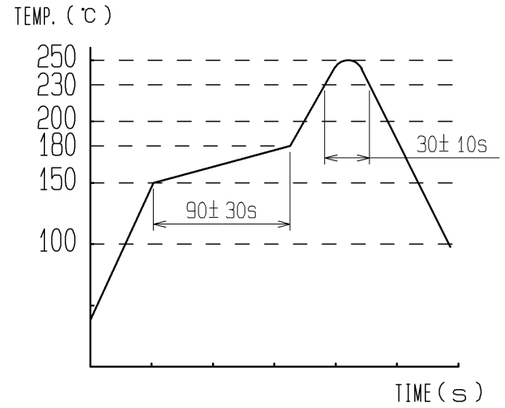


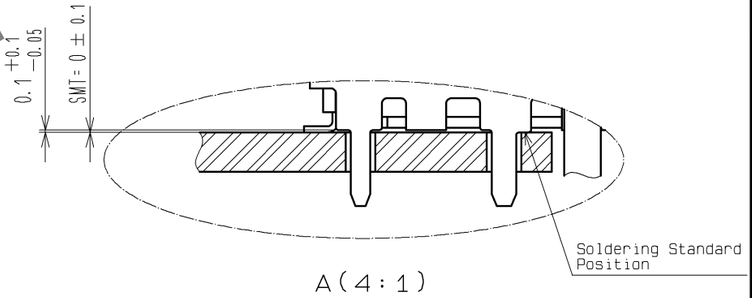


A (4 : 1)

HRS DRAWING FOR REFERENCE




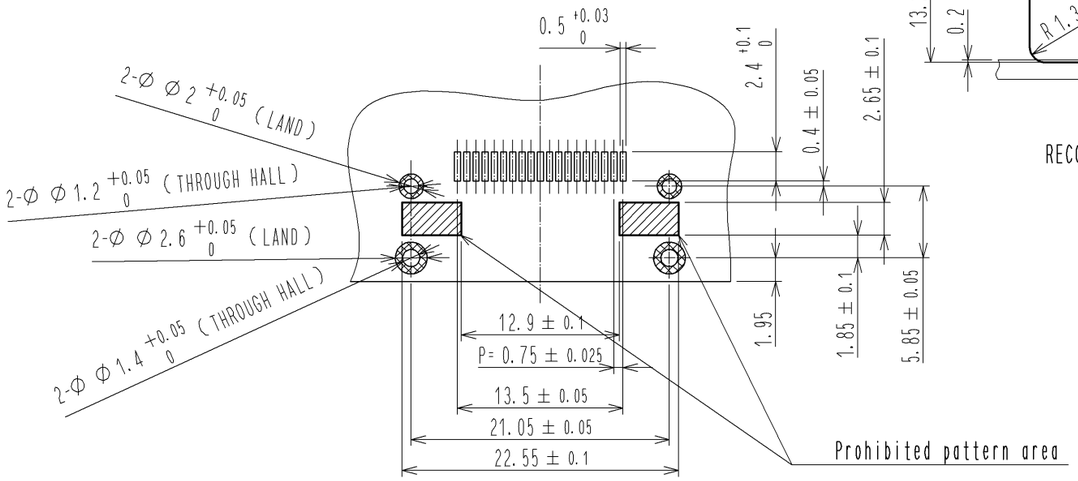

RECOMMENDED PCB LAYOUT

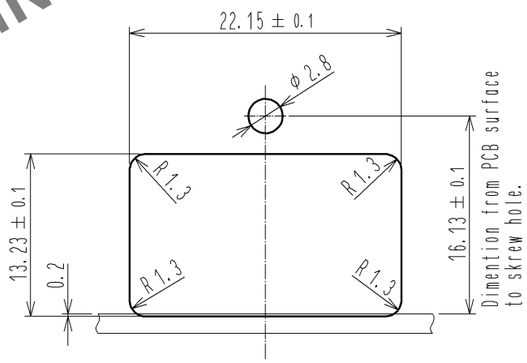

RECOMMENDED PANNEL LAYOUT

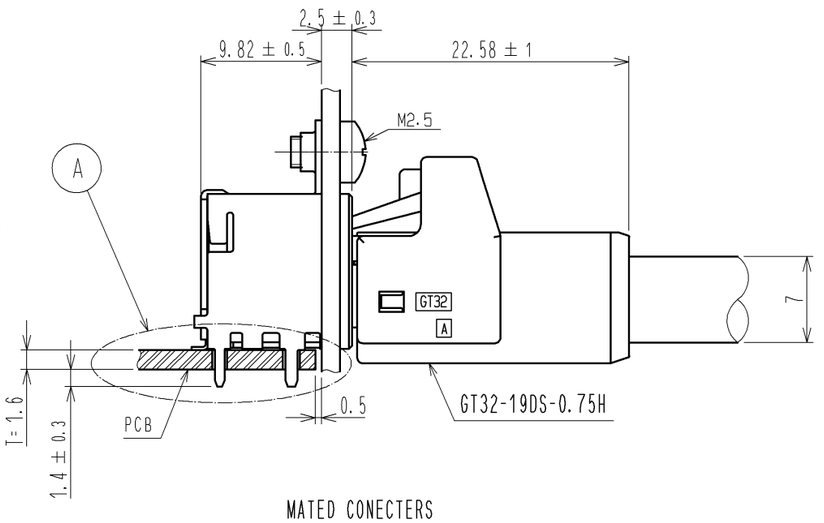

MATED CONECTERS

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
2	PA	GRAY	4	BRASS	TIN PLATED
1	COPPER ALLOY	TIN PLATED	3	BRASS	TIN PLATED

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	3	1	DIS-T-004064	NK. IKUTA	TS. KUBOTA	14. 09. 19

HIROSE ELECTRIC CO., LTD.

APPROVED	AR. SHIRAI	12. 03. 02	DRAWING NO. EDC3-168826-00
CHECKED	NH. NAKATA	12. 03. 01	PART NO. GT32-19DP-0. 75H
DESIGNED	MH. SHOUJI	12. 02. 20	
DRAWN	MH. SHOUJI	12. 02. 20	CODE NO. CL782-0009-3-00

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKAGE SPECIFICATIONS

①. Place the connectors into the tray. (Cf. Figure of tray shape)
QTY per tray: 77pcs

②. Put the tray for six steps in turn and wind up a PP band.
Top(the sixth step) is an empty tray.

△3 ③. Put it in a cardboard box (W=267 H=126 D=365)
QTY per cardboard: 385 pcs

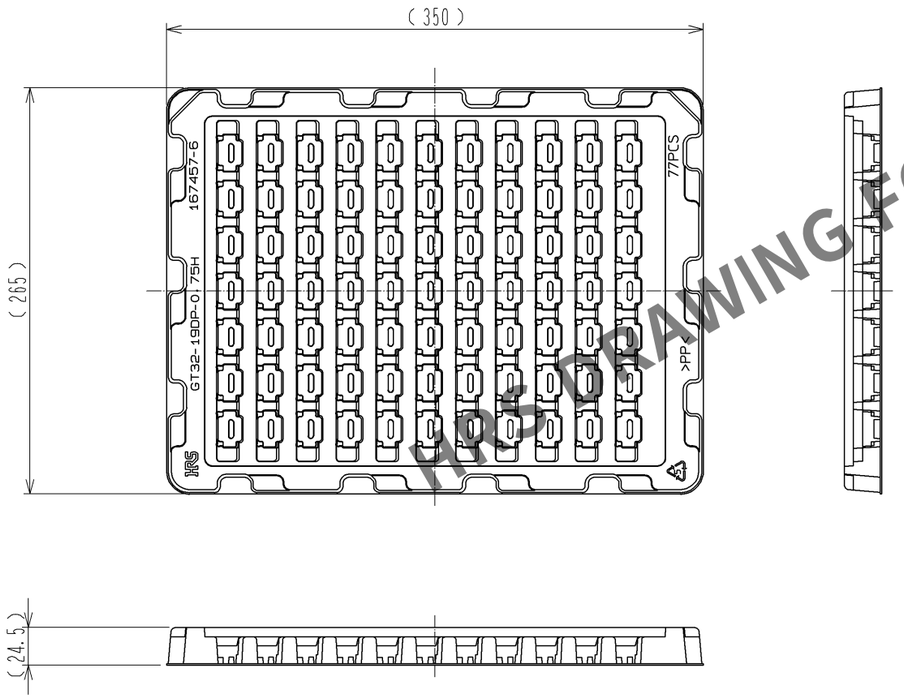


Figure of tray shape

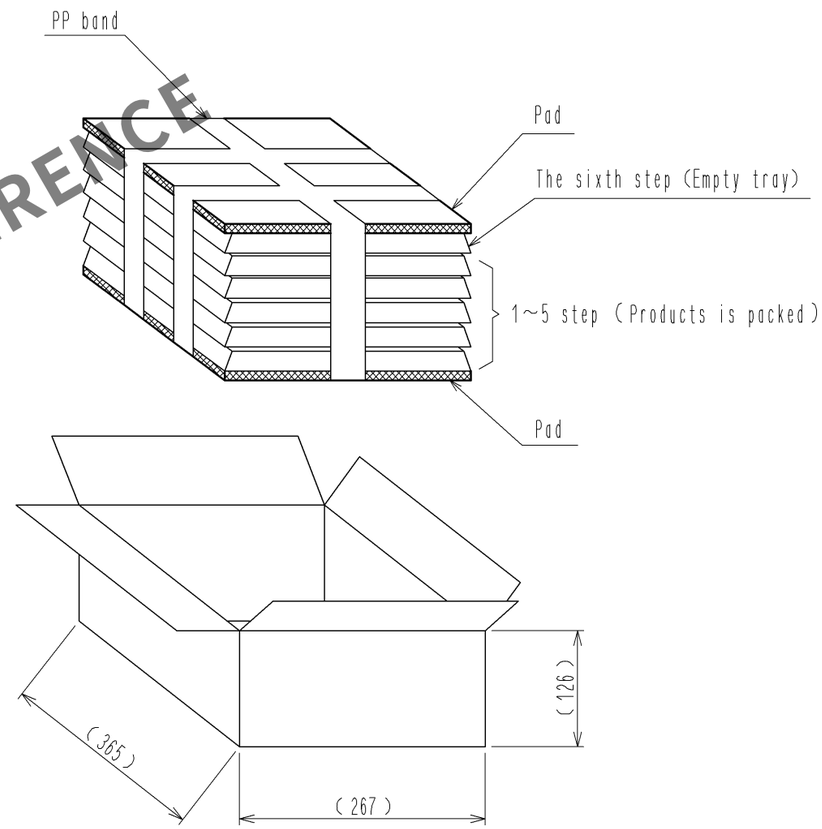


Figure of packing

FOR REFERENCE
HRS DRAWING

HRS	図番：	EDC3-168826-00
	製品名：	GT32-19DP-0.75H
	製品コード	CL782-0009-3-00 △3 2/2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

DF11-16DP-2DSA(24) GT8E-6S-HU ZH05-20DP-HU(B) DF22A-1416SCFA HDE-CTH(10) RM12BRD-2PH(81) ZE05H-12DP-2H FH41-50S-0.5SH(28) RM15TRH-10PH(81) DF36A-25P-SHL FH41-30S-0.5SH(05) ZE05-24DP-2H DF65-4P-1.7V(21) DF33C-4S-3.3C DF40C-50DP-0.4V(51) DF52-4P-0.8C DF59M-2224PCF FX18-60S-0.8SH FH72-21S-0.3SHW FX18-80S-0.8SH ZE05H-4P-2V(A) FH35C-19S-0.3SHW(50) DF17(3.0)-40DS-0.5V(57) DF19A-3032SCFA(41) DF57AH-5S-1.2C BM29B0.6-4DS/2-0.35V(51) DF62C-4S-2.2C FX8-120S-SV(22) RM15TP-2PA(81) ZE064W-8DP-HU/R(A)