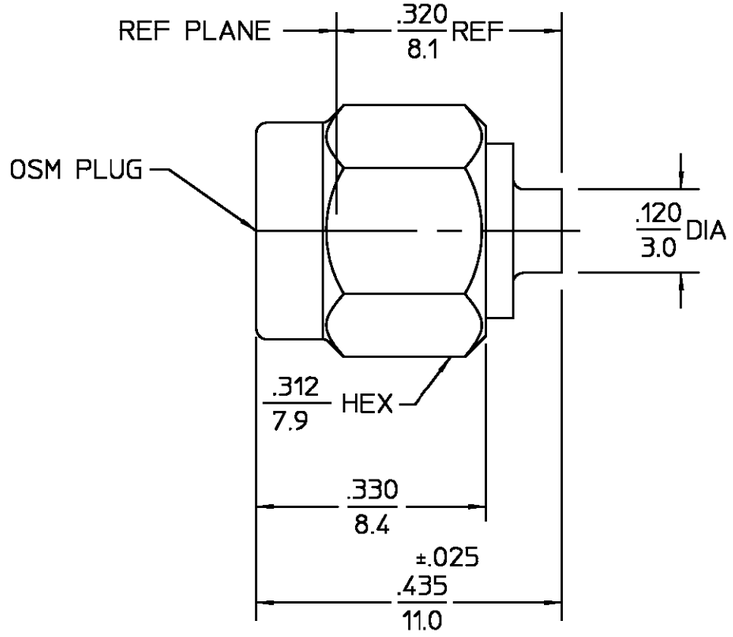


DESIGNED FOR USE WITH .085 DIA S.R. CABLE	
CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.021
HOUSING	.087

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01_1	REVISED	T.W. 10/22/96	DC 10/23/96

ELECTRICAL	
Nominal Impedance (Ohms)	50 ±3
Frequency Range (GHz) DC to	18.0
Volt Rating (VRMS MAX)	
@ Sea Level	335
VSWR	1.10 Max at 6(GHz)
Insertion Loss (dB MAX)	.10 at 6(GHz)
RF Leakage (dB MIN)	-90 at 6-8(GHz)
Corona, 70,000 Ft (VRMS MIN)	250
Dielectric Withstanding Voltage	
(VRMS MIN) @ Sea Level	1000
Contact Resistance (Milliohms MAX)	
Center Contact	3.0
Outer Contact	2.0
Cable to Housing	0.5
RF High Potential @ Sea Level	
(VRMS MIN @ 5 MHz)	670
I.R.(Megohms MIN)	5,000

MECHANICAL	
Interface Dimensions MIL-STD-348A	
Fig.	310.1
Recommended Mating	
Torque	7 to 10 In-LBs
Mating Characteristics:	
Insertion (MAX Lbs)	N/A
Withdrawal (MIN Oz)	N/A
Force to Engage and	
Disengage (In-Lbs MAX)	2.0
Center Contact Captivation	
Axial (Lbs)	N/A
Radial (In-Oz)	N/A
Cable Retention	
Axial Force (Lbs)	30
Torque (In-Oz)	16
Weight (Grams)	T.B.D.

ENVIRONMENTAL
Temperature Rating -55°C to +175°C
Vibration MIL-STD-202, Method 204, Condition B
Shock MIL-STD-202, Method 213, Condition C
Thermal Shock MIL-STD-202, Method 107, Condition B,
Moisture Resistance MIL-STD-202, Method 106
Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray

.XXX = in
XX.X = mm (REF)

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204
COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, OR ASTM-B-197, ALLOY C17300 CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCE ON
FRAC. ± 1/64 DEC. ±.005 ANGLES ± 1°

DRAWN BY	M. CATIZONE	DATE 3/31/88
CHECKED BY	K. C. MAHER	4/1/88
APP'D BY	F. P. Y.	4/6/88

These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

USE ASS'Y PROCEDURE

408-04762
NO. A.P. (20-004)

AMP
AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

TITLE OSM STRAIGHT CABLE PLUG DIRECT SOLDER ATTACHMENT

SIZE	CODE IDENT NO.		REV
B	26805	2001-5506-94	01_1
SCALE 5:1			SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1080761-1
SHEET 1 OF 1 REV A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2-292161-3 U5254-000005-030PA 1-794222-0 2005330-1 2834055-1 CPF0402B37K4E1 RH73H2A40MKTN ROX05SJ18R SBCHE154R7K SMW73R0JT 650075-000 SBCHE64R7K TE50BR39J 141991-2 1743455-2 2377783-2 2380312-2 3430B2F51RTDF 936348-1 1-962915-1 1393431-1 175977-2 1969656-1 1903112-2 3-1393225-0 3631B101LL 917696-1 CRGCQ2010J3K3 2310537-1 MPT100C18RF