




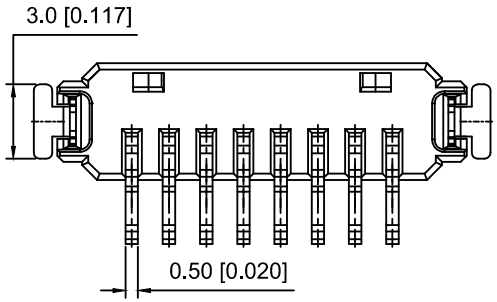

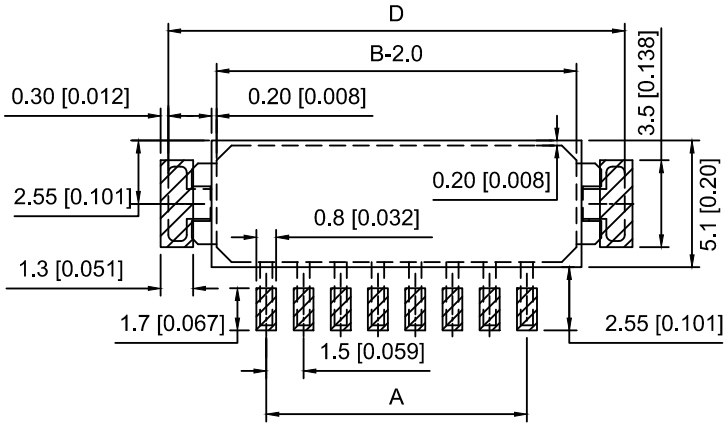

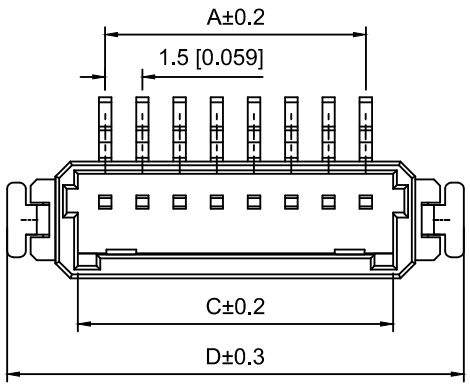

Recommended PCB Layout
General Tolerance:±0.05

Specifications:
规格：
Voltage rating:350V AC/DC
额定电压：350V AC/DC
Current rating:A AC/DC
额定电流：3A AC/DC
Withstanding voltage:500V AC/minute
耐受电压：500V AC/分钟
Temperature range:-40℃-+105℃
温度范围：-40℃-+105℃
Insulation resistance:≥500MΩ
绝缘电阻：≥500MΩ
Contact resistance:≤10mΩ
接触电阻：≤10mΩ

X1511	W	V	S	- 02	A - LP	SN
①	②	③	④	⑤	⑥	⑦	⑧

1.Series No
2.Category:W-Wafer
3.Welding Board Angle:V-Stright 180°
4.Welding Way:S-SMT
5.Row No.Pin No:XX-02~08 Pin
6.Special No:A-bonding pad on the edge; at the side
7Material:LP-LCP UL94V-0
8.Plating:SN-Matte Tin Plated

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	7.50	3.70	9.40
03	3.00	9.00	5.20	10.90
04	4.50	10.50	6.70	12.40
05	6.00	12.50	8.20	13.90
06	7.50	13.50	9.70	15.40
07	9.00	15.00	11.20	16.90
08	10.50	16.50	12.70	18.40

X1511WVS-02A-LPSN	LCP	Brass	X1511H-A	X1511T-A
PART N0	Material	Material(Pin)	Suitable XKB Wafer	Suitable XKB Terminal

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

DSND		SCALE: N/A	MODEL TYPE: 1.5mm Crimp Style Connector
DWN		VIEW:	PART NO.: X1511WVS-02A-LPSN
CHKD		UNIT: mm/in	DWG NO.: X-X1511WVS-02A-LPSN
APPD		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0