
A

contact arrangement

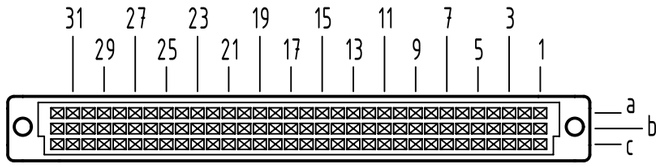

96 solder-contacts


⊠ = solder-contact


■ = kinked solder-contact


□ = position without contact

A


board drillings

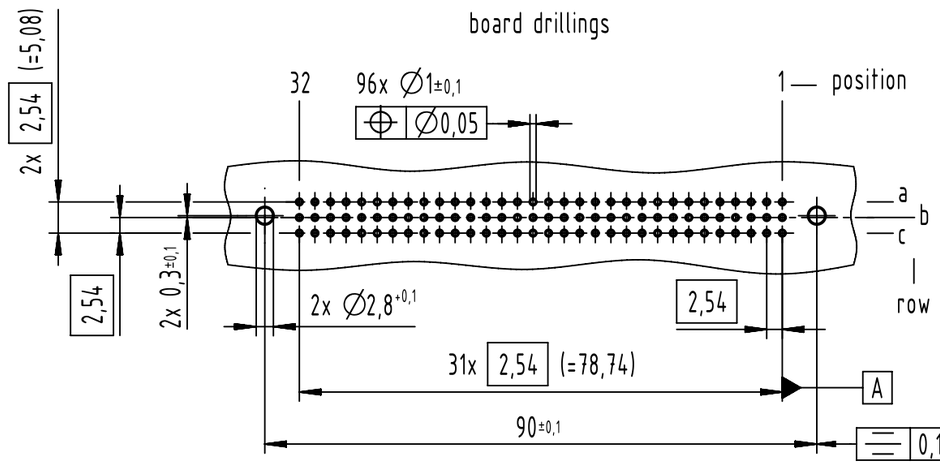


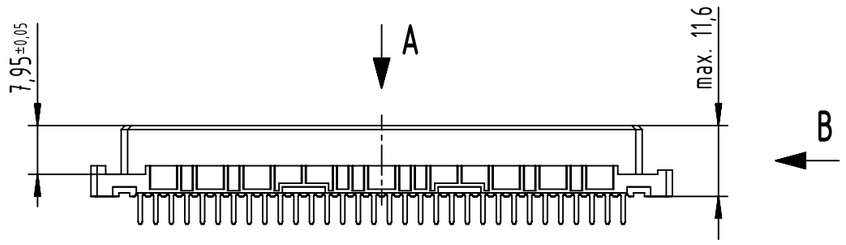

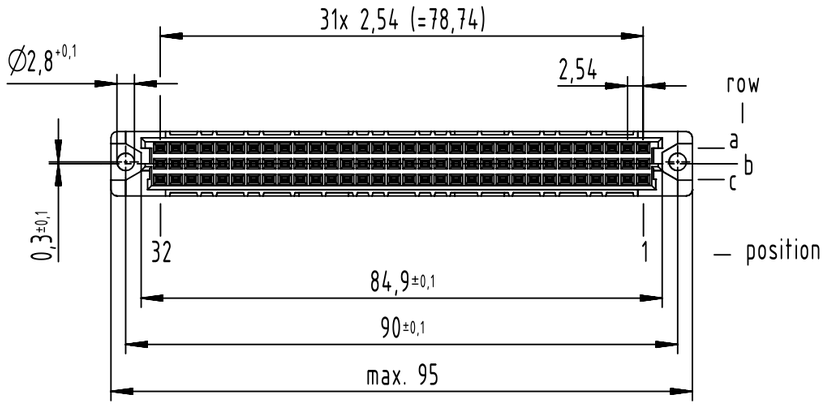

B (2:1)

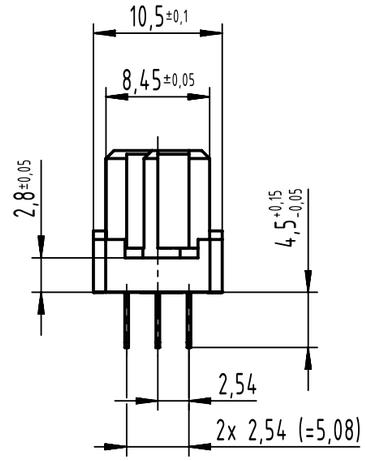

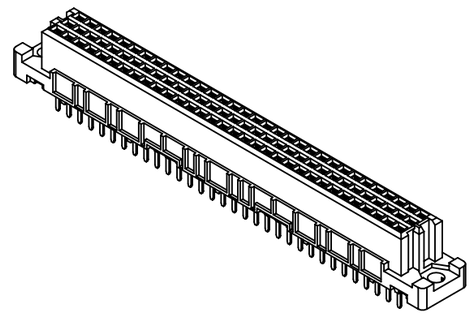

part no.	performance level
09 03 296 4825	Au70
09 03 296 8825	Au50
09 03 296 7825	3
09 03 296 6825	2
09 03 296 2825	1

further information see product data sheet

All Dimensions in mm Original Size DIN A3	Scale 1:1	Free size tol. IEC 60603-2			Ref.	
					Sub.	
All rights reserved	Created by STORCK	Inspected by LEHNERT	Standardisation 302077	Date 2021-03-12	State Final Release	
Department EL PD	Title DIN Signal type C female solder 4.5 96-pole				Doc-Key / ECM-Nr. 1001738S2/UGD/156/H 500000190783	
HARTING D-32339 Espelkamp	Type TB	Number 0903296X825			Rev. H	Page 1/1

A3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HARTING:

09200031250 19200161540 09 14 017 3101 09651616711 09670255601 19300240467 19400160513 21033212818 09200031640 09300161430 09670254701 09694115136 19300160232 09000005341 09120173001 09140033003 09140083117 09300245425 09330062648 09 20 003 0301 19200100290 19591204012 09 15 004 3013 09400030311 21470000003 09 12 007 3001 09 14 000 9950 09 14 003 3101 09000005103 09110006131