
THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-008764	06-27-14	DM	DM

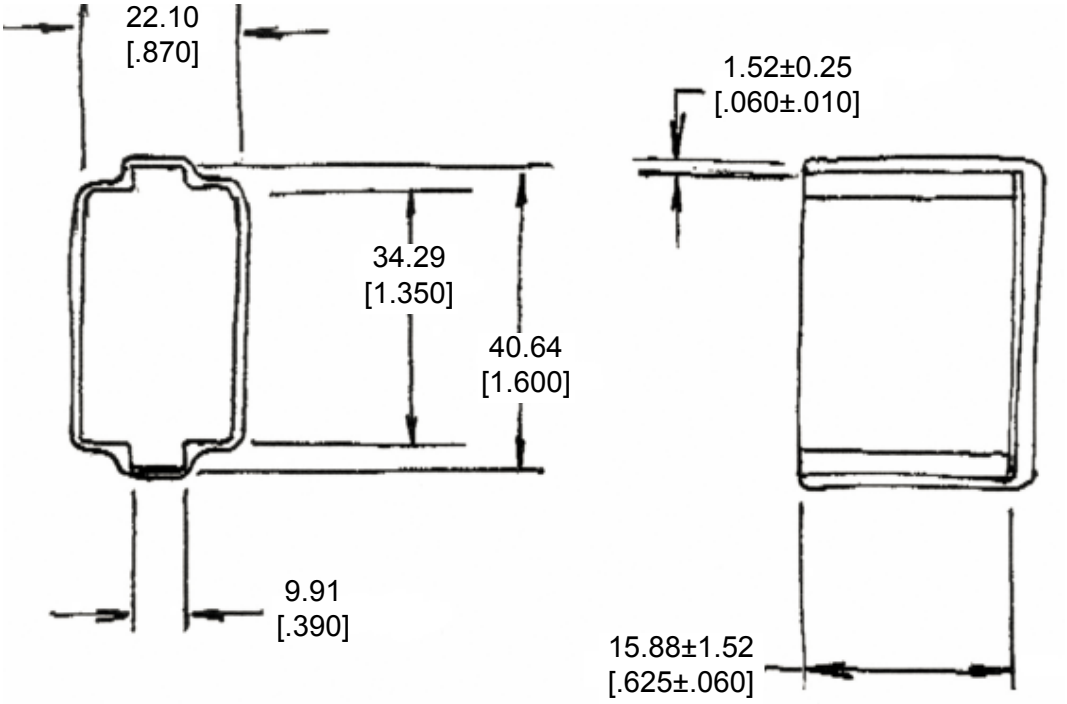

3. PART NO. DT12P-DC-BK

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON DT04-12PX (X=A,B,C,D KEYS) RECEPTACLES WITH ANY MODIFICATION.

THIS DRAWING IS UNPUBLISHED. © COPYRIGHT 2014 BY TE CONNECTIVITY ALL RIGHTS RESERVED.
RELEASED FOR PUBLICATION 2014

DIMENSIONS: MM [INCH]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ± 0.63 [.025]
3 PLC ±
4 PLC ±
ANGLES ±5°

DWN D. MEYER 27JN2014
CHK R. MESSENGER 27JUN2014
APVD D. MEYER 27JUN2014
PRODUCT SPEC
APPLICATION SPEC
WEIGHT 6.00 g

MATERIAL PVC
FINISH BLACK

TE Connectivity

NAME DUST CAP, RECEPTACLE, 12PIN
DT SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	4AFU8	C DT12P-DC-BK	-

Customer Drawing

SCALE NONE SHEET 1 OF 1 REV A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2310537-1 650075-000 RH73H2A40MKTN SBCHE154R7K SMW73R0JT 1393431-1 1903112-2
2-292161-3 2005330-1 3631B101LL 917696-1 CRGCQ2010J3K3 141991-2 1743455-2 3430B2F51RTDF
U5254-000005-030PA 1-794222-0 1969656-1 936348-1 CPF0402B37K4E1 2377783-2 2834055-1
TE50BR39J 1-962915-1 175977-2 2380312-2 3-1393225-0 MPT100C18RF SBCHE64R7K ROX05SJ18R