



ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

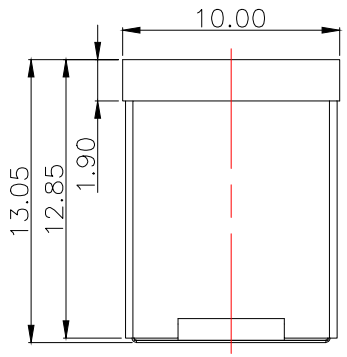


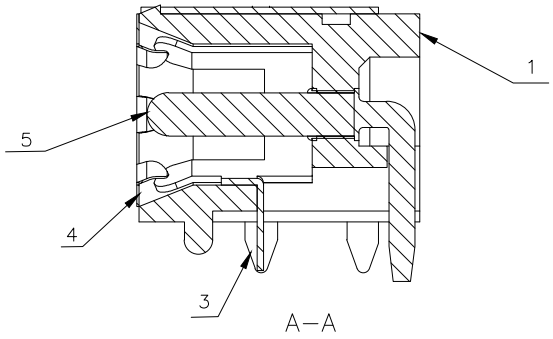

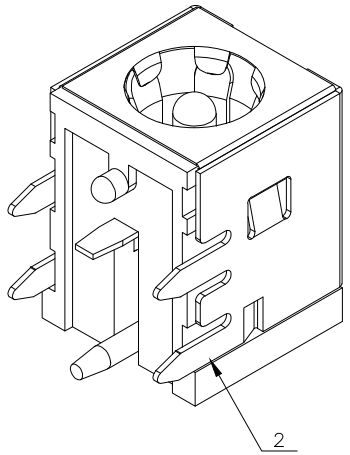

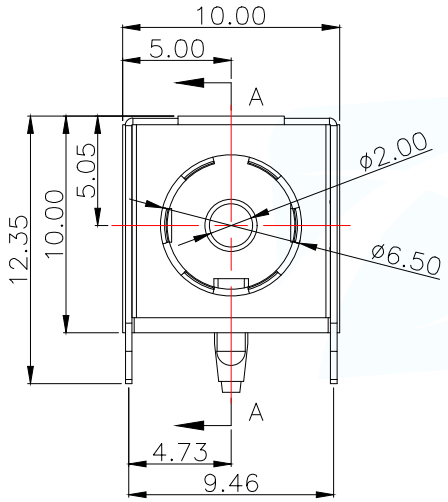


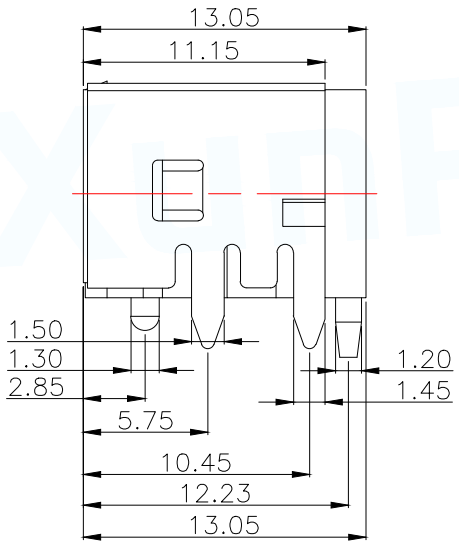

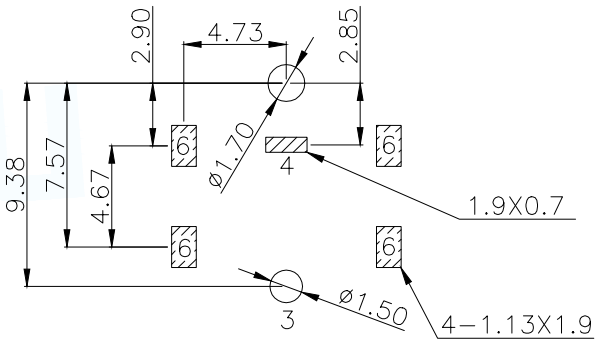


PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance	
Rated electrical load	DC 24V 8A
Contact resistance	≤0.03Ω
Insulation resistance	≥100MΩ DC250V
Pressure resistance	AC 500V 1min
Insertion force	3–30N
Operating temperature range	–40C°~+85C°
service life	5000cycles



RECOMMEND PULG



SCHEMATIC

序号	名称	数量	材料	备注
5	圆针	1	黄铜棒	镀银
4	盖片	1	H62黄铜带(Y)	镀银
3	簧片	1	磷铜带	铜锡
2	屏蔽罩	1	H62黄铜带(Y)	黑
1	基座	1	PPA	黑

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co,Ltd

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS:	ANGLES:
X.X±0.30	X.°±5°
X.XX±0.25	X.X°±1°
X.XXX±0.15	

CUSTOMER COPY

TITLE: DC SOCKET

PAR	DC–091–A200	
DWN		
CHKD		
APVD		
SCALE N:A	UNIT:MM	
SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

WAFER-PH2.0-6PWB WAFER-XH2.54-4PWZ-H62 RJ45-005-014-11 WAFER-GH1.25-6PLB DC-031A-A100
FPC-1.0HF-4PWAR-H20 MU-103-ARW64 WAFER-PH2.0-8PLB FPC-0.5AL-6PB FPC-0.5AX-30PWCR-H20
FPC-1.0AX-14PWCR-H25 TYPEC-304YDSW-ACP16 WAFER-PH2.0-2PJK FPC-0.5FX-16PWCR-H20
FPC-0.5FX-4PWBH15 WAFER-VH3.96-4PLB FPC-0.5AS-5PWCR-H20 FPC-0.5AX-24PWCR-H20
FPC-1.0AX-4PWCR-H25 WAFER-WBM4.2-16PJK-GB WAFER-PH2.0-3PWB FPC-0.5FX-14PWCR-H20
FPC-0.5FX-20PWBH15 FPC-0.5FX-4PWCR-H20 FPC-0.5HF-10PWBR-H20 HDMI-212L
WAFER-PH2.0-11PZZ PHB2.0-02-20PZZ SMA-KWE-323C-H13X23-LW WAFER-MX1.25B-8PWB