


ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

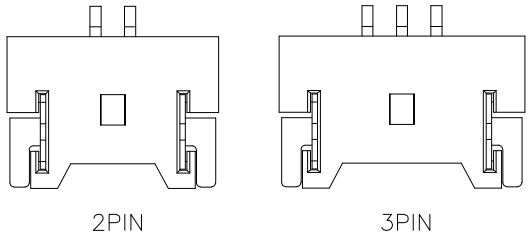


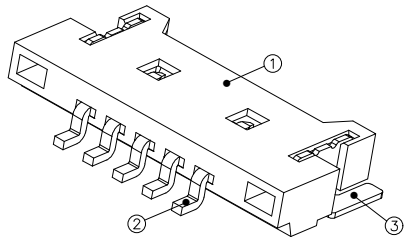


Part No	PIN	A	B	C
WAFER-MX1.25-2PCB	2	1.25	7.65	3.05
WAFER-MX1.25-3PCB	3	2.50	8.90	4.30
WAFER-MX1.25-4PCB	4	3.75	10.15	5.55
WAFER-MX1.25-5PCB	5	5.00	11.40	6.80
WAFER-MX1.25-6PCB	6	6.25	12.65	8.05
WAFER-MX1.25-7PCB	7	7.50	13.90	9.30
WAFER-MX1.25-8PCB	8	8.75	15.15	10.55
WAFER-MX1.25-9PCB	9	10.00	16.40	11.80
WAFER-MX1.25-10PCB	10	11.25	17.65	13.05
WAFER-MX1.25-11PCB	11	12.50	18.90	14.30
WAFER-MX1.25-12PCB	12	13.75	20.15	15.55
WAFER-MX1.25-13PCB	13	15.00	21.40	16.80
WAFER-MX1.25-14PCB	14	16.25	22.65	18.05
WAFER-MX1.25-15PCB	15	17.50	23.90	19.30
WAFER-MX1.25-16PCB	16	18.75	25.15	20.55

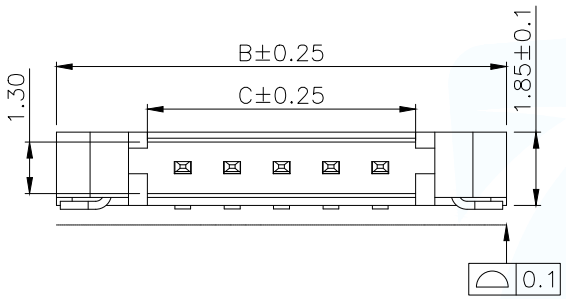



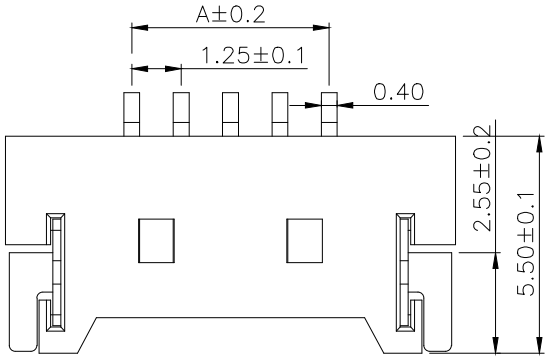

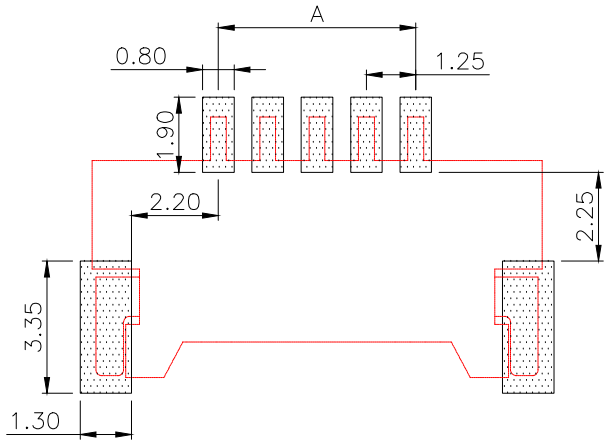

PCB LAYOUT

NOTES:

1.BASE: PA6T
2.PIN: Brass
3.Solder Tab: Brass

SPECIFICATIONS:

1.Spacing: 1.25
2.Voltage Rating: 125V AC DC
3.Current Rating: 1A AC DC
4.Insulation Resistance: 100MΩ Min
5.Contact Resistance: 20mΩ Max
6.Withstanding voltage: 500V AC 1/Minute
7.Temperatuer Range: -25℃ ~+ 85℃

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES			TITLE: WAFER 1.25 超薄		
DECIMALS:	ANGLES:		PAR	WAFER-MX1.25-NPCB	
X.:±0.2	X°.:±5°		DWN		
.X:±0.1	X.X°:±3°		CHKD		
.XX:±0.05	X.XX°:±1°	CUSTOMER COPY	APVD		
			SCALE1:1	UNIT:MM	
			SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5AX-24PWCR-H20 RJ45-005-014-11 WAFER-PH2.0-3PWB FPC-0.5FX-16PWCR-H20 FPC-0.5FX-20PWBH15 MU-103-ARW64 WAFER-GH1.25-6PLB WAFER-PH2.0-8PLB WAFER-XH2.54-4PWZ-H62 FPC-1.0AX-14PWCR-H25 FPC-1.0AX-4PWCR-H25 PHB2.0-02-20PZZ WAFER-PH2.0-11PZZ WAFER-WBM4.2-16PJK-GB FPC-0.5FX-14PWCR-H20 HDMI-212L TYPEC-304YDSW-ACP16 FPC-0.5HF-10PWBR-H20 WAFER-PH2.0-6PWB WAFER-VH3.96-4PLB DC-031A-A100 FPC-0.5FX-4PWBH15 FPC-0.5FX-4PWCR-H20 FPC-1.0HF-4PWAR-H20 SMA-KWE-323C-H13X23-LW WAFER-MX1.25B-8PWB WAFER-PH2.0-2PJK FPC-0.5AL-6PB FPC-0.5AS-5PWCR-H20 FPC-0.5AX-30PWCR-H20