
DESCRIPTION: M5 MALE - CABLE MOUNT - SOLDER CUP - 2 POSITION - SHIELDED

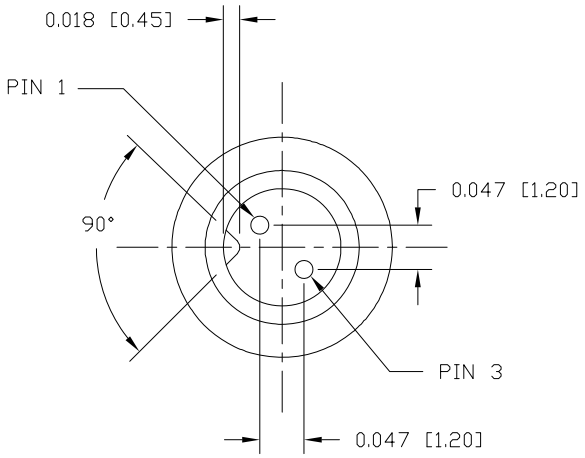



NOTE:

MATERIAL	
HOUSING:	TPU, BLACK
CONTACT:	BRASS
NUT:	BRASS
SHELL:	BRASS
FINISH	
CONTACT:	GOLD PLATED OVER 50µ" NICKEL
NUT:	NICKEL PLATED
SHELL:	BRIGHT TIN PLATED
ELECTRICAL	
RATED CURRENT:	1A
RATED VOLTAGE:	60V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.
WATER PROOF:	IP67
ENVIRONMENT	
OPERATION TEMPERATURE:	-40°C TO +85°C
WIRE GAUGE:	28 AWG MAX RECOMMENDED

850-002-103RLSY

1 = GOLD FLASH
4 = 10u" GOLD

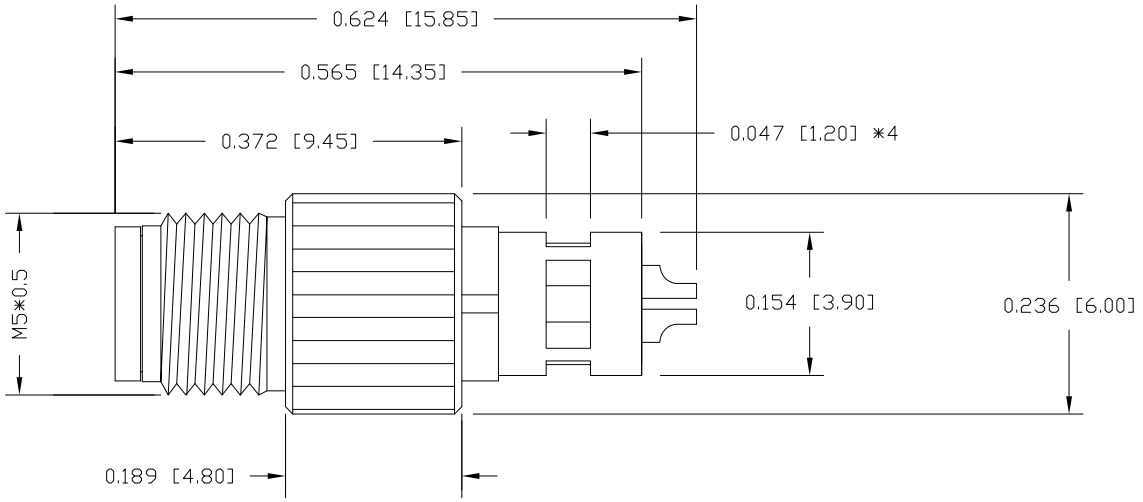

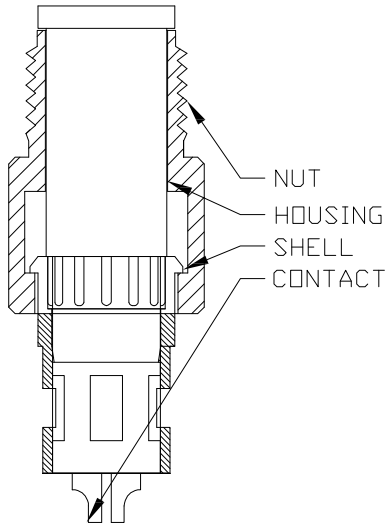

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	DATE:		SCALE:	SHEET	OF	REV
M. SIGMON	03-03-16	NorComp	NTS	1	1	6

DWG NO. 850-002-103RLSY

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

NorComp:

8P1P005210GRBR1 180-026-203L031 8P1P00217BGL521 CCA-015-M.5R152 CDFS17W2103L411 SFP67SS25 T58-D04-MMMR001 Y54-A04-MFFR001 HDF-R44-213L011 T54-B05-FFFR001 820B007-203RF01 858-R03-103RSS4 HDF-R15-113L461 SDF-R37-113L461 181-044-113R531 171-037-213R001 178-015-313R491 180-044-173L020 822B006-273L501 CCA-000-M03R215 SDF-V09-213L011 S58-A04-MMR001 172-025-113R021 852-002-113R004 8P1P01417BGL521 970-025-030R121 GCHDLPF15M15F SFP6715 680S3W3103L201 8P1P003200GRB01