



RoHS COMPLIANT

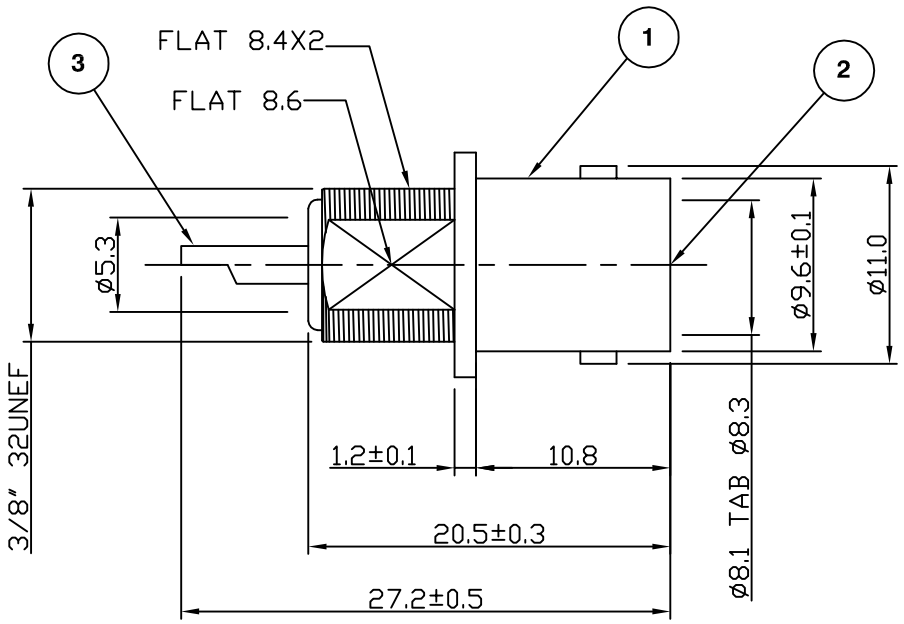



MOUNTING HOLE

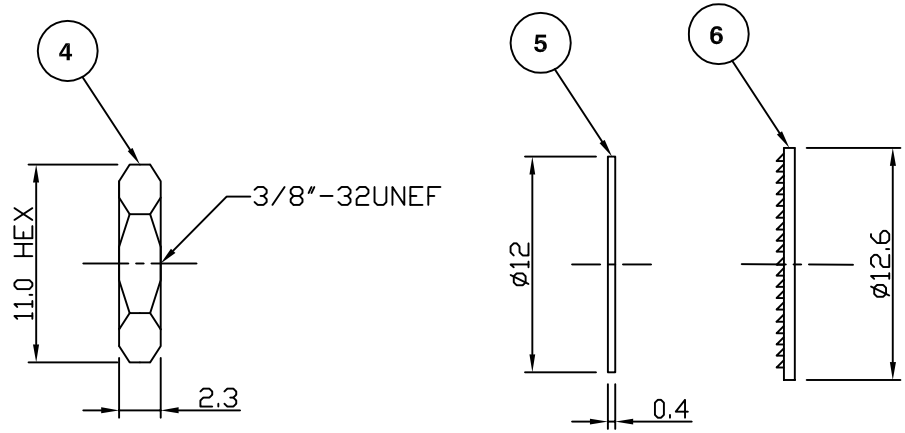

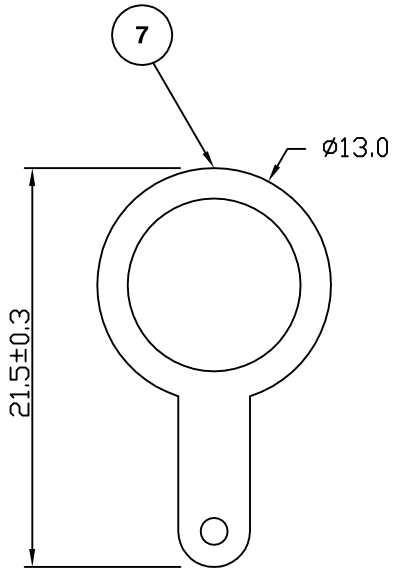

Electrical Characteristics

Nominal Impedance:	75 ohms
Frequency Range:	DC to 1 GHz
Insertion Loss:	0.2 dB at 1 GHz
Operating Voltage (rms):	500 V maximum at sea level
Dielectric Withstand Voltage (rms):	1500 V maximum at sea level
Contact Resistance:	1.5 milliohms maximum
Insulation Resistance:	5000 megohms minimum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Zinc, nickel plated
2	Dielectric	POM
3	Contact	Brass, gold plated
4	Nut	Brass, nickel plated
5	Washer	Brass, nickel plated
6	Washer	Iron, nickel plated
7	Solder Tag	Brass, Nickel plated

DESCRIPTION OF REVISION	APPVD	ISS	DATE
Updated with Item6-Washer	JT	4	26 April 10
Address & RoHS added	MS	3	11 Sep 09
CAD Issue	SN	2	01 Feb 02
First Issue	AT	1	16 Oct 94

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford,Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale	
DIMENSIONS: mm	
TOLERANCES: ± 0.2mm unless otherwise stated	
DRAWN BY:	S Nash
CHECKED BY:	S Nash
APPROVED BY:	M Nielsen
DATE:	01 Feb 02

TITLE:

BNC Panel Mount Jack

PART NUMBER:

VB1094-75

PAGE: 1 of 1

COPYRIGHT © 2002 VITELEC ELECTRONICS LIMITED

THIS DRAWING MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT OUR WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

147-0701-241 415-0043-MM250 C0909A18-11PN-106 21-14-M5.0 CJ70-7 CN1021A14G03P8-040 12-141 142-0403-011 415-0030-MM150 DEUH-9P 108-0913-001 40-98443N-C ATT-0263-04-SMA-02 111-0102-001 135-3402-001 415-0536-012 M24308/4-5F 145-0693-002 147-0701-832 M49142/03-0005 415-0028-048 8-141 CN0967C10A20P6-040 DD2466134 145-0701-821 30-9506-88 30-9516 40-9715HM 415-0203-024 131-3701-306