

DATASHEET
C1206X5R500-474KNE

GENERAL PURPOSE CERAMIC CAPACITORS (C SERIES)

1206, X5R, 50V, 0.47uF, ±10%, 100% matte Tin(Sn) over Nickel

VENKEL LTD.



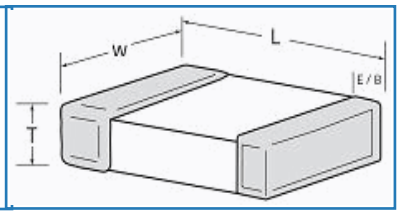

SIZE SPECIFICATIONS units: inches	
Length:	0.126
Width:	0.063
T(max):	0.072
Min E/B:	.020 ± .01
Size(EIA):	1206


COMPONENT SPECIFICATIONS	
Category:	Ceramic Capacitors
Series:	General Purpose (C Series)
Size:	1206
Dielectric:	X5R
Voltage:	50V
Capacitance:	0.47uF
Tolerance:	±10%
Termination:	100% matte Tin(Sn) over Nickel
Packaging:	E
Quantity per Reel:	2,000

DIELECTRIC SPECIFICATIONS	
Temperature Coefficient:	0 ±15%Δ˚C MAX
Temperature Voltage Coefficient	X5R not applicable
Ageing:	2.5% per decade hour, typical
Withstanding Voltage:	2.5 times VDCW
Operating Temp:	-55°C to +85°C
Dissipation Factor:	See C Series Datasheet

ENVIRONMENTAL INFORMATION	
RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level	MSL1


REFLOW PROFILE	
Max Reflow Temperature	260 °C
Number of Reflow Cycles	2
Time at Max Reflow Temp.	10 sec

REEL DIMENSIONS units: mm

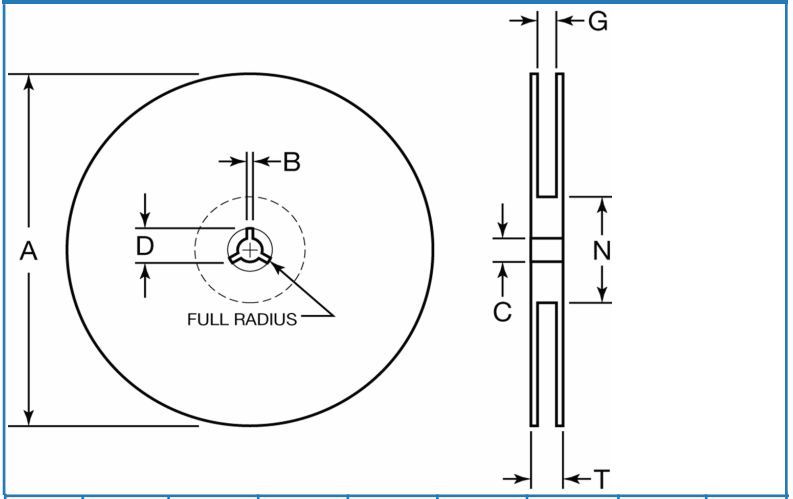

Tape	B min	C	A(7")	A(13")	D Min	N Min	G	T max
8mm	0.30	13 ± .05	178 ± 2.0	330 ± 2.0	20.20	50.00	10 ± 1.5	14.90

TAPING SPECIFICATIONS units: mm

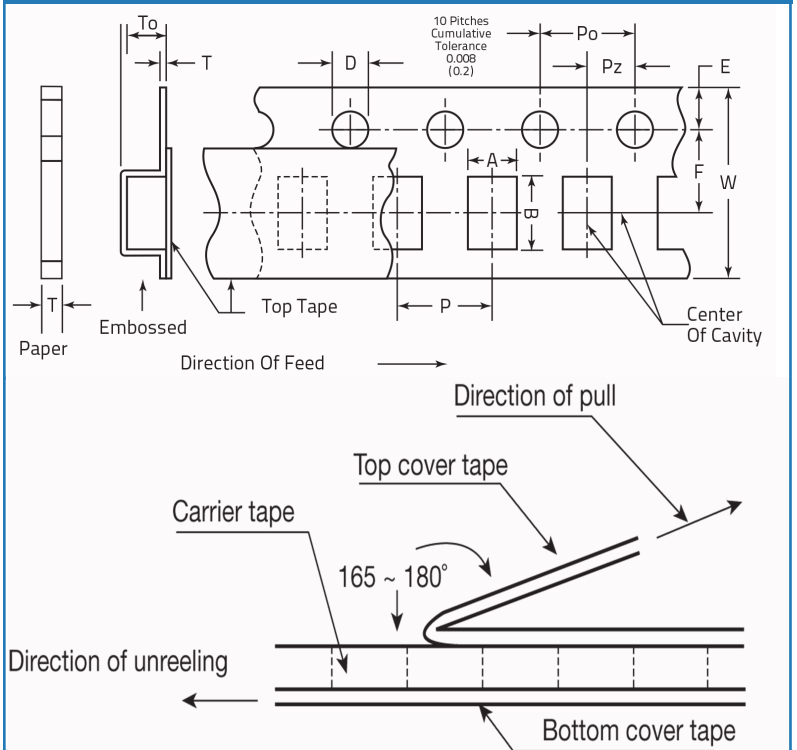

A	B	W	F	E	Po
2.0 ± 0.2	3.6 ± 0.2	8.0 ± 0.2	3.5 ± 0.1	1.75 ± 0.1	4.0 ± 0.1

Pz	D	T	P	To	T(E)
2.0 ± 0.05 - 0.0	1.5 + 0.1 - 0.0		4.0 ± 0.1	2.5 MAX	0.6 MAX

(800) 950-8365
www.venkel.com