




MAPX	MODIFICATION	DATE

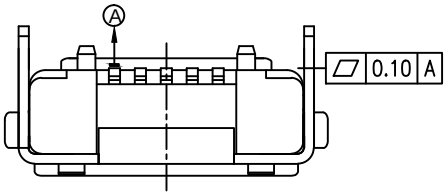





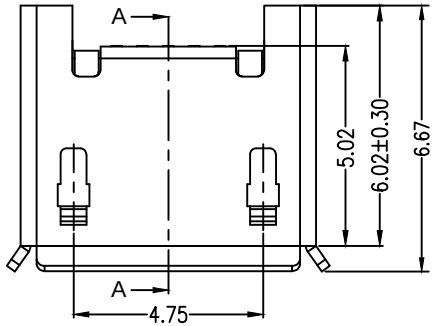

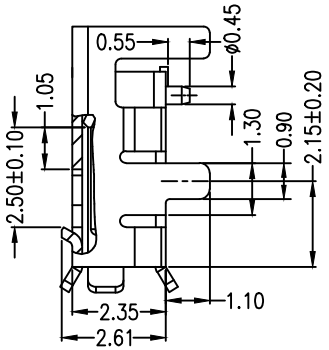

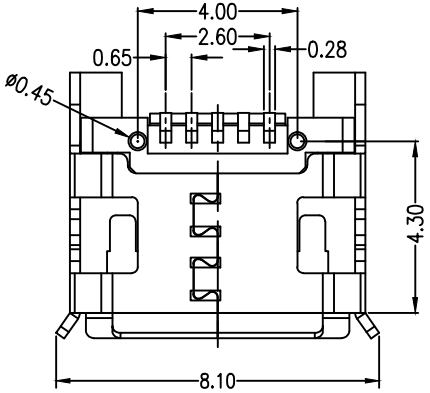

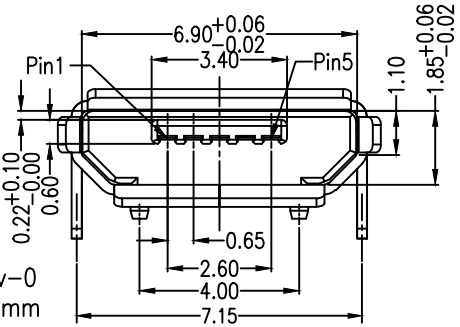

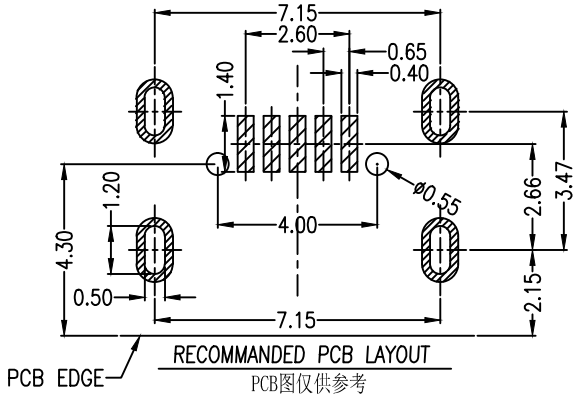

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: copper alloy,t=0.20mm

1.3 Shell: copper alloy,t=0.25mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kgf Max.

2.6 Total unmating force: 1.0 Kgf Min.

2.7 Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.35	X.	±5.°
.X	±0.30	.X	±2.°
.XX	±0.20	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Gavin	制图料号 PRODUCT PART NO.	920-A52A2021S10109
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	MICRO/5S-B 四脚DIP7.2有边脚长1.1有柱短端SMT
日期 DATE	2012-05-12	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

911-221A2021S10100 920-A62A2021S10104 906-752B1114D10200 910-151A2021D10100
912-312A1012D10100 920-154A2021Y10110 904-232A2031S10100 907-111A1022D10200
917-P81A202ES60201 918-318K2023C40005 920-C62A2021S10103 912-112A2021S10100
904-232B2032S10100 907-312A1101Y10210 918-415K3028S40000 918-418K2022Y40011
920-A64A2091S101A3 920-C52A2021S10105 904-331B2032S10200 905-761A2032S10200
906-552A1012D10200 912-112A1011D10100 906-262A1021D10200 908-351A1011D10100
917-B88C201AH70201 918-468K2029Y50000 919-162A1012D10400 920-A62A2021S10108
916-151A1022Y10200 920-F52A2021S10105