
Rocker Switch | **RA1-1A-DC-2-H**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

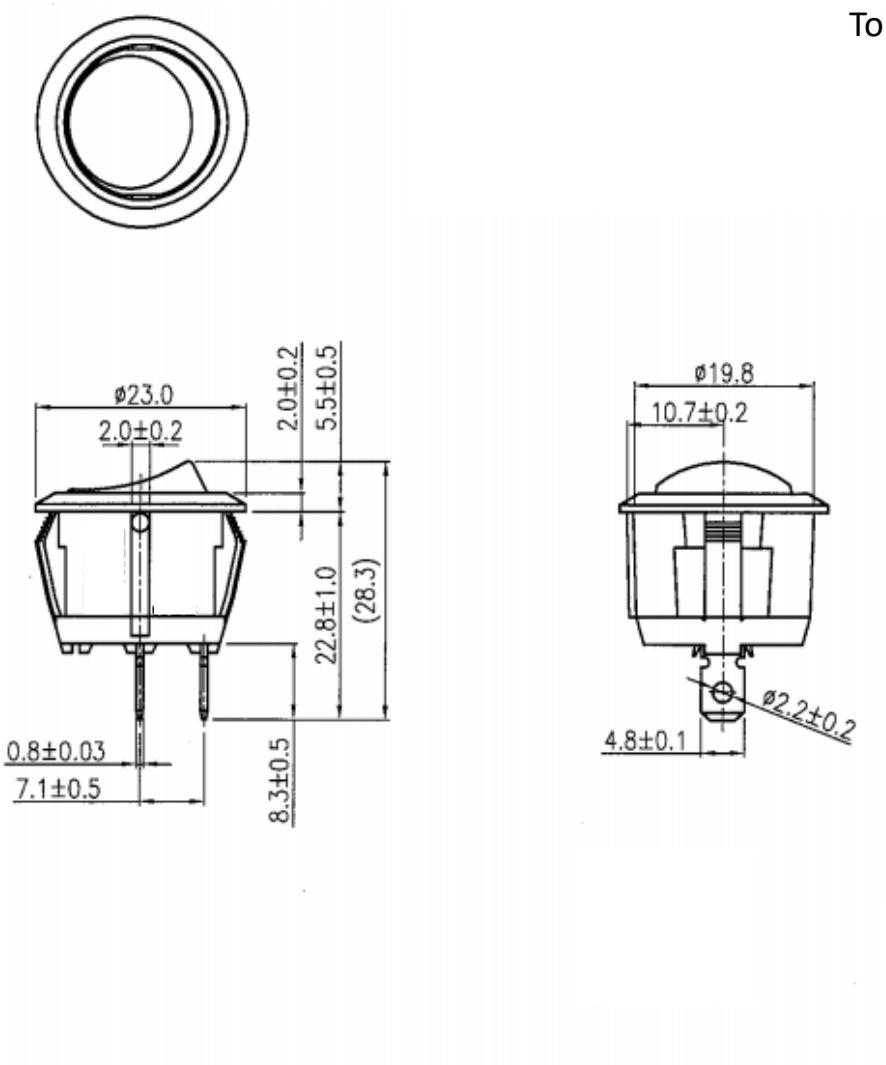


Mounting Hole

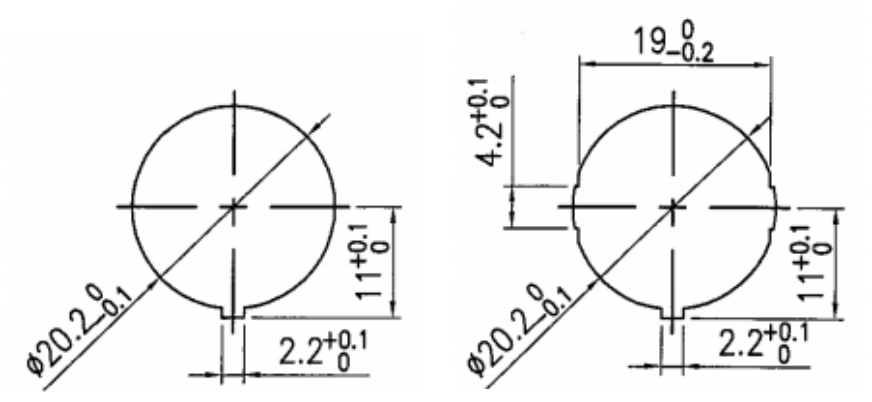

Thickness: 2.0~3.0 Thickness: 0.7~3.0

Circuit Diagram

2P SPST OFF-ON



Electrical Specifications

Rating	20A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Special White, Nylon 66 (94-V2)
Actuator	Special White, Nylon 66 (94-V2)
Terminals	Copper alloy, Silver plating

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

SC-B RD2-1A-DC-1-AL RG3-1A-DC-1-B SRB1-1G-DC-1-NN SRC1-1B-DC-1-B SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN SRD2-1G-DC-1-BNN TC6-P1-Z WR1 RC-1A-DC-1-AL SRD2-2F-DC-1-BNN TA1-1A-DC-4 TE1-1F-DC-1-PB TE6-1A-DC-1-UL SRD2-2F-DC-1-RNN TA2-1G-DC-6-O TB1-2H-DC-6 PB-1A-DC-2-B RF1-1A-DC-2-B-3 SRD1-2A-DC-1-BGN PB-1A-DC-2-RDL RA4-2A-DC-2-AL RF3-1A-DC-2-GL SB-1B-DC-3-B SB-1B-DC-3-R PB-1B-DC-2-RIL PD-1E-DC-9-UL TA2-1A-DC-5 TE3-1A-DC-1-AL