


SaleXun

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A0		INITIAL RELEASE		

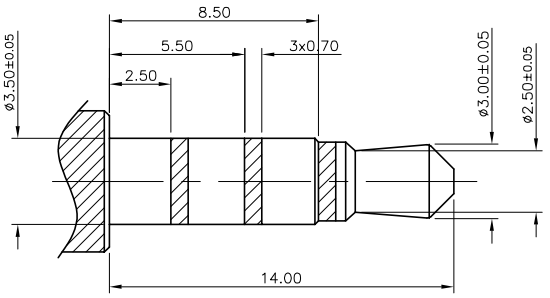



(ø3.50mm 3 OR 4 POLE PLUG DETAIL DRAWING)

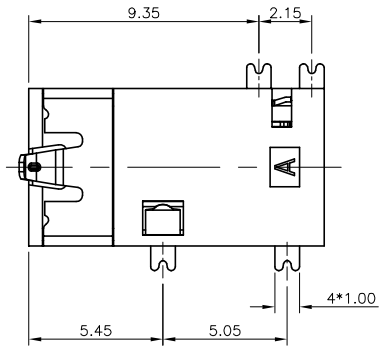


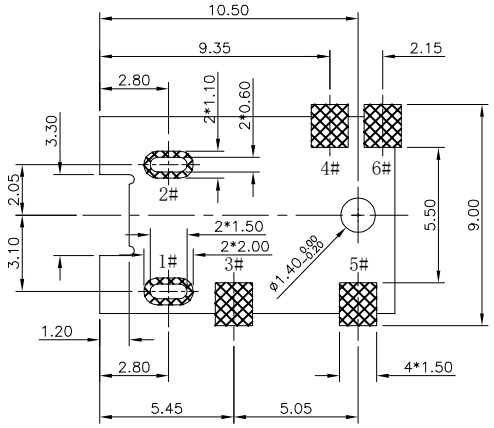


RECOMMENDED P.C.B LAYOUT
TOP VIEW

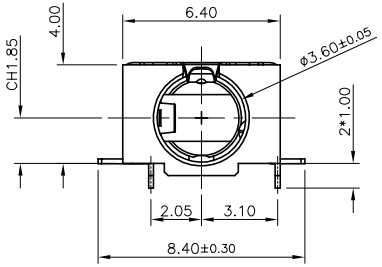

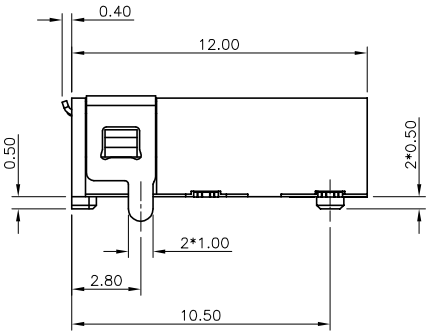







It is recommended to use the 4;6# feet for the detection PIN. This is the best choice.

SCHEMATIC

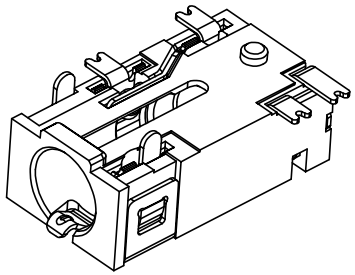

3D VIEW

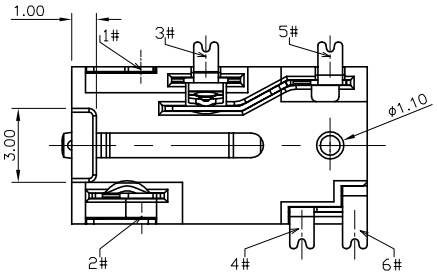

NOTES:
1. CONTACT CURRENT RATING:1A;
2. CONTACT RESISTANCE:50mΩ MAX;
3. INSULATION RESISTANCE:100MΩ MIN;
4. DIELECTRIC WITHSTANDING:500V AC MIN;
5. DURABILITY:5000CYCLES MIN;
6. CONNECTOR MATING FORCES:2.94~29.4N(0.3~3.0kgf);
7. CONNECTOR UNMATING FORCES:2.94~29.4N(0.3~3.0kgf);
8. BE MAINTAINED FOR 10 SECONDS AT 260±5°C;
9. SOLDERING PROCESS: REFLOW SOLDERING.

ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION
07	CONTACT F	1 PCS	C2680R-EH, T=0.20	Au Plated
06	CONTACT E	1 PCS	C2680R-EH, T=0.20	Au Plated
05	CONTACT D	1 PCS	C5210R-EH, T=0.20	Au Plated
04	CONTACT C	1 PCS	C5210R-EH, T=0.20	Au Plated
03	CONTACT B	1 PCS	C5191R-H, T=0.20	Au Plated
02	CONTACT A	1 PCS	C5191R-H, T=0.20	Au Plated
01	HOUSING	1 PCS	PA10 Halogen-free fuel additive	BLACK

This document is the property of SaleXun development corporation.

Unless Otherwise specified, Tolerance:
X. ±0.35
X.x ±0.25
X.xx ±0.20
X.xxx ±0.10
ANGLES ±3°
Tel:0769-82889209

Dongguan SaleXun Electronic Co.,Ltd.

DESIGN:	DATE:	TITLE: ø3.5 FOUR-POLE HEADLESS FRONT-POST REAR-INSERTION; NORMALLY CLOSED HEADPHONE JACK		
CHECKED:	DATE:			
APPROVED:	DATE:			
PART NO.: PJK-057S-6P-05		REV.: A0	SCALE: 1:1	UNIT: mm
DRAWING NO.: C-PJK-057S-6P-00		SIZE: A4	SHEET: 1/1	

SaleXun