


図面番号(DRAWING NO.)
SJ119766


版数 VER.	年月日 D A T E	CN NO.	変更内容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承 認 APPD.
2	07/SEP/2018	026499	PRESCRIPTIVE RECONSIDERATION		T.KUROSAWA	H.OOTANI	M.KIKUCHI


WISDOM承認 2018/09/10

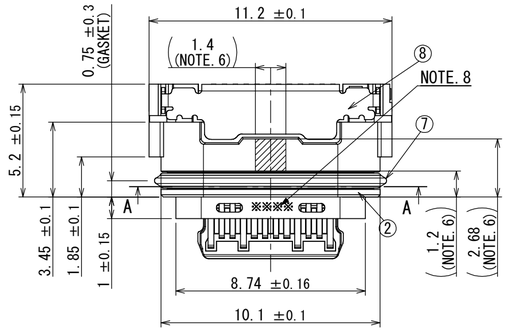





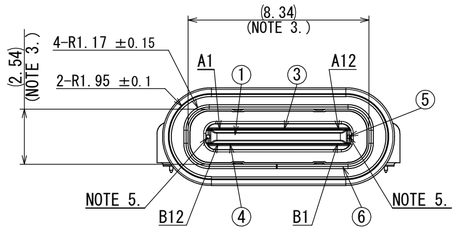


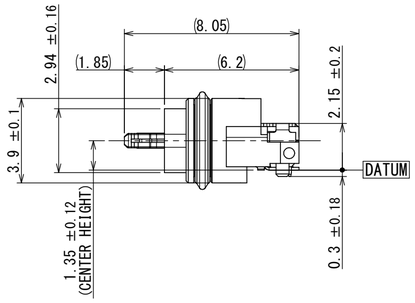





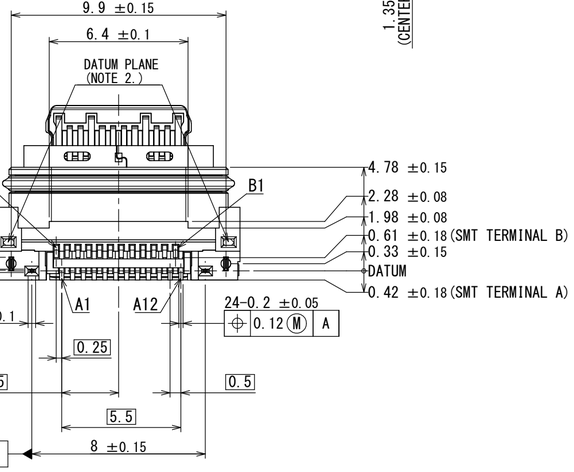


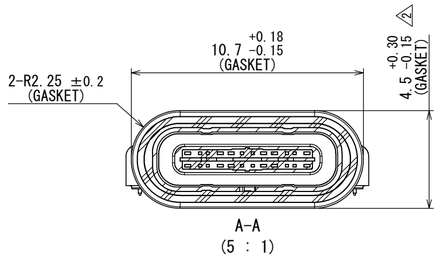


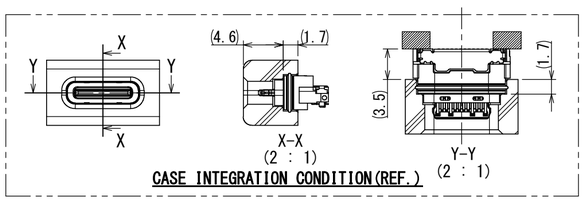

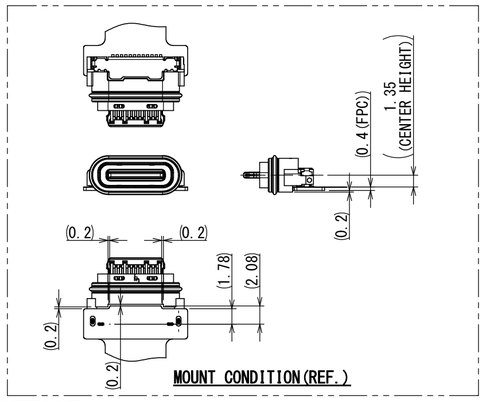

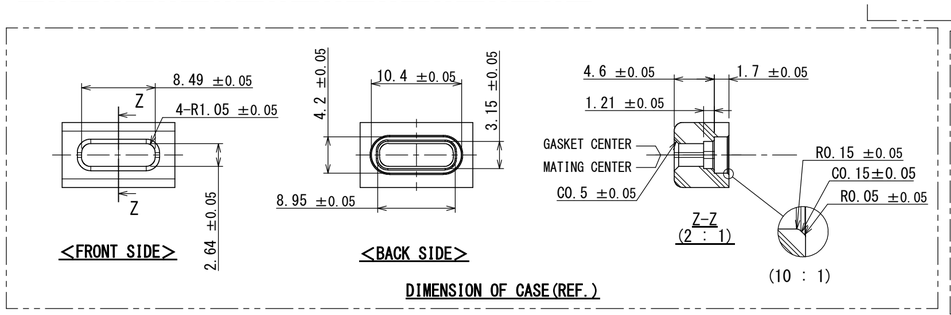

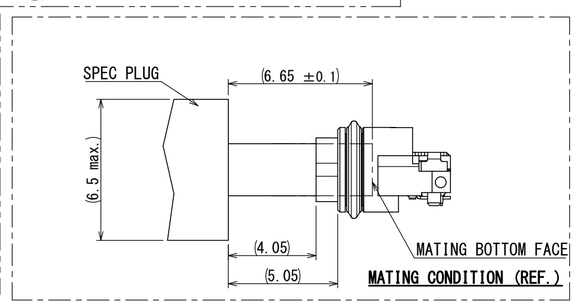

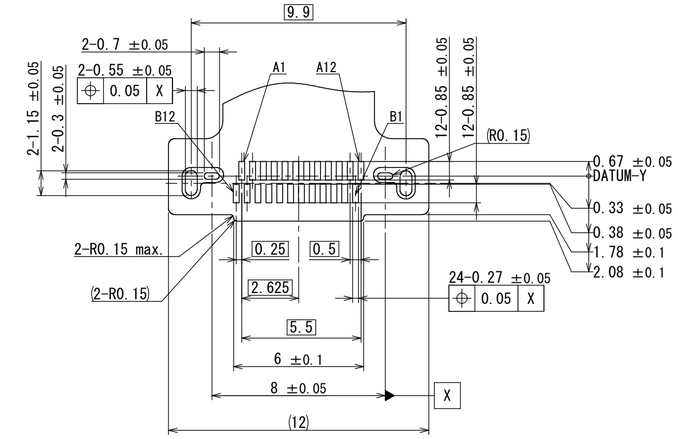

APPLICABLE P.C.B. DIMENSION (REF.)
SURFACE VIEW FROM CONNECTOR MOUNTING SIDE.

NOTE 1. COPLANARITY OF SMT TERMINAL BE 0.1 MAXIUM.
NOTE 2. THIS FACE IS DATUM PLANE.
NOTE 3. MATING DIMENSIONS CONSIST OF
"Universal Serial Bus Type-C Cable and Connector Specification Revision 1.2"
NOTE 4. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.
AS SUCH IT CANNOT INDEPENDENTLY BE GURANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.
THE SYSTEM IMPLEMENTER IS RESPONSIBLE FOR ACHIEVING PRODUCT RELIABILITY AND PASSING USB COMPLIANCE TESTING.
REFERENCE THE USB TYPE C SPECIFICATION RELEASE 1.2, SECTION 3.2.1, NOTE 7.
NOTE 5. METAL EXPOSED AREA SIZE COULD BE SLIGHTLY CHANGED BASED ON MOLDING PROCESS CONDITION IN EACH LOT,
HOWEVER THIS WOULD NOT AFFECT CONNECTOR FUNCTION.
NOTE 6. VACUUM AREA.
NOTE 7. PIN ASSIGNMENT (FRONT VIEW)

Pin No.	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
	GND	TX1+	TX1−	V_{BUS}	CC1	D+	D−	SBU1	V_{BUS}	RX2−	RX2+	GND
	GND	RX1+	RX1−	V_{BUS}	SBU2	D−	D+	CC2	V_{BUS}	TX2−	TX2+	GND
Pin No.	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

NOTE 8. LOT NO. IS MARKED AS SHOWN IN BELOW TABLE.

YEAR(1 DIGIT)		MONTH(1 DIGIT)		DAY(1 DIGIT)								LINE(1 DIGIT)	
YEAR	MARKING	MONTH	MARKING	DAY	MARKING	DAY	MARKING	DAY	MARKING	DAY	MARKING	LINE	MARKING
2018	8	1	1	1	1	11	B	21	M	31	Y	Manual	0
2019	9	2	2	2	2	12	C	22	N			1	1
2020	0			3	3	13	D	23	P			2	2
2021	1	*	*	4	4	14	E	24	Q				
2022	2	*	*	5	5	15	F	25	R				
2023	3	*	*	6	6	16	G	26	S			*	*
2024	4	9	9	7	7	17	H	27	T			*	*
2025	5	10	A	8	8	18	J	28	U			*	*
2026	6	11	B	9	9	19	K	29	V				
2027	7	12	C	10	A	20	L	30	X				

NOTE 9. THE P.C.B. LAYOUT IS ONLY FOR REFERENCE.
ACTUAL PCB DESIGN (INCLUDING DIMENSION AND TOLERANCE) IS SUPPOSED TO BE INVESTIGATED BY DEVICE MANUFACTURER.

符号 No.	名 称 DESCRIPTION	個数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
8	REAR SHIELD	1	STAINLESS STEEL	NICKEL PLATING	−
7	GASKET	1	SILICONE RUBBER	−	COLOR:RED
6	SHELL	1	STAINLESS STEEL	−	−
5	MID PLATE	1	STAINLESS STEEL	NICKEL PLATING	−
4	CONTACT B	12	COPPER ALLOY	CONTACT AREA: GOLD OVER NICKEL SOLDER TAILS: GOLD FLASH OVER NICKEL	CONTACT AREA: NICKEL:1μm MIN GOLD :0.1μm MIN
3	CONTACT A	12			
2	SUB ASSEMBLY INSERT MOLD	1	HEAT RESISTING PLASTIC	−	COLOR:BLACK
1	MID PLATE INSERT MOLD	1	HEAT RESISTING PLASTIC	−	COLOR:BLACK

仕様書(SPECIFICATION) JACS-30398 JAHL-30398	第1版(ORIGINAL DATE) 25/MAY/2018	尺度(SCALE) 5:1	シリーズ(SERIES) DX07
一般公差(GENERAL TOLERANCE) 寸法(DIMENSION) .　±0.8 .×　±0.4 .××　±0.1 .×××± 角度(ANGLES) ×°　± ×°×'　± 単位(UNIT) : mm	製図 DR.	名称(TITLE) DX07W024JA2	日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
	担当 CHK. T.KUROSAWA		
	査閲 APPD. H.OOTANI		
	承認 APPD. M.KIKUCHI		
	質量(MASS)	図面番号(DRAWING NO.) SJ119766	SIZE A2 / 版数(VER.) 2

JAE-CONNECTOR.COM Reference Only

JAE Connector DIV. Proprietary.Copyright(C) 2018, Japan Aviation Electronics Industry, LTD.

DCF-C-213H(12.08)
S/W

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Japan Aviation Electronics:

MX23A26SF1 MX34040SF1 MX80S08K4F1 CE2S111C01 FI-W15S MX23A26NF1 TX25A-80P-LT-H1E FF0881SA1-R3000 MM60-52B1-G1-R850 MX44006XR1 DX07B024JJ2R1500 MX19002P52 MX23A34XF1 MX34032SF4 725411-2MAC FI-W31S MX23A18SF1 MX34012NF1 MX34012SF1 MX44000XP2 MX77A020HF1 FI-RE31HL MX34016SF1 MX34016SFA MX80A04SZ1A MX84B020NF1 FI-SE20MRE HD1P040MA1R6000 FI-RE41S-HF-R1500 IL-AG9-2S-S3C1