



ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

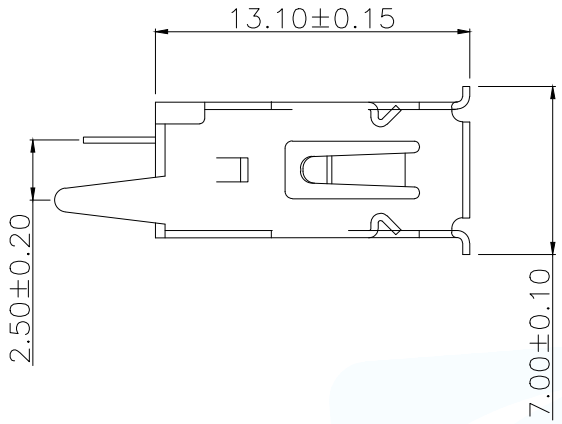

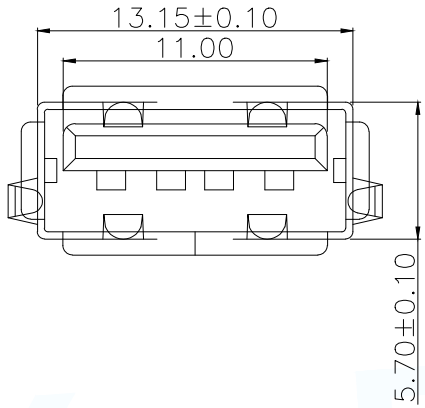

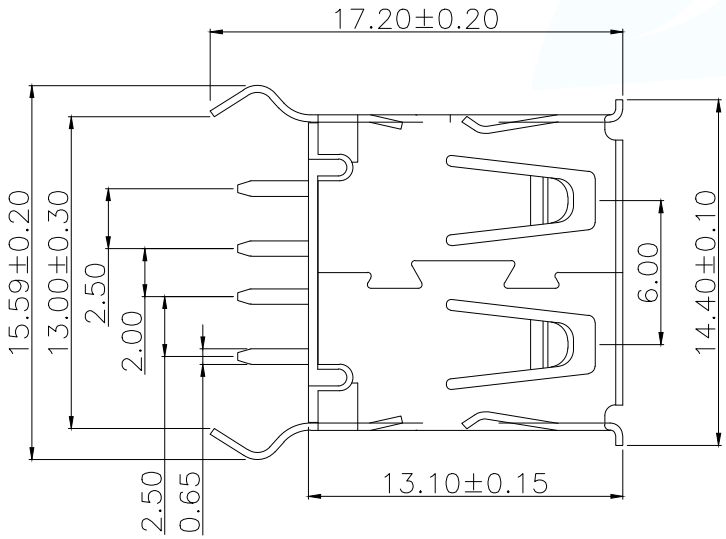

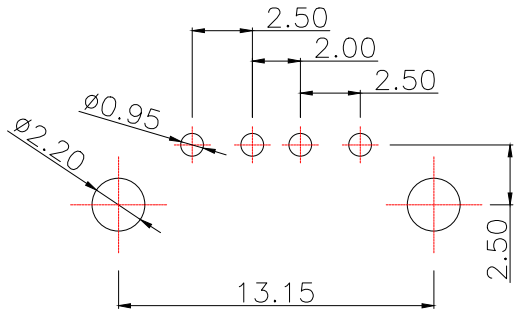

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Specifications:
Electrical:
1.Current Rating
1.5A/contact terminal
2.Voltage Rating
30V DC
3.Contact Resistance
30 milliohms MAX
4.Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
5.Lnsulation Resistance:
1000MEGA ohms MIN
Mechanical:
1.Cnnector Mate and Unmate ForceMate
Mate force:3.75kgf (MAX)
Unmate force:1.02kgf (MIN)
2.Terminal Retenion1.2kgf (MIN)
Matorial:
1.Housing:Hing Temperature Tnermaplastics,UL 94V-0 PBT/LCP White/Black
2.Contact:Copper Alloy C2680
3.Shell: Copper Alloy C2680/SPCC
Finish:
1.Contact: Piated Gold in Mating Area;Tin On Solder Talls
2.Shell:
Nickel Plating

Pin Definition		
PIN	Signal Name	Describe
1	VBUS	+5V
2	D-	Neagative Data Channel
3	D+	Positive Data Channel
4	GND	Ground

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES			TITLE: USB-AF-180°弯脚13.0		
			PAR	USB-255-BRYH130	
DECIMALS:	ANGLES:		DWN		
X.X±0.30	X.°±5°		CHKD		
X.XX±0.25	X.X°±1°		APVD		
X.XXX±0.15		CUSTOMER COPY	SCALE N:A	UNIT:MM	
			SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5FX-14PWCR-H20 SMA-KWE-323C-H13X23-LW TYPEC-304YDSW-ACP16 WAFER-VH3.96-4PLB FPC-0.5AS-5PWCR-H20 FPC-1.0AX-4PWCR-H25 WAFER-PH2.0-8PLB FPC-0.5FX-16PWCR-H20 FPC-0.5FX-20PWBH15 FPC-0.5FX-4PWCR-H20 FPC-1.0AX-14PWCR-H25 DC-031A-A100 WAFER-PH2.0-2PJK FPC-0.5AL-6PB FPC-0.5HF-10PWBR-H20 WAFER-PH2.0-11PZZ WAFER-PH2.0-6PWB WAFER-WBM4.2-16PJK-GB FPC-1.0HF-4PWAR-H20 WAFER-MX1.25B-8PWB WAFER-XH2.54-4PWZ-H62 FPC-0.5FX-4PWBH15 MU-103-ARW64 PHB2.0-02-20PZZ RJ45-005-014-11 WAFER-PH2.0-3PWB FPC-0.5AX-24PWCR-H20 FPC-0.5AX-30PWCR-H20 HDMI-212L WAFER-GH1.25-6PLB