
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

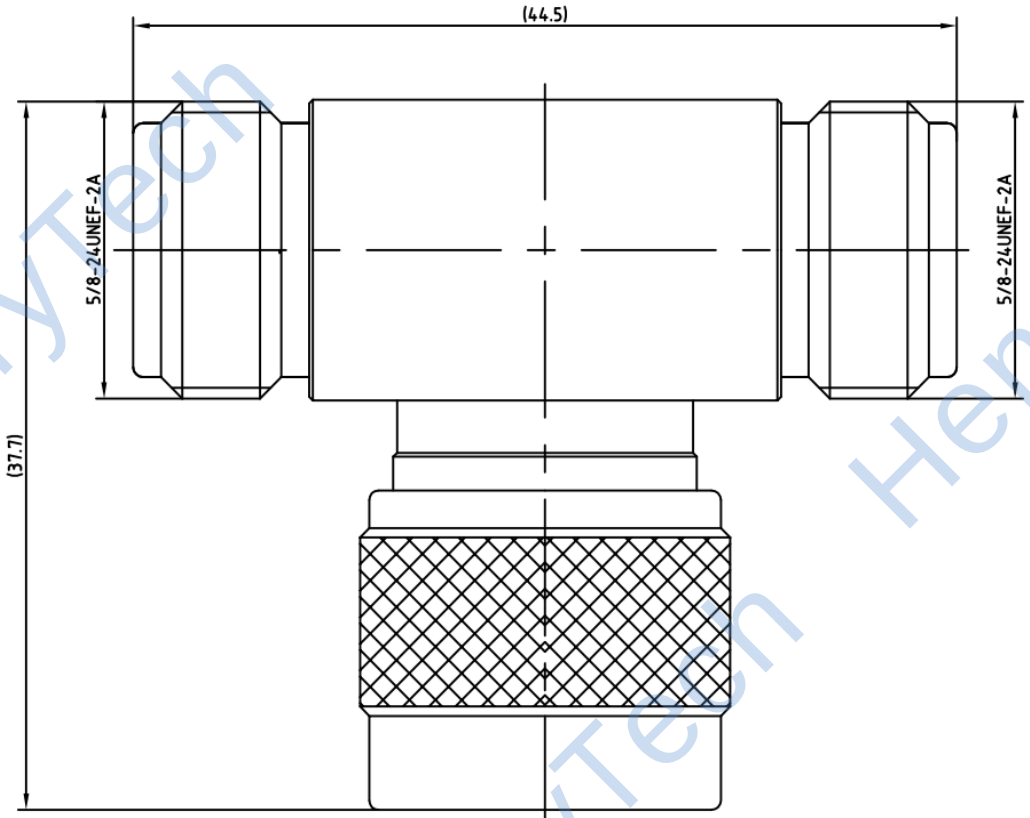

1 Electrical

1.1 Impedance: 50Ω

1.2 Frequency: 0-6GHz

1.3 Insulation resistance: ≥5000MΩ

1.4 Dielectric strength: 1500V

1.5 Contact resistance

Center contact ≤ 1MΩ

Outer contact ≤ 0.2MΩ

2 Material&Finish

2.1 Inner Contact: Phosphor bronze, gold plated

2. Outer Contact: Brass, Nickel plated

3. Insulators: PTFE

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: HL-N-KJK N Male to Female to Female Adaptor	HenryTech	
ENGINEER: L. yu 19/03/17		DIMENSION IN MILLIMETERS (mm)	
APPROVED: W. yi 19/03/17			
TOLERANCES UNLESS OTHERWISE SPEFICIED: X ±0.50, .X ±0.20, .XX ±0.10, ANGLES ±1°	PART NO: HL-N-KJK	SIZE: A4 / SCALE: N/A / SHEET: 1/1 / REV: A	

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HT-LFCN-3800+ HL-SMA/SMB-KK HL-SMB-K3DY H3-MABA-007871-CT1A40 H3-MABA-010551-CF1071 H3-TC1-1TG2+ HT-BFHKI-1572+ HX-SMA/SMP-JK HL-SMA-KHD4 HN-DC2016-0.5(12-4.6)M H3-MABA-011085 HT-LFCG-530+ HL-SSMA-KHD-1 HN-LP7-0.5-1.27(9.4-2.8) HT-QCN-19+ HL-N-KKC HL-SMAMF-2-18-15dB H2SYDC-20-62HP+ HG-SCN-2-22+ HL-MCX-KE-02 HT-HFCN-2700+ HT-HFCN-3800+ HT-LFCG-1700+ HT-LFCN-400+ HG-SCN-2-65+ HLCC2250G HT-SCA-4-10+ HX-N-JK H3-MAPD-008109-C30040 HX-1.85-JJ