
Metal Film Resistors
Military, MIL-R-10509 Qualified, Type RN
Military, MIL-PRF-22684 Qualified, Type RL

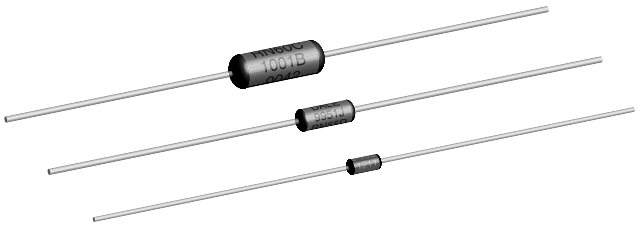

FEATURES

- Very low noise
- Very low voltage coefficient
- Controlled temperature coefficient
- Excellent high frequency characteristics
- Flame retardant epoxy coating
- Commercial alternatives to military styles are available with higher power ratings. See appropriate catalog or web page

STANDARD ELECTRICAL SPECIFICATIONS

MIL STYLE	VISHAY DALE MODEL	MAXIMUM WORKING VOLTAGE	VISHAY DALE® MILITARY APPROVED VALUE RANGE (Ω)				DIELECTRIC STRENGTH VAC
			MIL-R-10509				
			CHARACTERISTIC D	CHARACTERISTIC C	CHARACTERISTIC E	MIL-PRF-22684	
RN50	CMF50	200	—	10R - 100k	10R - 100k	—	450
RN55	CMF55	200	10R - 301k	49R9 - 100k	49R9 - 100k	—	450
RN60	CMF60	300	10R - 1M	49R9 - 499k	49R9 - 499k	—	500
RN65	CMF65	350	10R - 2M	49R9 - 1M	49R9 - 1M	—	900
RN70	CMF70	500	10R - 2.49M	24R9 - 1M	24R9 - 1M	—	900
RL07	CMF07	250	—	—	—	51R - 150k	450
RL20	CMF20	350	—	—	—	4R3 - 470k	700

Vishay Dale commercial value range: Extended resistance ranges are available in commercial equivalent types. Please contact us by using the email at the bottom of this page.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	CONDITION
Voltage Coefficient	ppm/V	5 when measured between 10% and full rated voltage
Insulation Resistance	Ω	≥ 10^{10} minimum dry; ≥ 10^{8} minimum after moisture test
Operating Temperature Range	°C	- 65 / + 175 (See derating curves for military range)
Terminal Strength	lb	5 pound pull test for RL07/RL20; 2 pound pull test for all others
Solderability		Continuous satisfactory coverage when tested in accordance with MIL-R-10509 and MIL-PRF-22684

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: RN60D3483FR36 (preferred part numbering format)

R	N	6	0	D	3	4	8	3	F	R	3	6	

MIL STYLE	CHARACTERISTIC	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING	SPECIAL
RN50 **RN55** **RN60** **RN65** **RN70**	**E** = 25ppm **C** = 50ppm **D** = 100ppm	3 digit significant figure, followed by a multiplier **10R0** = 10Ω **2152** = 21.5KΩ **2494** = 2.49MΩ	**B** = ± 0.1% **C** = ± 0.25% **D** = ± 0.5% **F** = ± 1%	**B14** = Tin/Lead, Bulk **R36** = Tin/Lead, T/R (Full) **RE6** = Tin/Lead, T/R (1000 pcs)	Blank = Standard (Dash Number) (up to 1 digit)

Historical Part Number example: RN60D3483F (will continue to be accepted)

RN60	D	3483	F	R36
MIL STYLE	CHARACTERISTIC	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING

New Global Part Numbering: RL07S471JR36 (preferred part numbering format)

R	L	0	7	S	4	7	1	J	R	3	6

MIL STYLE	LEAD MATERIAL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING
RL07 **RL20**	**S** = Solderable	2 digit significant figure, followed by a multiplier **4R3** = 4.3Ω **202** = 2.0KΩ **474** = 470KΩ	**G** = ± 2% **J** = ± 5%	**B14** = Tin/Lead, Bulk **R36** = Tin/Lead, T/R (Full) **RE6** = Tin/Lead, T/R (1000 pcs)

Historical Part Number example: RL07S471J (will continue to be accepted)

RL07	S	471	J	R36
MIL STYLE	LEAD MATERIAL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING

MATERIAL SPECIFICATIONS

Element:	Nickel-chrome alloy
Coating:	Flame retardant epoxy, formulated for superior moisture protection
Core:	Fire-cleaned high purity ceramic
Termination:	Standard lead material is solder-coated copper. Solderable and weldable.

ENVIRONMENTAL SPECIFICATIONS


General:	Environmental performance is shown in the Environmental Performance table. Test methods are those specified in MIL-R-10509 and MIL-PRF-22684.
Shelf Life:	Resistance shifts due to storage at room temperature are negligible.

APPLICABLE MIL-SPECS

MIL-R-10509 and MIL-PRF-22684: The CMF models meet or exceed the electrical, environmental and dimensional requirements of MIL-R-10509 and MIL-PRF-22684.


Noise: Vishay Dale metal film resistors have exceptionally low noise level. Average for standard resistance range is 0.10 micro-volt per volt over a decade of frequency, with low and intermediate resistance values typically below 0.05 micro-volt per volt.

Vishay Dale CMF resistors have an operating temperature range of - 65°C to +175°C. They must be derated according to the following curves:

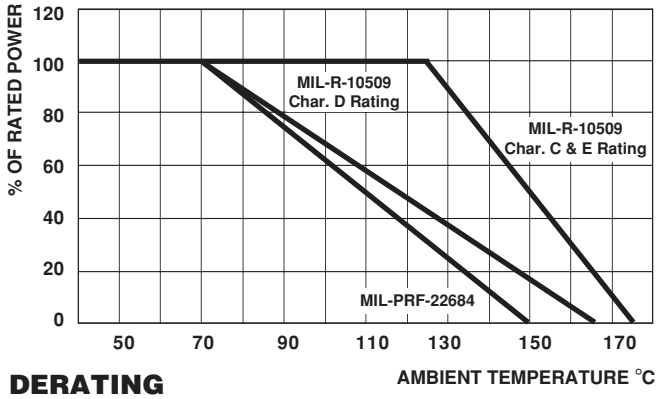

DERATING

DIMENSIONS in inches [millimeters]

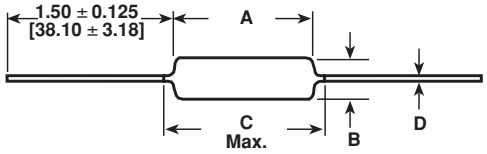


VISHAY DALE MODEL	A	B	C (Max.)	D
CMF50	0.150 ± 0.020 [3.81 ± 0.51]	0.065 ± 0.015 [1.65 ± 0.38]	0.244 [6.20]	0.016 ± 0.002 [0.41 ± 0.05]
CMF55	0.240 ± 0.020 [6.10 ± 0.51]	0.090 ± 0.008 [2.29 ± 0.20]	0.278 [7.06]*	0.025 ± 0.002 [0.64 ± 0.05]
CMF60	0.344 ± 0.031 [8.74 ± 0.79]	0.145 ± 0.015 [3.68 ± 0.38]	0.425 [10.80]	0.025 ± 0.002 [0.64 ± 0.05]
CMF65	0.562 ± 0.031 [14.27 ± 0.79]	0.180 ± 0.015 [4.57 ± 0.38]	0.687 [17.45]	0.025 ± 0.002 [0.64 ± 0.05]
CMF70	0.562 ± 0.031 [14.27 ± 0.79]	0.180 ± 0.015 [4.57 ± 0.38]	0.687 [17.45]	0.032 ± 0.002 [0.81 ± 0.05]
CMF07	0.240 ± 0.020 [6.10 ± 0.51]	0.090 ± 0.008 [2.29 ± 0.20]	0.278 [7.06]	0.025 ± 0.002 [0.64 ± 0.05]
CMF20	0.375 ± 0.040 [9.53 ± 1.02]	0.145 ± 0.015 [3.68 ± 0.38]	0.425 [10.80]	0.032 ± 0.002 [0.81 ± 0.05]

* .290" [7.37mm] for ± 0.25% and ± 0.1% resistance tolerances.

MILITARY POWER RATING

WATTAGE	MILITARY QUALIFIED		
	MIL-R-10509		MIL-PRF-22684
	AT + 70°C (D)	AT + 125°C (C & E)	AT + 70°C
0.05	—	RN50	—
0.10	—	RN55	—
0.125	RN55	RN60	—
0.25	RN60	RN65	RL07
0.50	RN65	RN70	RL20
1.0	RN70	—	—

Note: Commercial equivalents of military styles are available with higher power ratings. Consult factory.

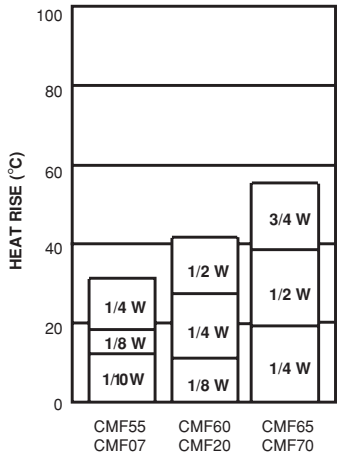

HEAT RISE

The increase in resistor surface temperature due to rated load is shown in the chart above. Resistor temperature = heat rise + ambient temperature.

MARKING

Characteristics: D = 100ppm, C = 50ppm, E = 25ppm
Tolerance: F = 1%, D = 0.5%, C = 0.25%, B = 0.1%
Value = three significant figures and multiplier
J = JAN (joint Army - Navy) brand

RN50: (3 lines)

J50D	JAN, type, characteristic
1211	Value
F137	Tolerance & 3 digit date code

RN55, RN60, RN65, RN70 (4 lines)

DALE	Company Logo
0137J	4 digit date code and JAN brand
RN55D	Type and characteristic
1211F	Value and Tolerance

(RL series are color banded per MIL-PRF-22684)

PERFORMANCE

	MIL-R-10509			
REQUIREMENT	**CHARACTERISTIC D**	**CHARACTERISTIC C**	**CHARACTERISTIC E**	**MIL-PRF-22684**
MIL. Temperature Coefficient	+ 200 - 500ppm/°C	± 50ppm/°C	± 25ppm/°C	± 200ppm/°C
Applicable Vishay Dale Temperature Coefficient	± 100ppm/°C	± 50ppm/°C	± 25ppm/°C	± 200ppm/°C
TEST	**MIL. (Max.)**	**MIL. (Max.)**	**MIL. (Max.)**	**MIL. (Max.)**
Thermal Shock	± 0.50% ΔR	± 0.25% ΔR	± 0.25% ΔR	± 1.00% ΔR
Short Time Overload	± 0.50% ΔR	± 0.25% ΔR	± 0.25% ΔR	± 0.50% ΔR
Low Temperature Operation	± 0.50% ΔR	± 0.25% ΔR	± 0.25% ΔR	± 0.50% ΔR
Moisture Resistance	± 1.50% ΔR	± 0.50% ΔR	± 0.50% ΔR	± 1.50% ΔR
Shock	± 0.50% ΔR	± 0.25% ΔR	± 0.25% ΔR	± 0.50% ΔR
Vibration	± 0.50% ΔR	± 0.25% ΔR	± 0.25% ΔR	± 0.50% ΔR
Load Life	± 1.00% ΔR	± 0.50% ΔR	± 0.50% ΔR	± 2.00% ΔR
Dielectric Withstanding Voltage	± 0.50% ΔR	± 0.25% ΔR	± 0.25% ΔR	± 0.50% ΔR
Effect of Solder	± 0.50% ΔR	± 0.10% ΔR	± 0.10% ΔR	± 0.50% ΔR

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Vishay Intertechnology:

VS-50RIA60 CRCW040213K0FKTD CRCW08051M00FKEA PR01000101603JR500 SE20DLGHM3/I SUD50P04-08-GE3 1.5SMC91A-E3/57T CCF5510K0FKE36 PR02000204709JA100 RS0105R000FE12 RCL12183R30FKEK SMBJ12CA-E3/52 SQD50P08-28_GE3 293D337X96R3D2T-E3 MSS2P3-M3/89A PR03000204700JAC00 LTO150H470R0JTE3 CRCW1206510KFKEA CRCW2512150RFKEGHP ILHB1806ER600V ISOA200R11003JT PTCCL05H280HTE WSL2512R0300FTB PTF5610K000BYEK LTO150H2R200JTE3 BRT13-H-X006 CRCW1206270KJNEA SM8S43AHE3_A/I SS2FN6HM3/H WSL27265L000FEB