


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.07.17	阿 树

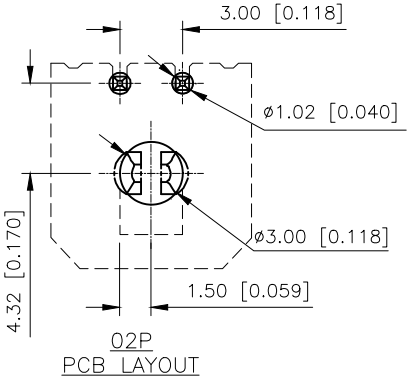

02P
PCB LAYOUT

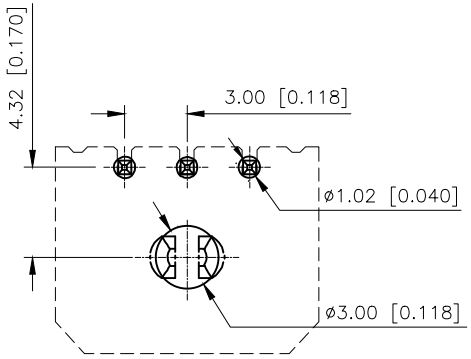

03P
PCB LAYOUT

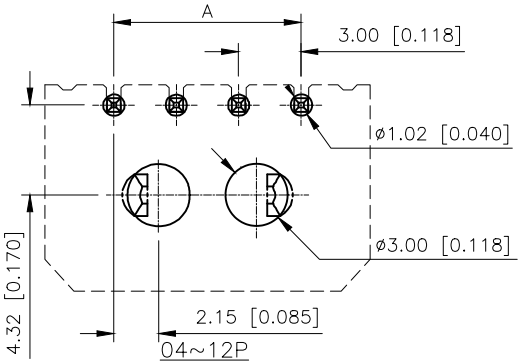


04~12P
PCB LAYOUT

■SPECIFICATIONS
- •Voltage rating:250V AC/DC
- •Current rating:5A AC/DC
- •Withstanding Voltage:1500V AC/minute
- •Temperature range:−45°C+125°C
- •Insulation resistance:≥1000MΩ
- •Contact resistance:≤10mΩ


PART NO.:

X3025 W R−05−LP SW
① ② ③ ④ ⑤ ⑥


① Series No
② Category:W−Wafer
③ Welding Board Angle:R−Stright 90°
④ Row No−Pin No：XX−02P~12P
⑤ Material:LP−LCP UL94V−0
⑥ Planting:SW−Matte Tin
V01:Gold 1u"





02P




03P

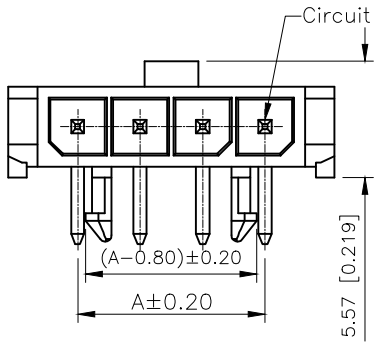

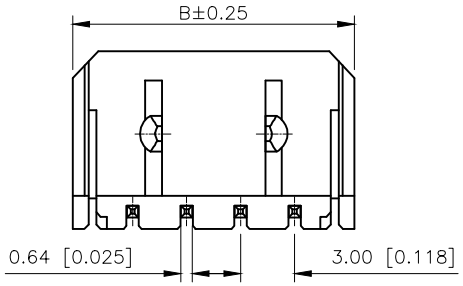

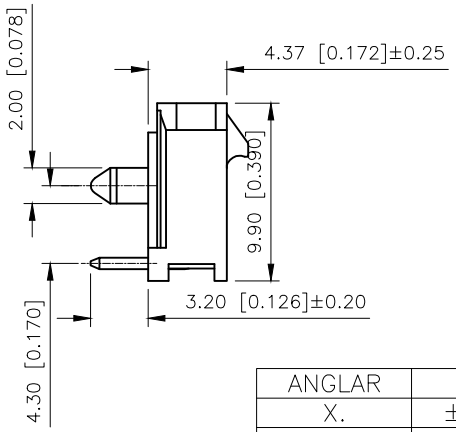



Poles	Dimensions (mm) A	Dimensions (mm) B	Poles	Dimensions (mm) A	Dimensions (mm) B
02	3.00	9.65	08	21.00	27.65
03	6.00	12.65	09	24.00	30.65
04	9.00	15.65	10	27.00	33.65
05	12.00	18.65	11	30.00	36.65
06	15.00	21.65	12	33.00	39.65
07	18.00	24.65			

PART NO	Material	Material(Pin)	Finish	Suitable XKB Housing
X3025WR−05−LPSW	LCP	Brass	Matte Tin	X3025HM−XX
X3025WR−05−LPV01			Gold 1u"	

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKB

DESIGN	阿 树	VIEW:	MODEL TYPE: 3.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X3025WR−05−LPSW
APPROVED		SIZE: A4	DWG NO.: X−X3025WR−05−LPSW

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1