



NOTES:
1.Circuit:ON/OFF
2.Operation force:500±200gf
3.Electrical rating:15A 125VAC
8A 250VAC
12(6)A 250V~
4.Contact resistance:<50mΩ
5.Insulation resistance:>100MΩ(500VDC between open contacts)
6.Dielectric strength:>1500V 1 minute
7.Color: cover is red, body is black.




Panel cut out(Thickness: 3mm Max)

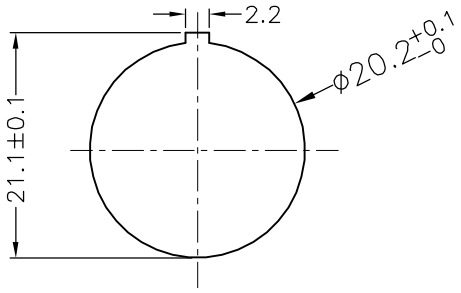


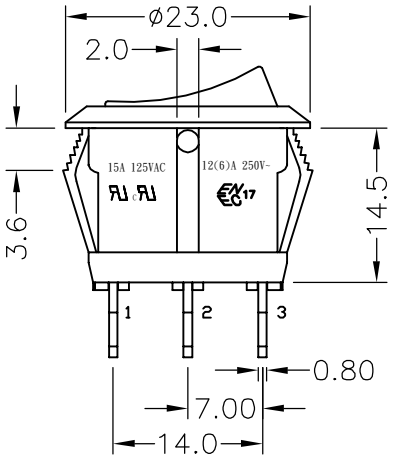


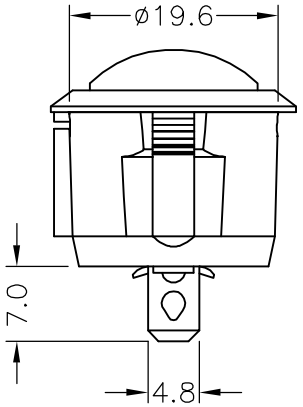

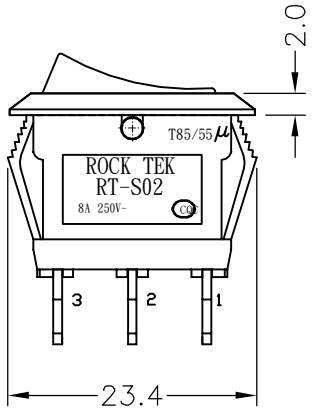

Circuit of Switch





NO	DESCRIPTION	NO	DESCRIPTION
5	→	10	→
4	→	9	→
3	→	8	→
2	→	7	→
1	→	6	→

DIMENSIONAL TOLERANCES	
RANGE	TOLERANCE
X	±0.4
X.X	±0.3
X.XX	±0.2
ANGLES	±0.5°

APPROVED	CHECKED	DESIGN	DRAWN
			SIMON 2008.07.22

ROCK TEK ELECTRICAL(SHENZHEN) CO.,LTD.

ALL SIZE ARE IN	MM
SCALE	FIT
MAT'L	***
MATERIAL NO.	RT-S02-113-R42BR
DRAWING NO.	WIF108023
REV	A