

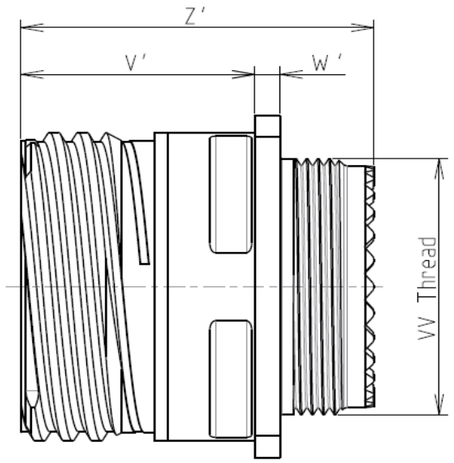


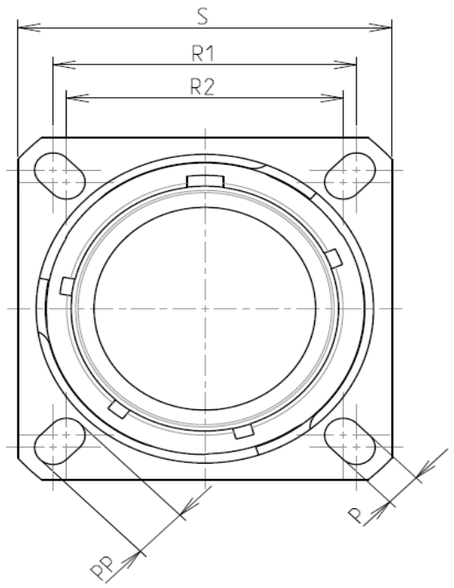

Keying Shown as example

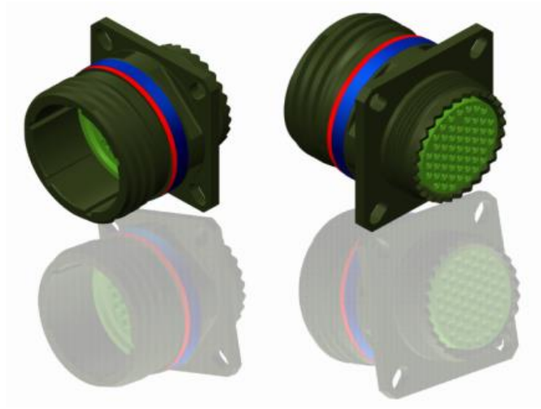

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Composite
-Shell Plating : Olive drab Cadmium
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories
-Temperature Range : -65°C to +175°C
-Salt Spray : 2000 hours

Connector dimension	
Dim	**Nominal**
P	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M15x1-6g

BASIC SERIES:	8D	0	-	11	J	02	H	N
SHELL TYPE : Square Flange Receptacle								
CONTACT TYPE : Standard Crimp Contact								
SHELL SIZE : 11								
PLATING : J = Olive drab Cadmium								

ORIENTATION : N
CONTACT TYPE : PIN (1500 Matings)
CONTACT LAYOUT : 11-02

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D011J02HN

ISS	DATE	Latest modification - by	MOD N°
A	14-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**


TITLE Composite Receptacle 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU | WWW.SOURIAU.COM | This document is the property of SOURIAU
it must not be reproduced or
communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D011J02HN-C | SHEET 1/2


Contact Layout




Contacts (Insert arrangement 11-2)		
Contact position ID	Contact location	
	X-axis (mm)	Y-axis (mm)
A	+.095 (2.41)	+.000 (.00)
B	-.095 (2.41)	+.000 (.00)

Shell size	Arrangement no.	Number of contacts	Size contacts	Service rating	Contact location
11	-2	2	16	I	All

Panel Cutout

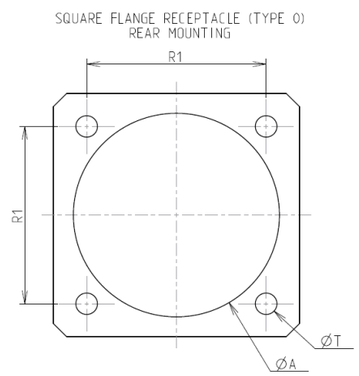

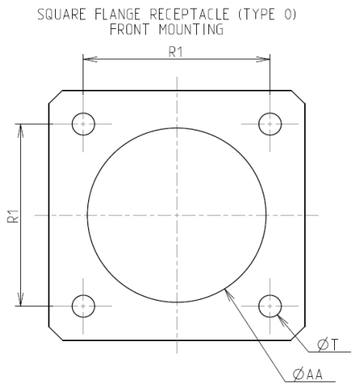

Dim	Nominal
ØA	20.22 min
ØAA	15.88 min
R1	20.62
ØT	3.25 ±0.13

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D011J02HN

ISS	DATE	Latest modification - by	MOD N°
A	14-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Composite Receptacle 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D011J02HN-C | SHEET 2/2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Souriau-Sunbank:

BIS10PLN0416M UT010LPGN UTS08E3P UTGX1JC103P D38999/26JJ24PN RM28M1K UTG22PG UTSX0128P UTGX71419P 8MQ2M01L28ADE SC20WL-3S25 SC24ML-1D70 UTS10DCGE 8MQ2M0816BCE D38999/26MJ24PN-LC UTP14DCG 8MQ2M0412PB 8MQ2M0412RCE SC24WL-3S25 UT001412SH UT0S16JCS UTS6JC1823S 8D525M24PN 8MQ2M0412ABE 8MQ2M1220AD UT061619SH UTG11412PH UTL6122G1W5P UTS6JC1823P SM16ML-1S6