




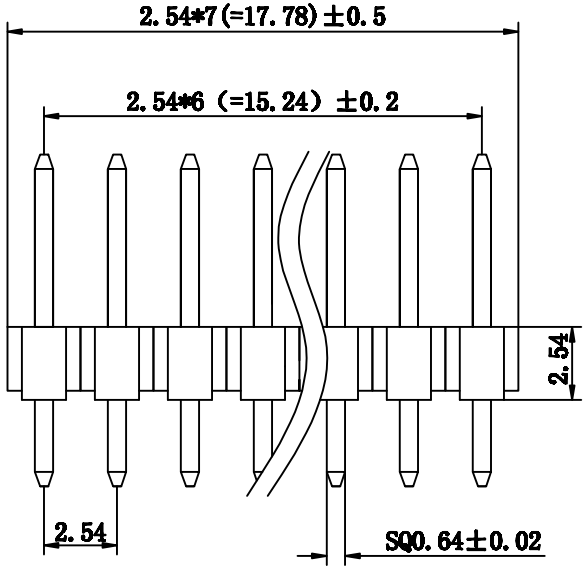

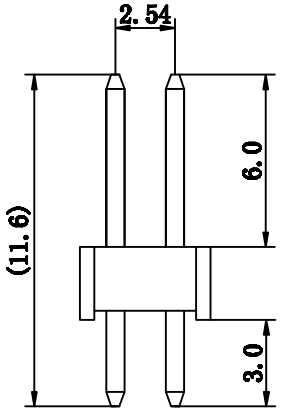

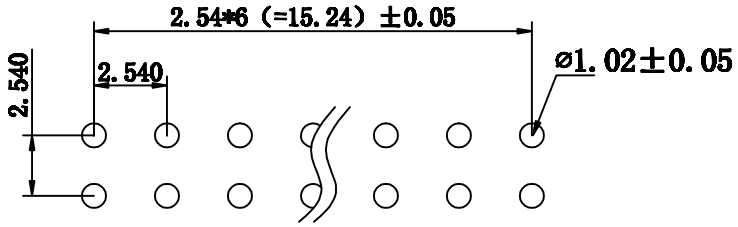

RECOMMENDED P.C.B LAYOUT

Specification
Insulator Material: Polyesetr,UL94V-0
Standard: PBT
Contact Material: Brass
Contact plated: Gold Over Nickel

Poles:2~40P (Double)
Current Rating : 3Amp
Contact Resistance:20 Milliohms Max
Insulation Resistace : 1000MΩ Min.
Dielectric withstanding Voltage:AC 500V
Operation Temperature : -40℃ -- +105℃

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO.,LTD
CHECKED:	DATE:	TITLE: 210S-2*7P L=11.6MM PBT 镀金
DRAWN: LYF	DATE: 2010-08-12	CLIENT P/N C2895035
		UNIT mm SCALE free
		FILE NO. B-2100S14P-B100 REV. A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Ckmtw:

S082520012 S152920020 B-2100N06P-B111 B-2202R40P-A120 B-3002S40P-0110 D-DMR009PM-D002 F-FPC1M18P-A310 S082540002 B-2200S07P-A120 U-USBAR04P-M003 W-2510S04P-0000 B-2100S06P-B110 B-2100S16P-B110 B-2200S14P-A120 U-USBAN04P-F005 B-3002S14P-0110 S191020002 B-2100R28P-B110 B-2202N10P-B121 DDMRH15PFE006 R-RJ45S08P-B000 9-EDK0009P-0000 B-2100S03P-A110 B-2100S10P-A110 B-3100S24P-A110 W-2510S10P-0000 B-2100S32P-B110 B-2201S50P-A120 F-FPC0M30P-A310 B-3100S30P-A110