

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210686	2021/05/12	Vicky	B X4





Recommended Panel Cut-Out


B
M8S-XXPFFR-SF8001

XX: No. Of Pin




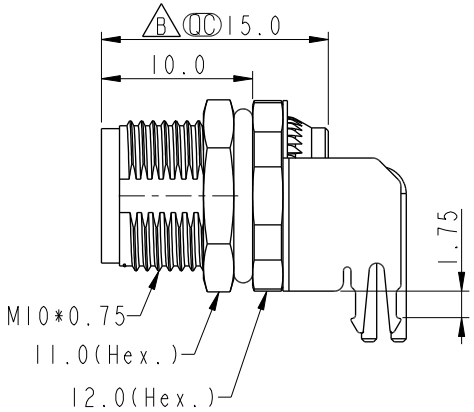




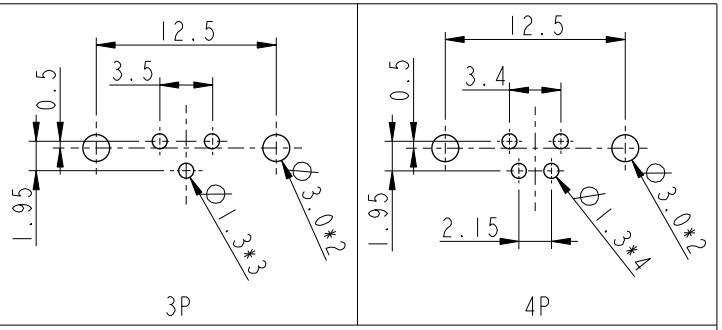

PCB Layout

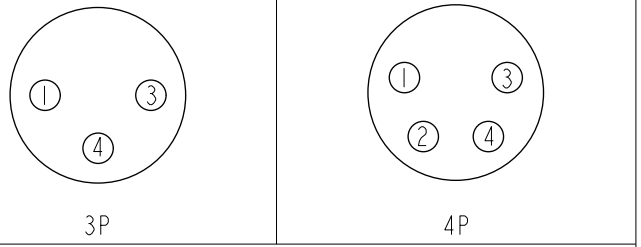

Pin Assignments Front View

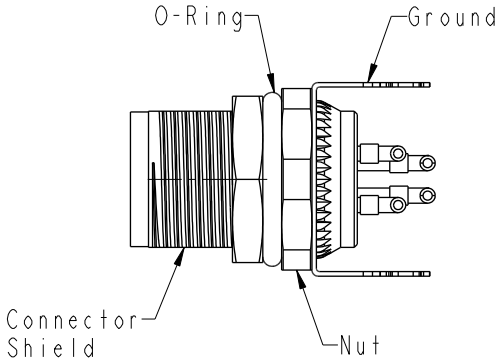

B Note:
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  O-Ring: Rubber, Green
* Shield: Metal
* Ground: Metal
* Nut: Metal
* O-Ring: Rubber, Green
* For panel thickness: 2.0~4.5mm
* For pcb thickness max: 1.6mm
* Nut is packed separately in pe bag

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: N SEN, M8-SHLD, SCREW RECEPTACLE, F, F, PCB R B

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1

REV. B | WC-REV. A.12 | QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY Yulong_wang	DATE 2016-01-20
DWG NO M8S-XXPFFR-SF8001		CHECKED BY Cary	DATE 2016-01-20
CUSTOMER ALTW		APPROVED BY Jerry	DATE 2016-01-20

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

AMPHENOL LTW:

DD-18BMFA-LL7001 DT-HCM-G3BFF-RLA60 LAD-05BFFM-QR8D01 8-03PMMS-SH7002 AD-03BMMA-LL7001 M12A-04PFFS-SF8002 BD-03BFFA-QL8MP0 DC-05BMMA-QL8MPP DT-HCM-G3BMM-RLA60 M12A04FL-12AFR-SDA05 MSBP05MR-SBPMR-SB001 PWC-03BFFA-LL7002 PWCU-04RMFS-LC7002 RCP5SM-SPG06M-TL7B01 8-04PMMS-SH7002 ASU-08PMMS-QC8A15 M12A04FR-12AFR-SD001 RCP5UM-UPG06M-TL7A01 M12A-17BMMM-PL8D04 ACC-03AFFM-LL7A01 Q8DU-05PMMS-QF8001 PWM-02BFMB-TL7001 DC-05BMFB-QL8APP FLBB-04FGMS-GCP-207 FLKD-07EGFS-GCP-001 M12A-03PMMS-SF8001 MSAP-12BMMA-SL7001 MSBS-05PFFR-SF7003 BSU-10PMMS-SC7001 CC-03BFMB-QL8APP