



REV.	DATE	DESCRIPTION
NC	05/01/04	INITIAL RELEASE

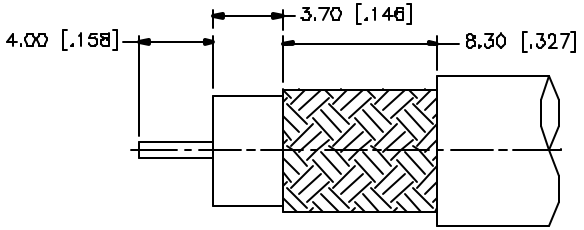

RECOMMENDED
CABLE STRIPPING DIM'S

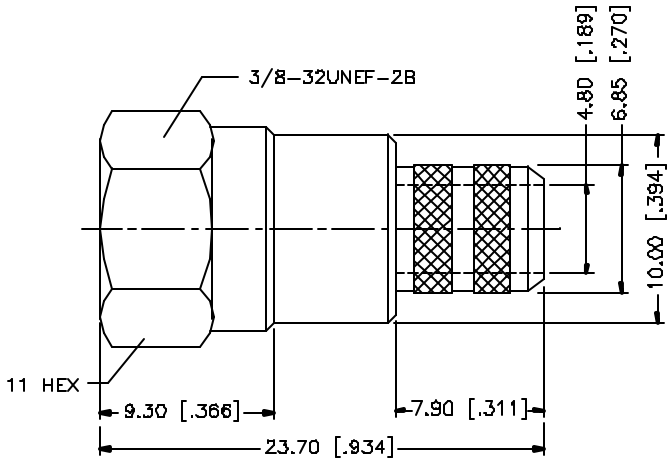

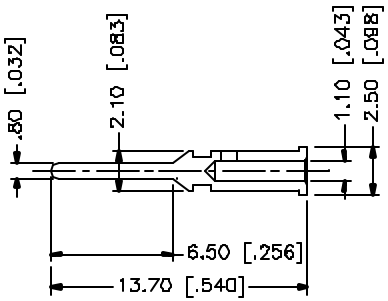

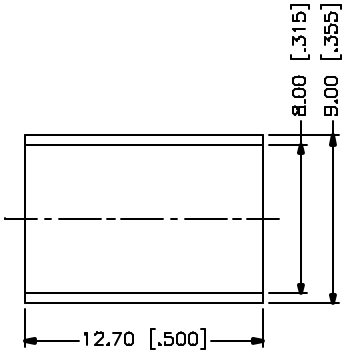

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	BRASS	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	DELRIN	NATURAL	1
1	BARREL	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.60mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	05/01/04
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/222/222123.DWG

Amphenol Connex

PART DESCRIPTION
F CRIMP PLUG
(FOR RG-6/U)

PART NO. 222123

DWG. NO.	REV.	SIZE	SCALE
222123.DWG	NC	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

70430-164LF DAPO15S365TLF LD15P33E4GV00LF 76384-316LF 67996-204HLF 68000-236HLF LD25S33E4GV00LF 86093967896755LF 86093968191755E3LF 863013A 54202-G0805CLF 68001-108HLF 70234-112LF 95157-140LF DCMF37P 54202-S08-07LF 68001-200HLF 86093488314745V1LF RJE061661210 RJSBE5080C2 68002116HLF 69192-408HLF 70218-1116LF 86130202123355E1LF 91614-403ALF CD15S13E4RV09LF DEM09P032N D15P13A6RV12LF 86093968813H45V1LF 65781-158