
NOTES:

1. MATERIALS AND FINISHES:
   BODY – BRASS, NICKEL PLATING
   CONTACT – BRASS, GOLD PLATING
   INSULATOR – TEFLON, NATURAL
2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: – 65°C to +165°C
4. SOLDER CONTACT TO CABLE.
   WHEN CRIMPING CONTACT PIN TO CABLE, CRIMP WITH AMPHENOL TOOL 227–944 (M22520/5–01) AND DIE SET 227–1221–11, CAVITY 'B' (M22520/5–11, CLOSURE 'B')
5. WHEN CRIMPING FERRULE TO CABLE, CRIMP WITH AMPHENOL TOOL 227–944 (M22520/5–01) AND DIE SET 227–1221–11, CAVITY 'A' (M22520/5–11, CLOSURE 'A')


THIRD ANGLE PROJ.


REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
B	SEE SHEET 1	19–Mar–04	— —	TOM
B1	SEE SHEET 1	30–Jun–05	— —	SH
C	SEE SHEET 1	25–Feb–08	— —	AW
Y	SEE SHEET 1	07–Mar–10	47967	SH
AA	NOTE 4 WAS CHANGED\RD–10121301F	27–Dec–10	48342	SH

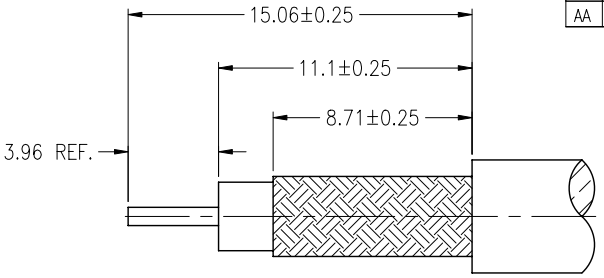

RECOMMENDED
CABLE STRIPPING DIM'S

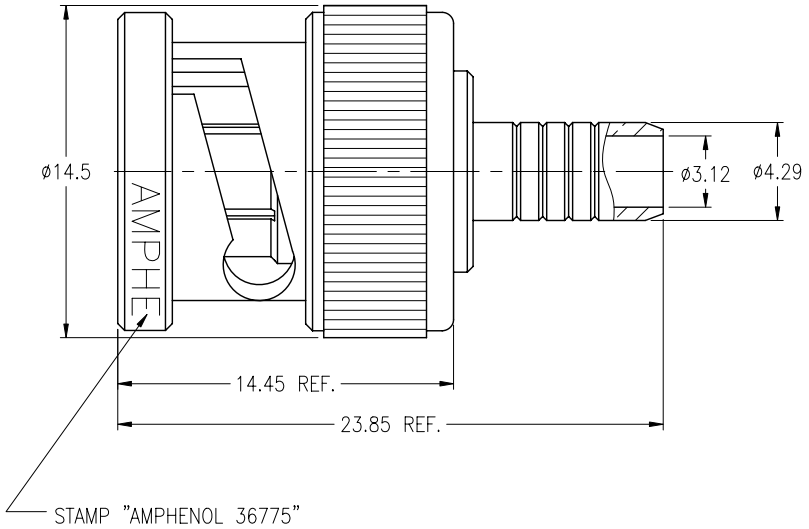

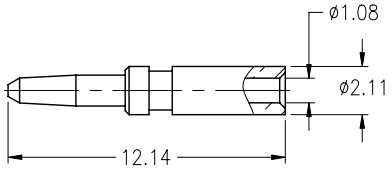

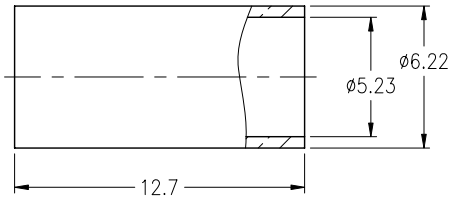

THIS CONNECTOR IS COVERED BY U.S. PATENT 3,336,563

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ±0.05mm | 0.5 – 6mm ±0.1mm | 6 – 30mm ±0.2mm | 30 – 120mm ± 0.3mm | ANGLES ±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN F.WANG DATE 27–Dec–10
ENGINEER S.LI DATE 27–Dec–10
APPROVED S.HSIEH DATE 27–Dec–10
CAD FILE F:\DWG\CNPD\36775–AASZ

TITLE
BNC PLUG QUICK CRIMP
(FOR RG–58/U, 141/U CABLE)

SCALE: 3/1 | SHEET 2 OF 2
DWG SIZE B | CODE ID 74868 | REV AA

Amphenol RF
Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. 36775
ITEM NO. 36775
PART NO. 36775

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

70430-164LF 54202-G0805CLF 86093488314745V1LF LD15P33E4GV00LF 68002116HLF 86093967896755LF 86093968813H45V1LF 95157-140LF CD15S13E4RV09LF DEM09P032N 65781-158 69192-408HLF 70234-112LF RJSBE5080C2 54202-S08-07LF 76384-316LF LD25S33E4GV00LF 67996-204HLF 70218-1116LF 86093968191755E3LF 91614-403ALF D15P13A6RV12LF 86130202123355E1LF 863013A DAPO15S365TLF DCMF37P RJE061661210 68000-236HLF 68001-108HLF 68001-200HLF