

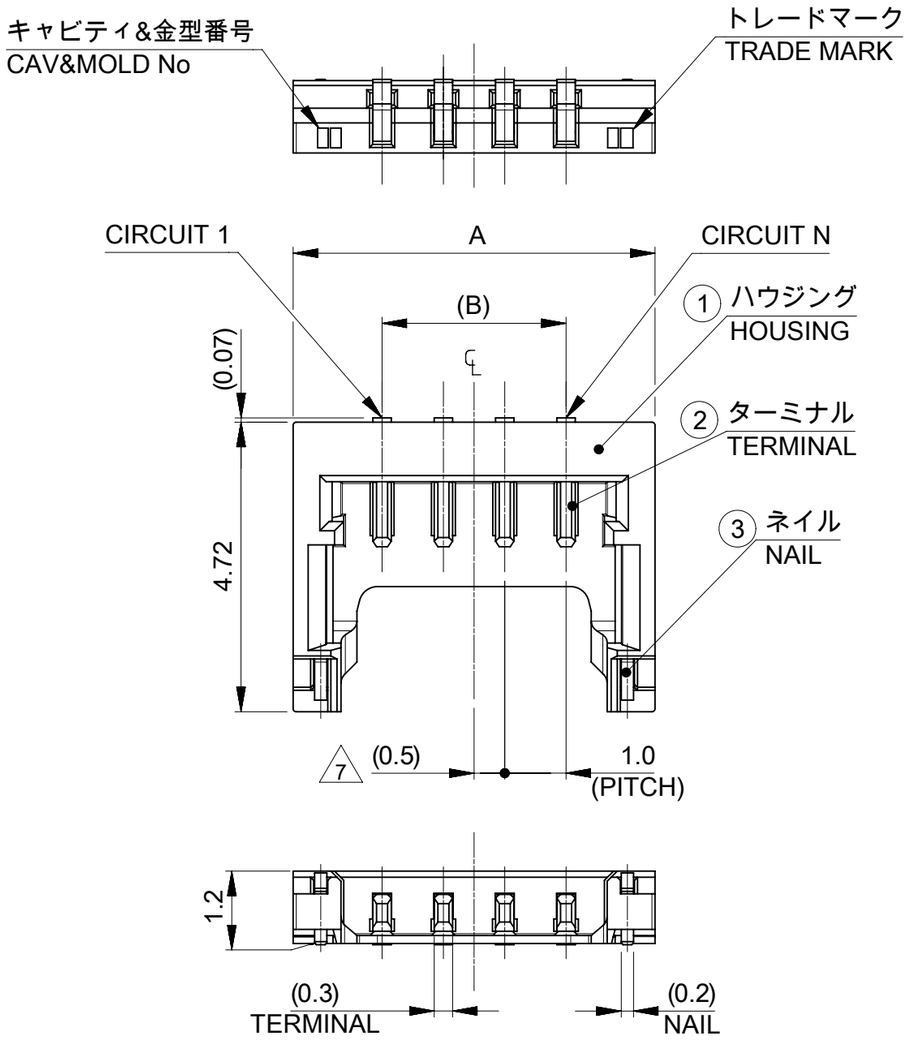


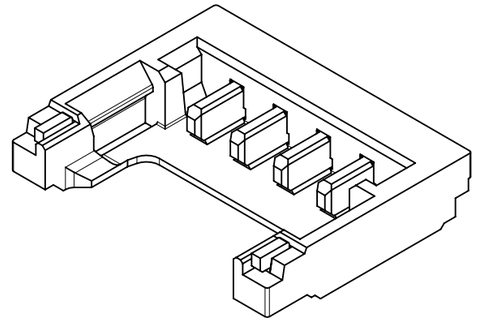

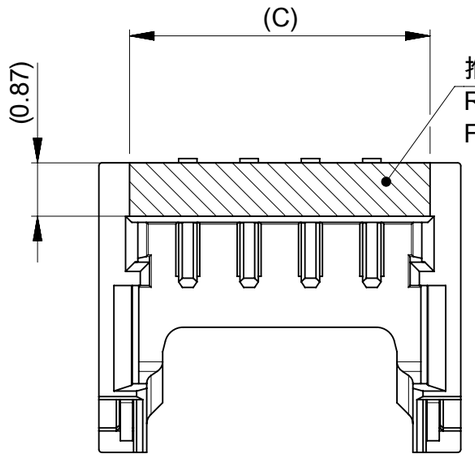

注記
NOTES

1. 材料および仕上げ(めっき仕様)
   MATERIAL AND FINISHES: SEE TABLE 1
2. 製品仕様書：2121320000-PS/PS /000
   PRODUCT SPECIFICATION: 2121320000-PS/PS/000
3. 梱包形態 SHEET 3 参照
   PACKAGING INFORMATION : SEE SHEET 3
4. 嵌合相手：212132シリーズ
   MATE WITH:212132 SERIES
5. アプリケーション仕様書(コネクタ取扱い説明書)：2166940000-AS/PS/000
   APPLICATION SPECIFICATION(CONNECTOR MANUAL) : 2166940000-AS/PS/000
6. 端子テール部及びネイルの平坦度:0.1 MAX.
   TAIL AND NAIL COPLANARITY TO BE 0.1 MAX.
7. 極数 = 偶数に適用
   APPLY FOR CIRCUIT SIZE = EVEN

1 TABLE 1

番号 NO.	部品 PART	材質 MATERIAL	
1	ハウジング HOUSING	ポリアミド(PA)ガラス入り, UL94V-0, 色：黒 POLYAMIDE(PA) GLASS FILLED, UL94V-0, COLOR : BLACK	
2	ターミナル TERMINAL	銅合金 COPPER ALLOY	
		下地めっき UNDER PLATING	ニッケルめっき(下地)：1.0 micro-meters MIN NICKEL (UNDER PLATING)
		接点部 CONTACT	金めっき：0.1 micro-meters MIN GOLD PLATING
		テール TAIL	金めっき GOLD PLATING
3	ネイル NAIL	黄銅 BRASS	
		下地めっき UNDER PLATING	ニッケルめっき(下地)：1.0 micro-meters MIN NICKEL (UNDER PLATING)
		めっき PLATING	錫めっき：1.0 micro-meters MIN MATTE TIN PLATING

DOCUMENT STATUS	P1	RELEASE DATE	2020/09/17 06:07:18

6.9	5	7.9	6
5.9	4	6.9	5
4.9	3	5.9	4
3.9	2	4.9	3
2.9	1	3.9	2
C	B	A	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	3.0 °
4 PLACES	±	0.2
3 PLACES	±	0.2
2 PLACES	±	0.2
1 PLACE	±	0.2
0 PLACES	±	0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 643659
DRWN: SNAKAMURA08 2019/03/18
CHK'D: SAKIYAMA 2020/09/17
APPR: KOMURAKAMI 2020/09/17

INITIAL REVISION:
DRWN: SNAKAMURA08 2019/03/18
APPR: KOMURAKAMI 2020/09/17

molex


PICO-EZMATE PLUS 1.0 W/B
PLUG ASSEMBLY FOR GENERAL

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2121340000-SD	PSD	000	A

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A3-SIZE	212134	SEE SHEET 3	GENERAL	1 OF 3

FORMAT: master-lb-prod-A3
REVISION: J
DATE: 2020/01/14

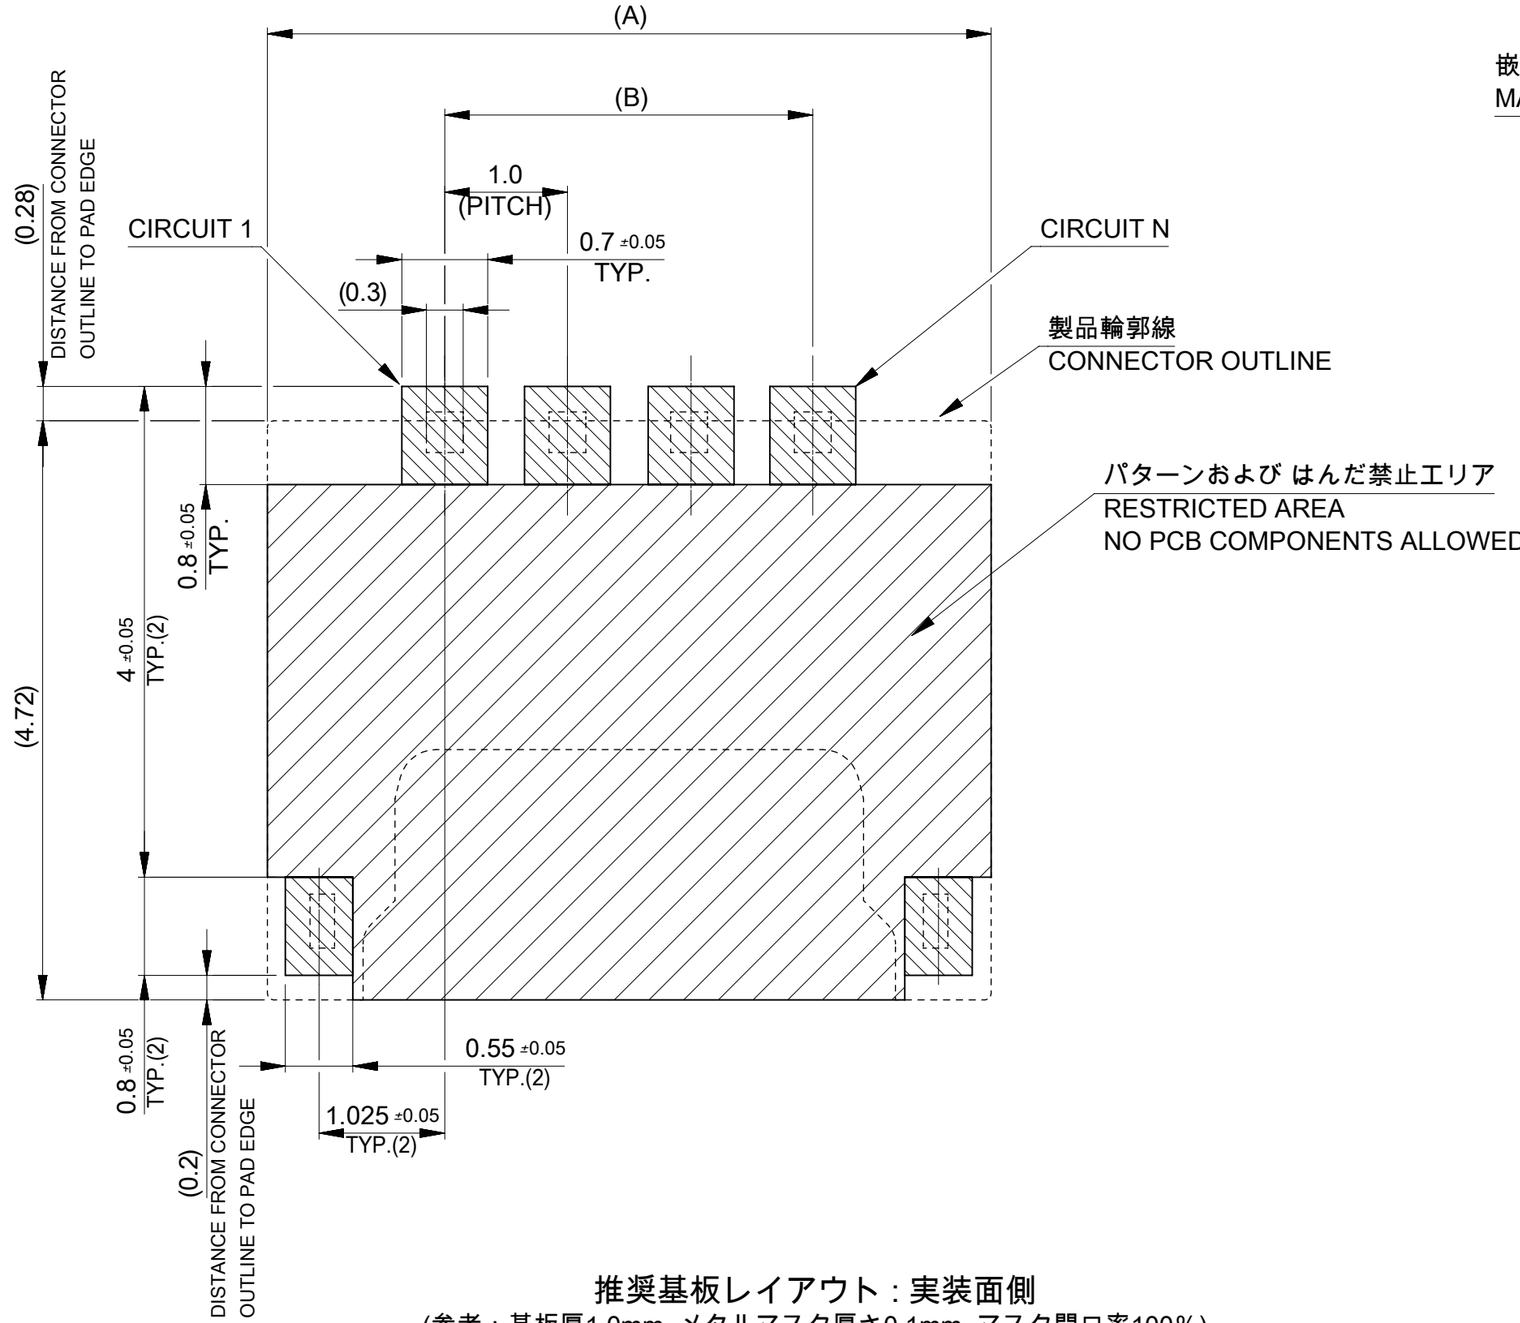


推奨基板レイアウト：実装面側

(参考：基板厚1.0mm, メタルマスク厚さ0.1mm, マスク開口率100%)

POLARIZED RECOMMENDED PCB LAYOUT : COMPONENT SIDE

(REFERENCE: PCB THICKNESS 1.0mm, STENCYL THICKNESS 0.1mm, APERTURE RATIO 100%)

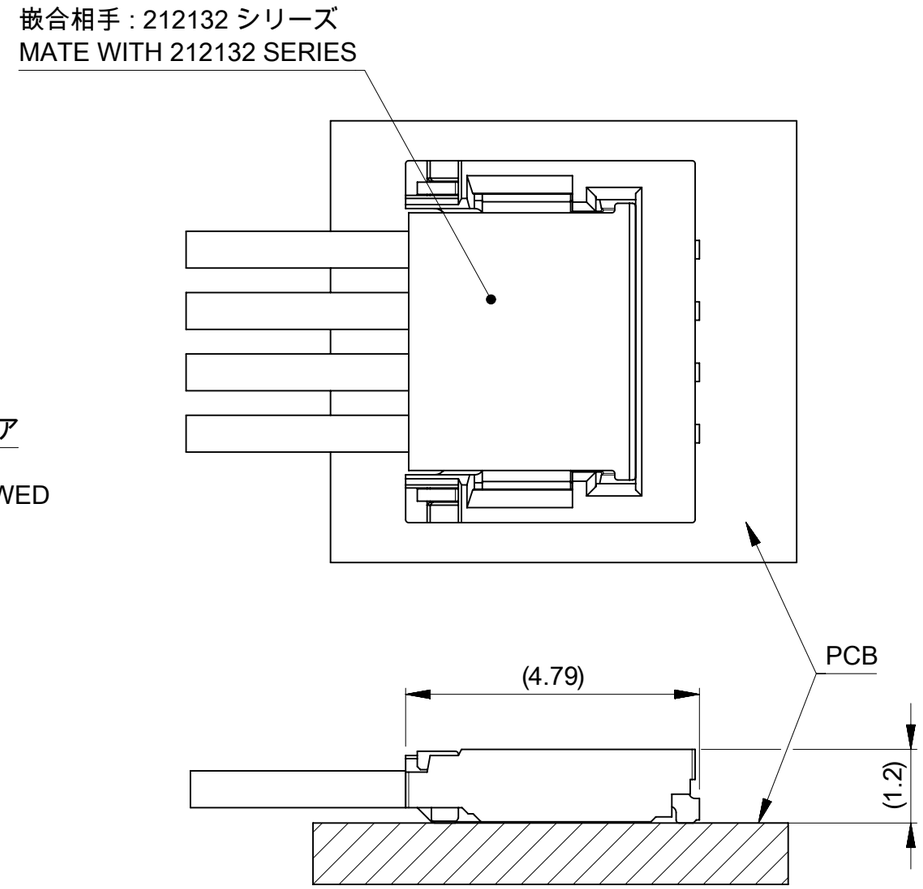

嵌合図

MATED CONNECTORS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	mm
SCALE	NTS
GENERAL TOLERANCES (UNLESS SPECIFIED)	
ANGULAR TOL	± 3.0 °
4 PLACES	± 0.2
3 PLACES	± 0.2
2 PLACES	± 0.2
1 PLACE	± 0.2
0 PLACES	± 0.2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC:

EC NO: 643659
DRWN: SNAKAMURA08 2019/03/18
CHK'D: SAKIYAMA 2020/09/17
APPR: KOMURAKAMI 2020/09/17

INITIAL REVISION:
DRWN: SNAKAMURA08 2019/03/18
APPR: KOMURAKAMI 2020/09/17

molex

PICO-EZMATE PLUS 1.0 W/B
PLUG ASSEMBLY FOR GENERAL

PRODUCT CUSTOMER DRAWING


DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2121340000-SD	PSD	000	A


THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A3-SIZE	212134	SEE SHEET 3	GENERAL	2 OF 3

DOCUMENT STATUS	P1	RELEASE DATE	2020/09/17 06:07:18

FORMAT: master-lb-prod-A3
REVISION: J
DATE: 2020/01/14


引き出し方向
PULL OUT DIRECTION

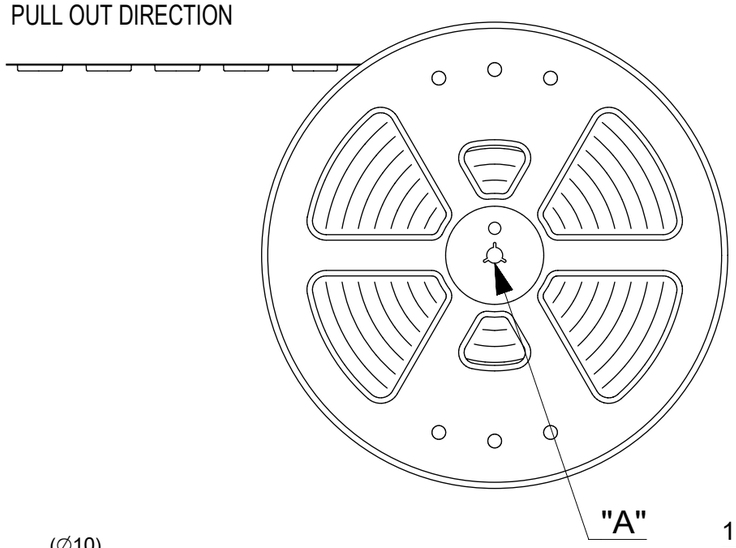

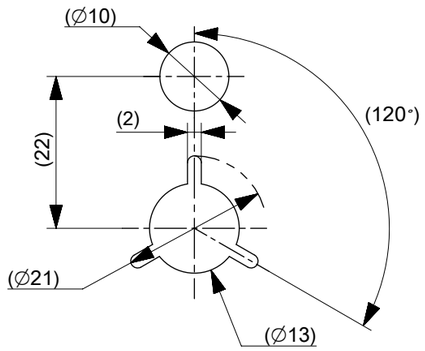

DETAIL "A"


⑥ リール
REEL

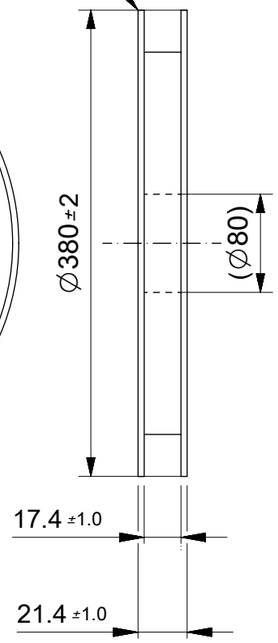

引き出し方向
PULL OUT DIRECTION


⑤ トップテープ
TOP TAPE

④ エンボステープ
EMBOSSED TAPE

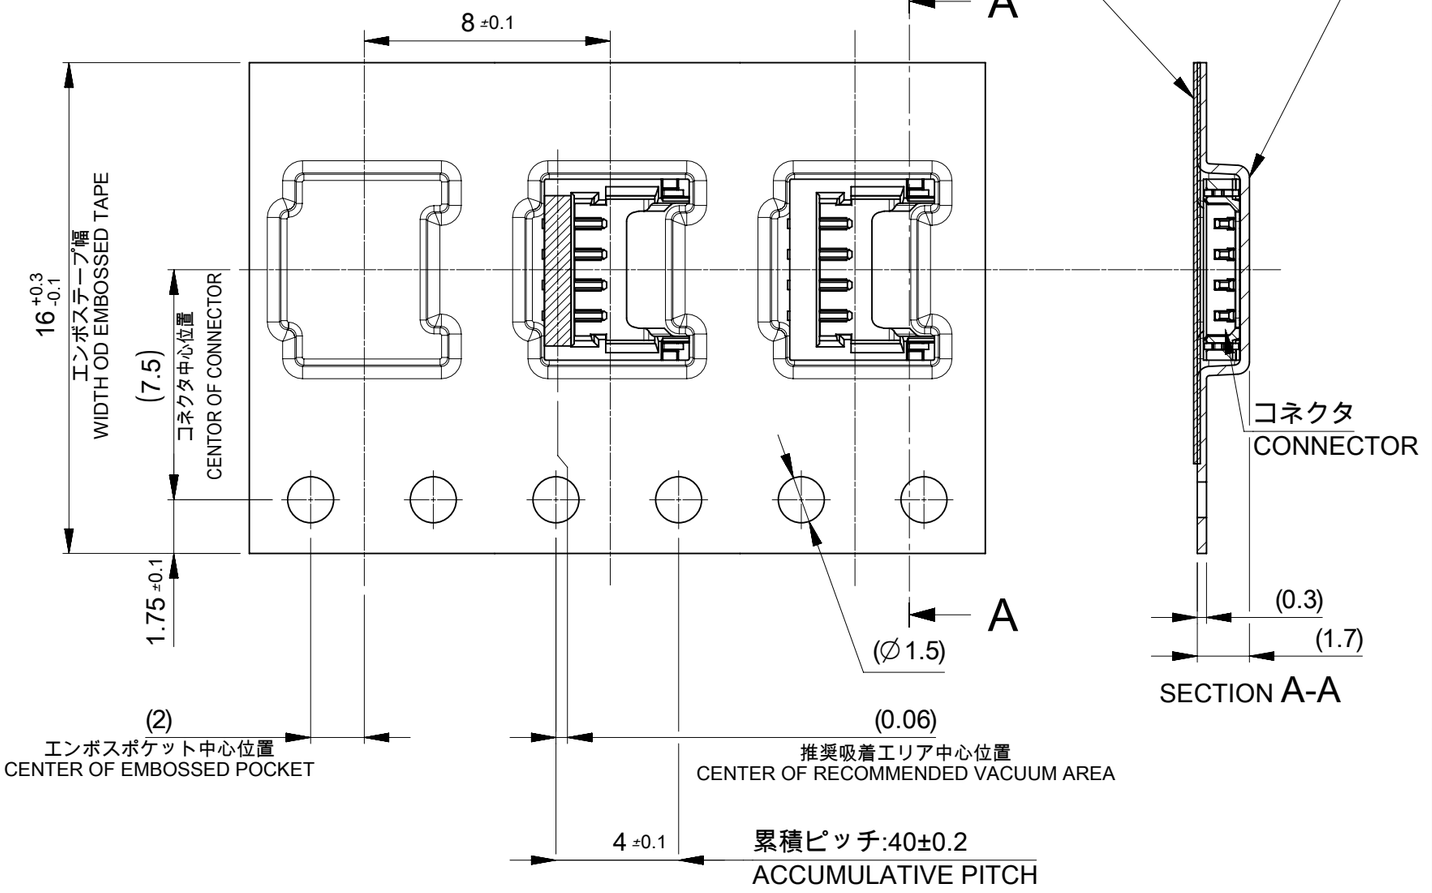

NOTES

8. 梱包数量 : 7000個/リール
   NUMBER OF CONNECTORS : 7000 PIECES/REEL
9. リードテープ長さ
   LEAD TAPE LENGTH

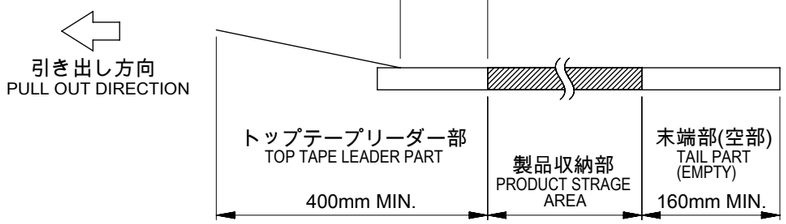

10. トップテープの剥離強度はIEC60286-3に準拠。
    TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.
11. 梱包仕様書 : 2121349200-SPK/PS/000
    PACKEGING SPECIFICATION : 2121349200-SPK/PS/000

番号 NO.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSED TAPE	ポリスチレン (PS),その他 POLYSTYRENE(PS), etc
⑤	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), etc
⑥	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

DOCUMENT STATUS	P1	RELEASE DATE	2020/09/17 06:07:18

発注番号 ORDER No.	
2121340006	6
2121340005	5
2121340004	4
2121340003	3
2121340002	2
梱包形態 : エンボスリール PACKAGING STYLE : EMBOSSED TAPE AND REEL	極数 CIRCUIT SIZE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	3.0 °
4 PLACES	±	0.2
3 PLACES	±	0.2
2 PLACES	±	0.2
1 PLACE	±	0.2
0 PLACES	±	0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 643659
DRWN: SNAKAMURA08 2019/03/18
CHK'D: SAKIYAMA 2020/09/17
APPR: KOMURAKAMI 2020/09/17

INITIAL REVISION:
DRWN: SNAKAMURA08 2019/03/18
APPR: KOMURAKAMI 2020/09/17

molex

PICO-EZMATE PLUS 1.0 W/B
PLUG ASSEMBLY FOR GENERAL

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2121340000-SD	PSD	000	A

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A3-SIZE	212134	SEE TABLE	GENERAL	3 OF 3

FORMAT: master-tb-prod-A3
REVISION: J
DATE: 2020/01/14

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

152670251 152670269 190990010 444280402 0190690033 190690096 760475001 0436802002
447641402 459705185 151670255 152670357 430450225 430451220 152660117 398800403 439151216
447691602 759001161 151660057 417920538 447642001 190730231 190990009 436803002
5046940301 0190700155 0436400901 190670071 397730002