
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

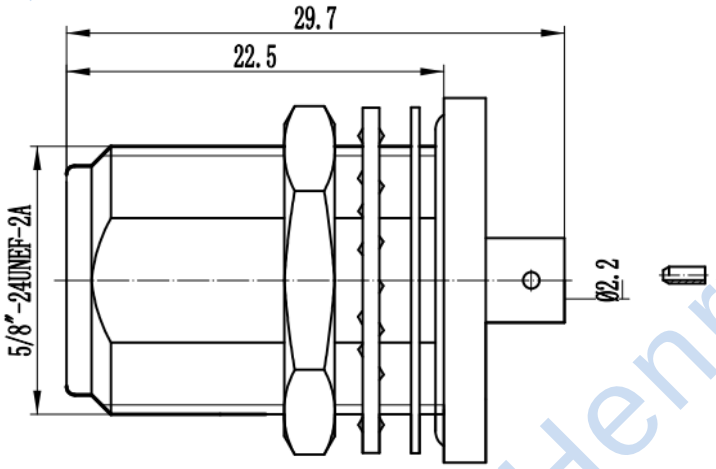

1 Electrical


1.1 Impedence	50Ω
1.2 Frequency	DC-6GHz
1.3 Dielectric withstanding voltage	1500V(volts RMS)
1.4 Center contact resistance	≤ 1MΩ
1.5 Outer contact resistance	≤ 0.2MΩ
1.6 Insulation resistance:	≥5000MΩ

2 Environmental&Mechanical

2.1 Temperature range	-45℃~125℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&Finish

3.1 Body:	Brass, Nickel plated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Bronze, silver plated
3.4 Nut:	Brass, Nickel plated
3.5 Gasket:	Silicon rubber(red)
3.6 Washer:	Brass, nickel plated

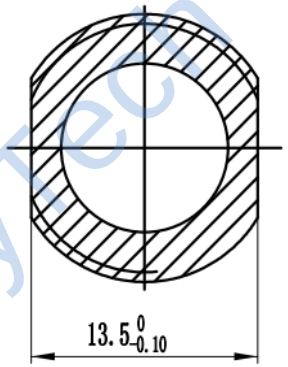

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector N Female B/H Conn. For 086 Cable				
ENGINEER: L. yu 19/03/17					
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50, .X ±0.20, .XX ±0.10, ANGLES ±1°		HenryTech			
		DIMENSION IN MILLIMETERS (mm)			
	PART NO: HL-N-KYB2T	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HT-HFCN-3800+ HT-LFCG-1700+ HX-1.85-JJ HL-N-KKC HL-SSMA-KHD-1 HN-DC2016-0.5(12-4.6)M HN-LP7-0.5-1.27(9.4-2.8) HT-BFHKI-1572+ HL-MCX-KE-02 HLCC2250G HG-SCN-2-65+ HT-SCA-4-10+ HT-LFCN-3800+ H3-MABA-010551-CF1071 H3-MABA-011085 H3-MAPD-008109-C30040 HL-SMA-KHD4 HL-SMA/SMB-KK HT-HFCN-2700+ H3-MABA-007871-CT1A40 H3-TC1-1TG2+ HL-SMB-K3DY HX-SMA/SMP-JK HX-N-JK H2SYDC-20-62HP+ HT-LFCN-400+ HT-QCN-19+ HG-SCN-2-22+ HL-SMAMF-2-18-15dB HT-LFCG-530+