


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE




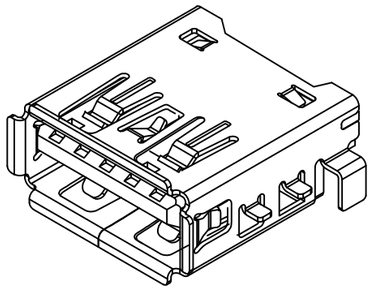



3D VIEW

PIN NUMBER	SIGNAL NAME
PIN 1	Vbus
PIN 2	D−
PIN 3	D+
PIN 4	GND
PIN 5	StdA_SSRX−
PIN 6	StdA_SSRX+
PIN 7	GND_DRAIN
PIN 8	StdA_SSTX−
PIN 9	StdA_SSTX+
SHELL	GND

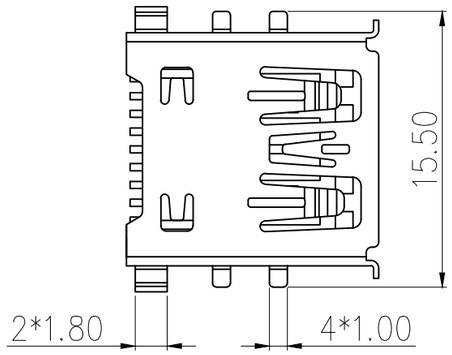


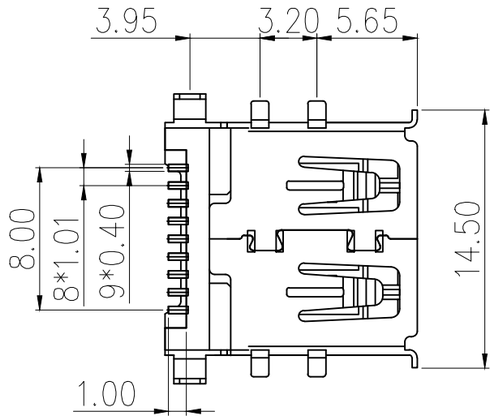

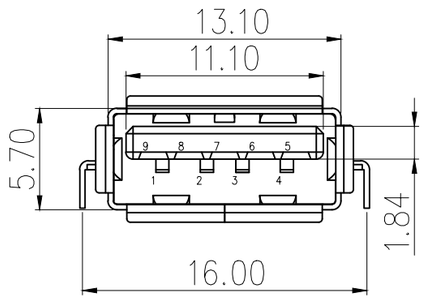

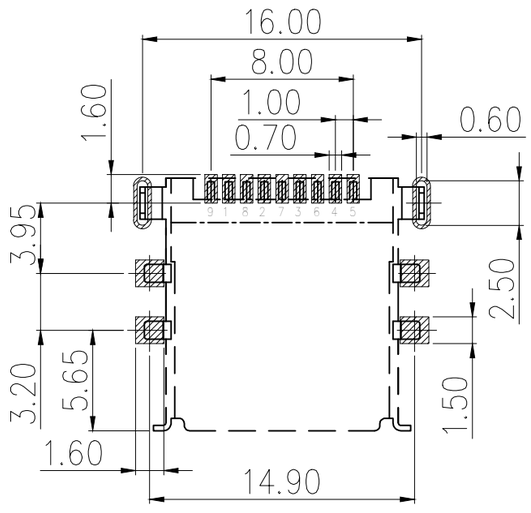

RECOMMEND PCB LAYOUT(±0.05)

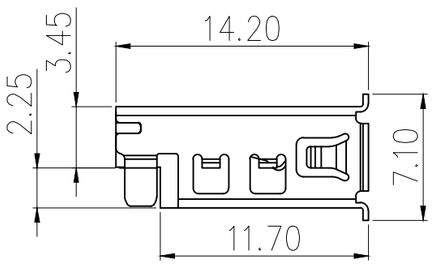

NOTES
1. MATERIAL:
   1.1. HOUSING: LCP ,COLOR IS BLUE,HIGH TEMPERATURE PLASTIC;
   1.2. CONTACT: BRASS (H65 T=0.20mm);
   1.3. SHELL: COLD ROLLED IRON (SPCC T=0.30mm);
2. ELECTRICAL:
   4.1. VOLTAGE RATING: 30V DC ;
   4.2. CURRENT RATING: 1.5A ;
   4.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   4.4. WITHSTAND VOLTAGE: 100V AC RMS 50(60)Hz,1MIN.;
   4.5. INSULATION RESISTANCE: 100MEGOHMS MIN @500V DC;
5. MECHANICAL:
   5.1. MATING FORCE: 35N MAX.;
   5.2. UNMATING FORCE: 5~35N ;
   5.3. OPERATING LIFE: 1500 CYCLES MIN.;
6. PLATING:
   6.1. TERMINAL:
        NI PLATING OVER ALL,
        Tin PLATING ON SOLDER AREA,
        Au G/Fu" ON CONTACT AREA;
   6.2. SHELL: NI PLATING OVER ALL;
7. ENVIRONMENTAL:
   7.1. STORAGE TEMPERATURE RANGE: −40℃~+85℃
   7.2. OPERATION TEMPERATURE RANGE: −25℃~+70℃;
8. SALT SPRAY TEST: 24H(EXCLUDING RIVETED BENDS)

序 号	品 名	材 质	电镀/颜色	备 注
3	外壳	铁	镀镍	
2	接触	铜	镀金	
1	基座	LCP	蓝色	

深圳市虹成电子有限公司

品 名 TITLE	USB座
料 号 PART NO	HC-USB3.0-C225-J
比 列 SCALE	1:1
单 位 UNIT	MM
张 数 PART NO	1 OF 1
版 本 REV	A
制 图 DRAW	AhYe
审 核 CHECKED	夏操云
批 准 APPROVE	赵亮亮

UNLESS OTHERWISE, GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
ANGULAR:
X.xx° ±1°
X.x° ±3°
X.° ±5°

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HC-FPC-0.5-40P-FH20 HC-PHB2.0-2x5A HC-PZ254-11.5L-1x10PZ HC-PZ254-11.5L-1x20PZ
HC-USB3.0-L257-J HCZZ0451-6 HC-FPC-0.5-24P-FH20 HC-PZ254-11.5L-2x18PZ HC-USB3.0-C26
HC-USB3.0-L175-2X1-J HC-PM254-8.5H-1x21PZ HC-PZ127-7.2L-2x3PS HCZZ0576-5
HC-PZ254-13.8L-1x6PWA HCZZ0530-4 HC-FPC-0.5-10P-FH20 HC-PHB2.0-2x4AW
HC-PM254-5.0H-2x10PZ HCZZ0001-2 HCZZ0032-6 HC-FPC-0.5-6P-CSH20 HCZZ0514-6
HC-USB3.0-C34-P HC-FPC-0.5-50P-FHH20 HC-PM200-4.3H-2x20PZ HC-PM200-4.3H-2x8PS
HC-PM254-8.5H-2x20PS HC-USB2.0-L100-093P HCZZ0001-6 HCZZ0451-4