
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/15/18	BS

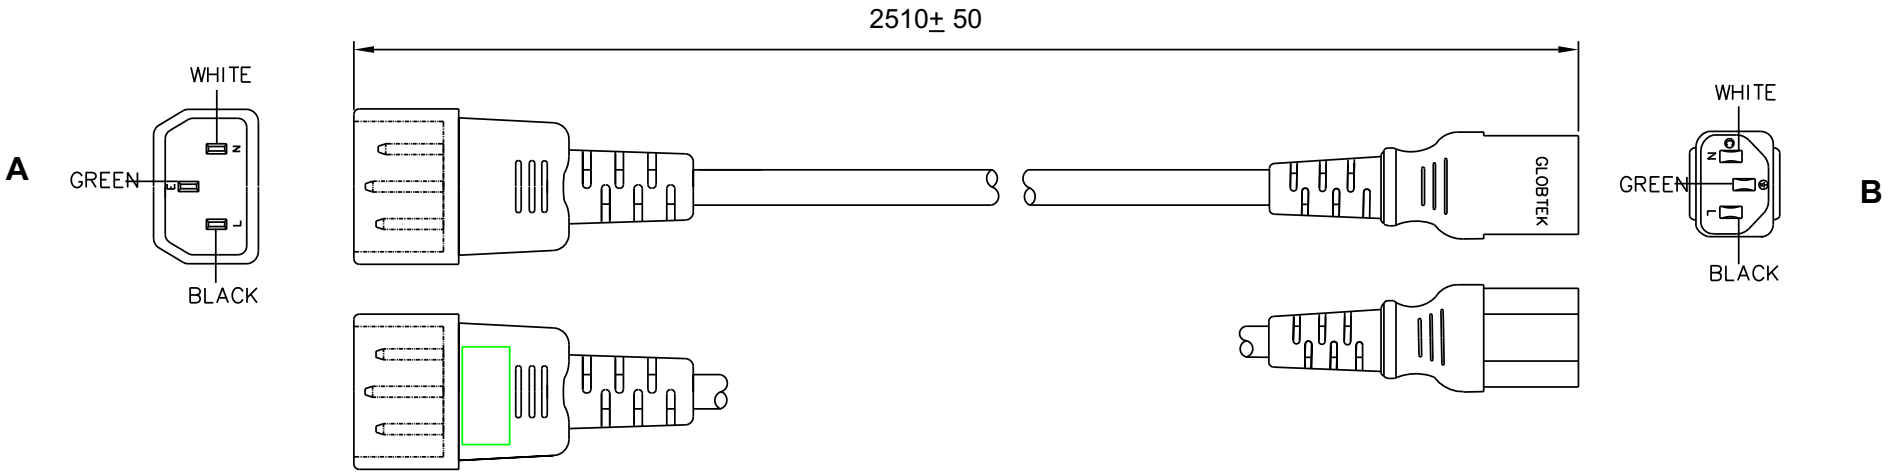

GENERAL SPECIFICATIONS:

RATING:	10A / 250V
CABLE TYPE / SIZE:	SJT, AWG 18 X 3 CONDUCTORS
TEMPERATURE RATING:	60° C
CONDUCTOR COLORS:	BLACK / WHITE / GREEN
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	2510± 50 mm
CABLE OUTER DIAMETER:	7.8 ± 0.1 mm
END 'A' PLUG:	IEC 320 / C14 MALE
END 'B' :	IEC 320 / C13 FEMALE
APPROVALS PLUG:	UL, CSA or cUL
APPROVALS CABLE:	UL, CSA or cUL
APPROVALS CONNECTOR:	UL, CSA or cUL

PACKING:

BULK PACK

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

OR

RELEASED
By N.Frost at 9:15 am, Sep 18, 2018

Complies with Restriction of Hazardous Substances RoHS

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

REV.
SHEET

TOLERANCES:
DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

INIT.BY: BS	DATE: 09/15/18	DWG TITLE: NORTH AMERICAN IEC JUMPER CORDSET	
DRAWN: NF	DATE: 09/15/18	FSCN No.: G, CC / SIZE A	REV. A
APRVD: DMR	DATE: 09/15/18	SCALE: NONE	PART NO: **7011438F2705(R)** / SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

GlobTek:

6104112M703A(R)