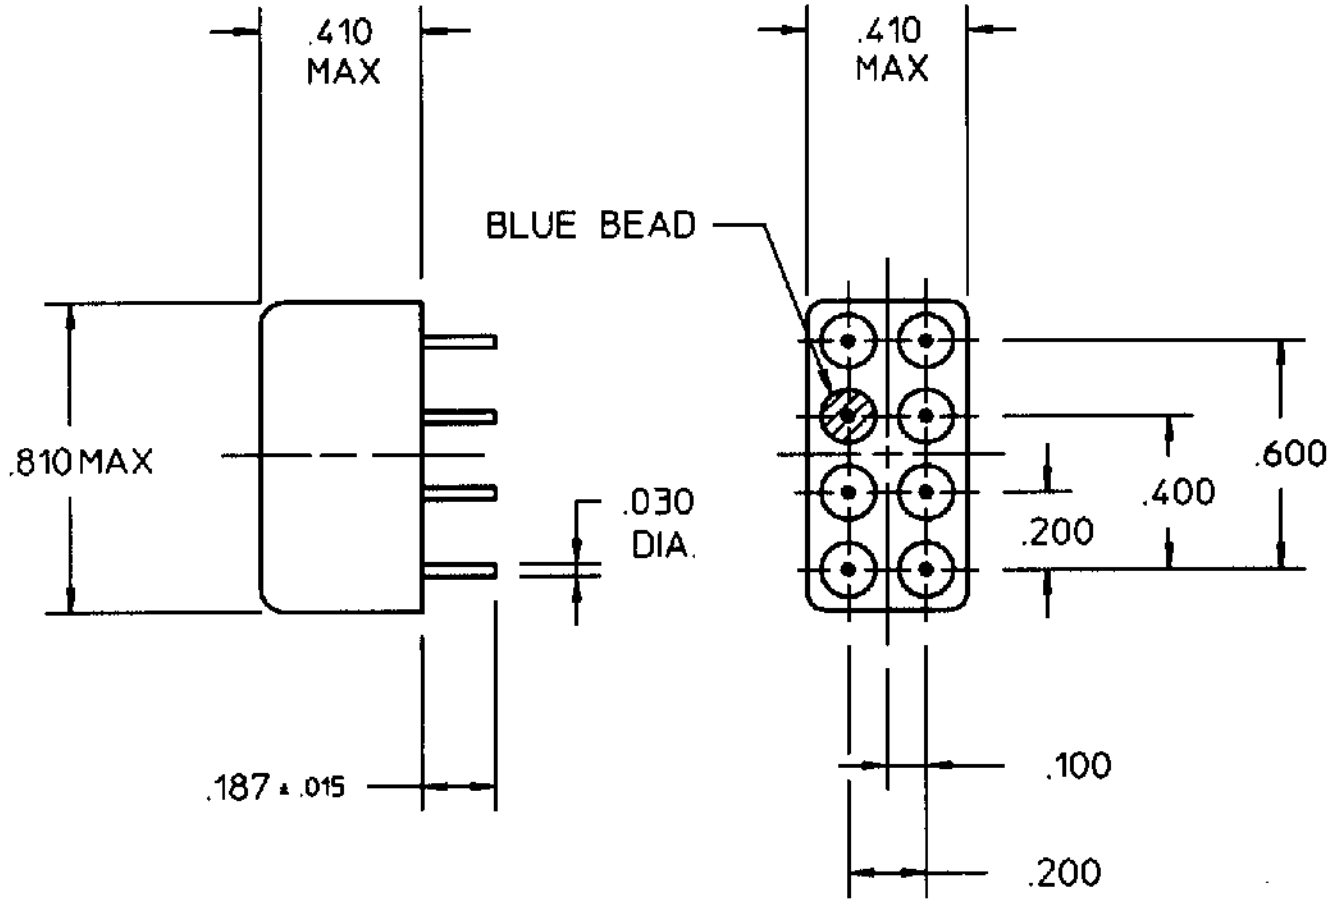


COIL: @ +25 ° C

RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	20.0 VDC
MUST OPERATE	10.6 VDC
MUST RELEASE	1.06 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

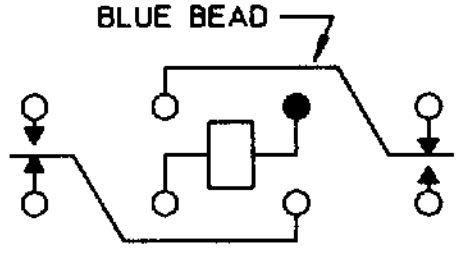

CONTACT RATING: LOW LEVEL TO 2 AMPS @ 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/7/92 | CK. 4/7/92 JmB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO.

TYPE "HF" RELAY

HF1201C00

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1743455-2 2005330-1 2380312-2 3-1393225-0 917696-1 CRGCQ2010J3K3 1-794222-0 175977-2
2-292161-3 ROX05SJ18R 650075-000 MPT100C18RF SBCHE154R7K U5254-000005-030PA 1-962915-1
1393431-1 141991-2 2310537-1 2834055-1 3430B2F51RTDF 3631B101LL 936348-1 1969656-1
CPF0402B37K4E1 SMW73R0JT 1903112-2 RH73H2A40MKTN 2377783-2 SBCHE64R7K TE50BR39J