

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		INITIAL RELEASE	2024.07.13	阿 树

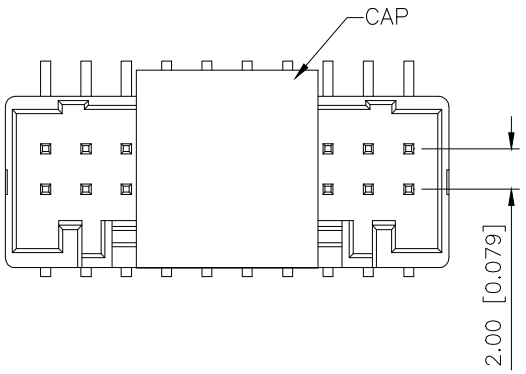




8P~10P Without Guideway
12P~40P With Guideway


■SPECIFICATIONS
- •Voltage rating:250V AC,DC
- •Current rating:3A,AC,DC
- •Withstanding Voltage:800V AC/minute
- •Insulation resistance:1000MΩ min
- •Temperature range:-45°C+95°C
- •Contact resistance:20mΩ max


PART NO.:


X2006 W V S-2x08-LP SN
① ② ③ ④ ⑤ ⑥ ⑦

① Series No
② Category:W-Wafer
③ Welding Board Angle:V-Straight 180°
④ Welding Way:S-SMT
⑤ Row No-Pin: XX-04P~20P
⑥ Material:LP-LCP UL94V-0
⑦ Plating: SN-Plated Tin

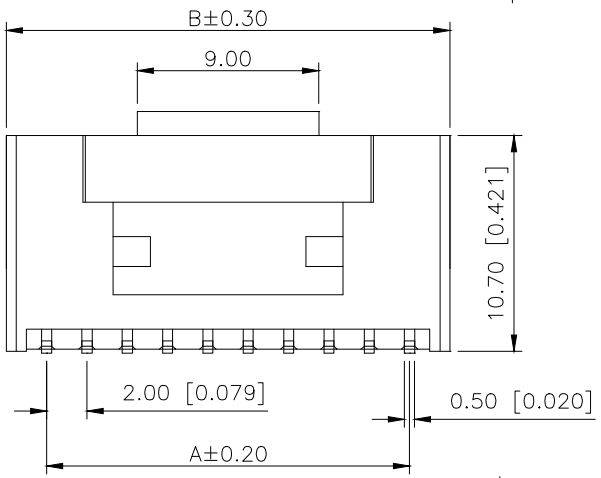

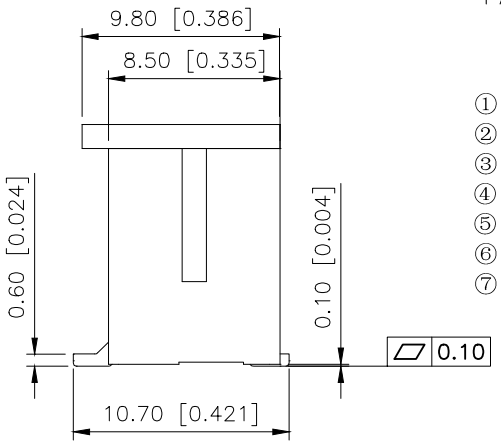

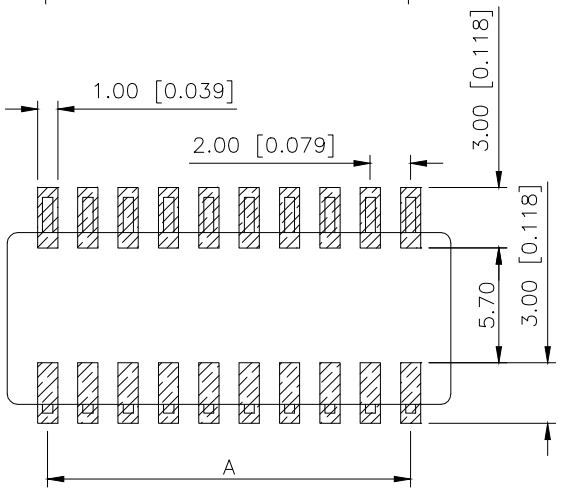

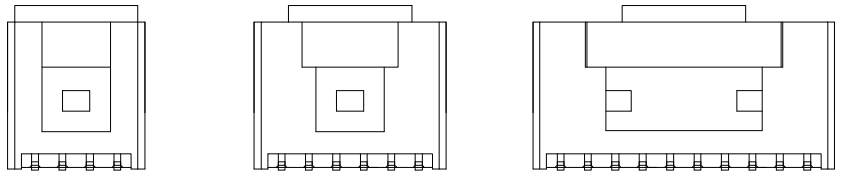

8P~10P 12P~18P 20P~40P

Poles	Dimension mn	
	A	B
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

PART NO	Material	Material (pin)	Suitable XKB Housing
X2006WVS-2x08-LPSN	LCP	Brass	X2006H

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	


XKB INDUSTRIAL PRECISION CO.,LIMITED

DESIGN	阿 树	VIEW:	MODEL TYPE: 2.0mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2006WVS-2x08-LPSN
APPROVED		SIZE: A4	DWG NO.: X-X2006WVS-2x08-LPSN


SCALE	PAGE	REVISION
N/A	1/1	A1

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		INITIAL RELEASE	2024.07.13	阿 树


2*04p




2*05p




2*06p




2*07p




2*08p




2*09p




2*10p

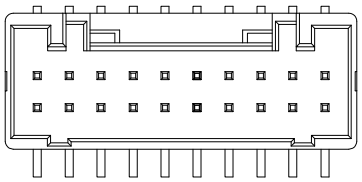


2*11p

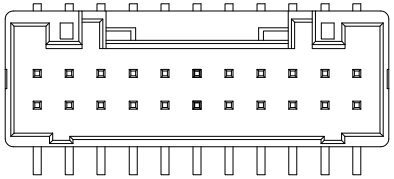


2*12p

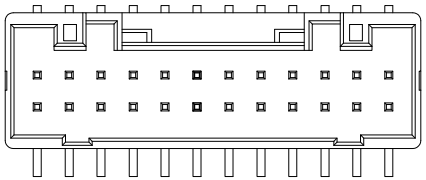


2*13p

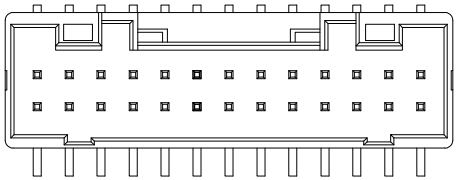


2*14p

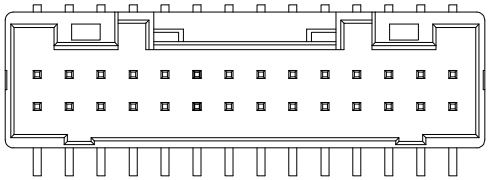


2*15p

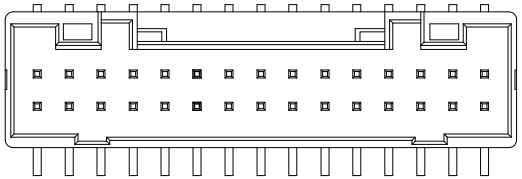


2*20p

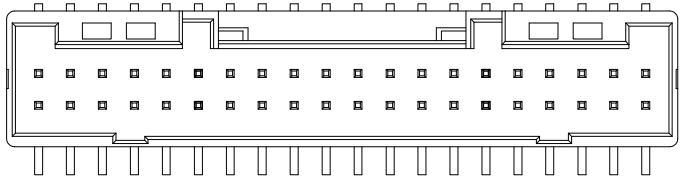


2*19p

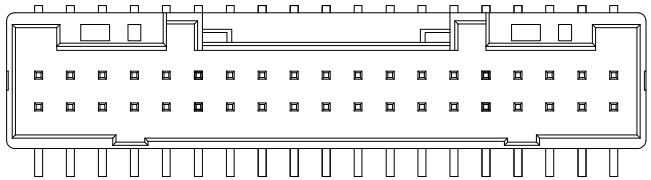


2*18p

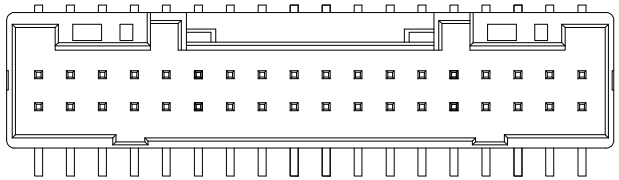

2*17p

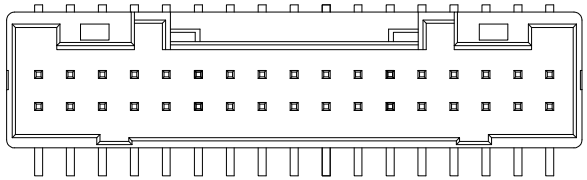

2*16p

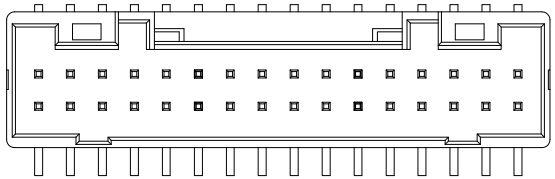

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKB INDUSTRIAL PRECISION CO.,LIMITED

DESIGN	阿 树	VIEW:	MODEL TYPE: 2.0mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2006WVS-2x08-LPSN
APPROVED		SIZE: A4	DWG NO.: X-X2006WVS-2x08-LPSN

SCALE	PAGE	REVISION
N/A	1/2	A1