CUI Devices is now Same Sky! Learn More


same sky

Additional Resources: Product Page | 3D Model | PCB Footprint

SERIES: SR7 | DESCRIPTION: SIGNAL RELAY

FEATURES

- 3~24 Vdc coil voltage
- 200 mW coil power
- contact form 1C



MODEL

	coil voltage typ (Vdc)	coil resistance (Ω±10%)	operating voltage min (Vdc)	release voltage max (Vdc)	coil power typ (mW)
SR7-3V-200-1C	3	45	2.25	0.3	200
SR7-5V-200-1C	5	125	3.75	0.5	200
SR7-9V-200-1C	9	405	6.75	0.9	200
SR7-12V-200-1C	12	720	9.0	1.2	200
SR7-24V-200-1C	24	2,880	18.0	2.4	200

Notes: 1. All specifications are measured at 23°C unless otherwise specified.

PART NUMBER KEY

SR7 - XX - 200 - 1C

Base Number

Coil Voltage (Vdc):
3V = 3
5V = 5
9V = 9
12V = 12
24V = 24

CONTACT SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
contact form	1 Form C				
contact material	AuAg overlay				
contact rating	1 A @ 120 Vac, 24 Vdc				
contact resistance	at 6 Vdc, 0.1 A			50	mΩ
max switching voltage				220 30	Vac Vdc
max switching current				3	A
max switching power				360 72	VA W
min switching load	5 Vdc, 10 mA				
life	electrical mechanical		100,000 10,000,000		operations operations

GENERAL SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
insulation resistance	at 500 Vdc	100			MΩ
dielectric strength	between open contacts for 1 minute between coil and contacts for 1 minute		750 1,500		Vac Vac
operate time				5	ms
release time				5	ms
shock resistance	endurance misoperation		1,000 100		m/s^2 m/s^2
vibration resistance	endurance: 10~55 Hz, 1.5 mm double amplitude misoperation: 10~55 Hz, 1.5 mm double amplitude				
operating temperature		-25		70	°C
humidity	at 40°C	35		95	%RH
weight			4.0		g
safety approvals	UL/cUL 508				
flammability rating	UL94V-0				
RoHS	yes				
packaging	tube: 25 pcs per tube carton size: 466 x 306 x 140 mm carton QTY: 2,000 pcs per carton				

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	for 3.5±0.5 seconds	340	350	360	°C
wave soldering	for 10±1 seconds	255	260	265	°C

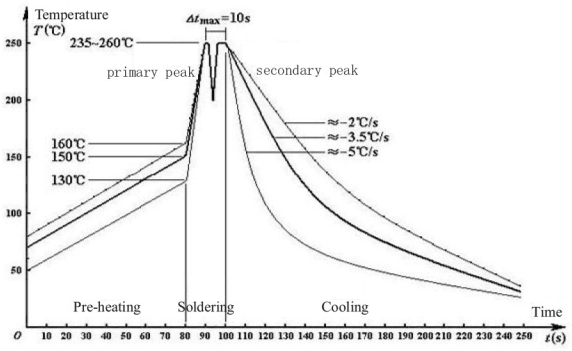



Double-wave Soldering Curve


MECHANICAL DRAWING

units: mm
tolerance: ±0.3 mm
unless otherwise noted


ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
A	housing	PBT (UL94V-0)	orange
B	terminals	copper covered steel	tin

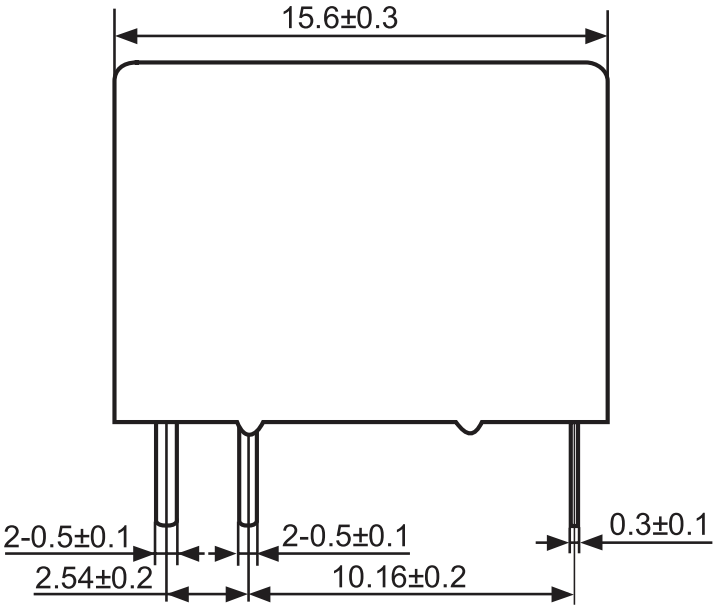

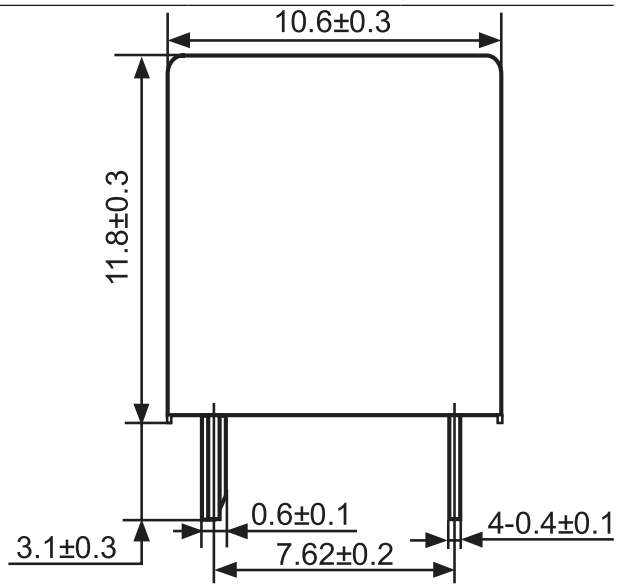

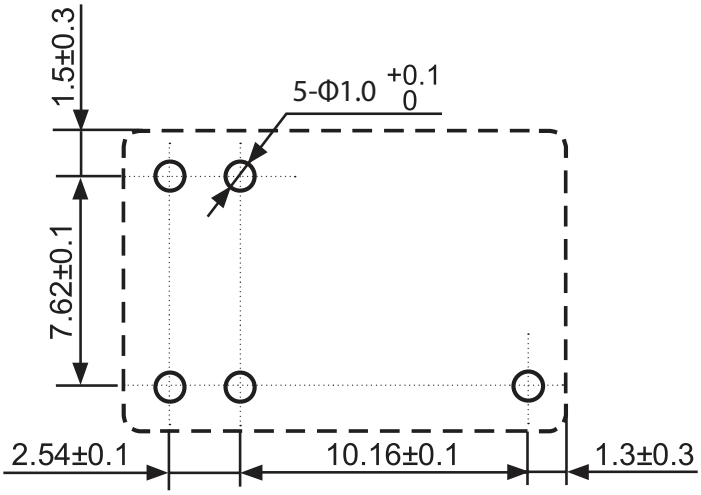


Recommended PCB Layout
Bottom View

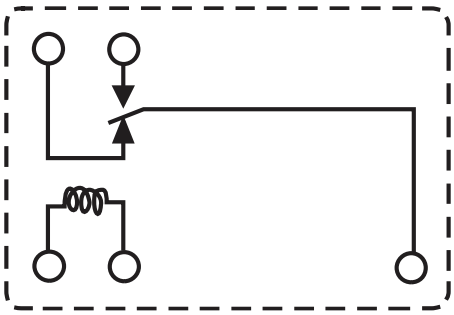


Wiring Diagram
Bottom View

CHARACTERISTIC CURVES


Time Curve

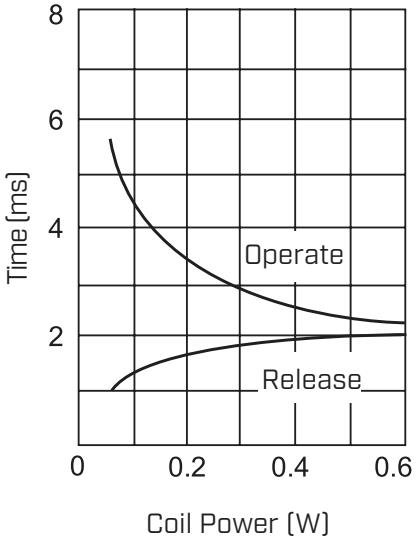


Coil Temperature Rise

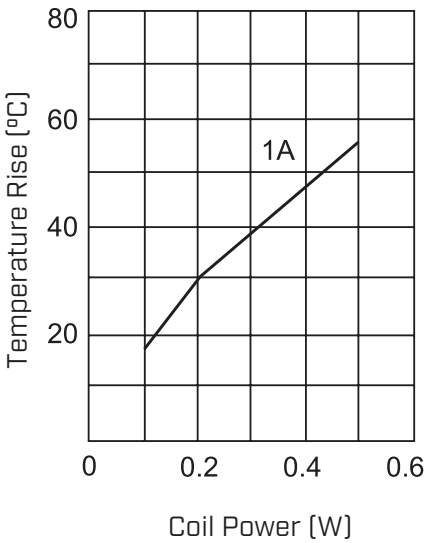


Operate Range

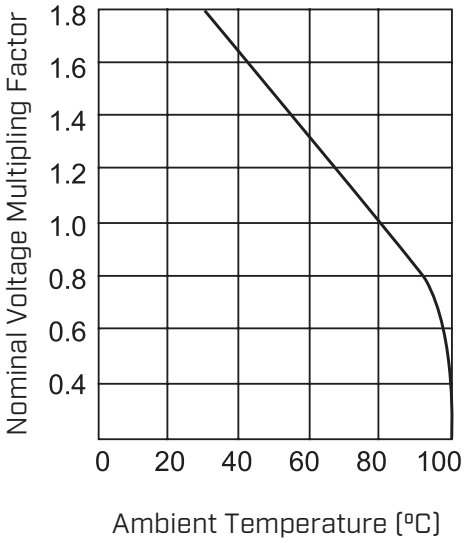

Life Curve

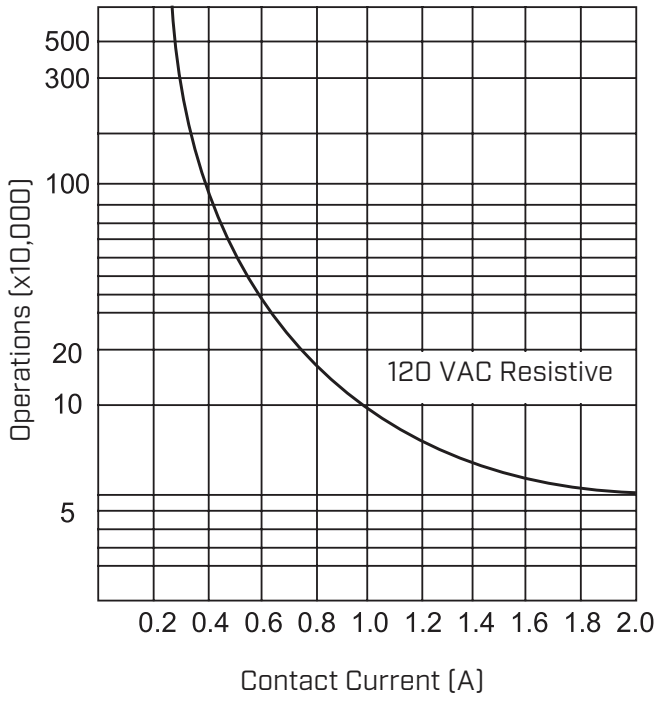

Maximum Switching Power

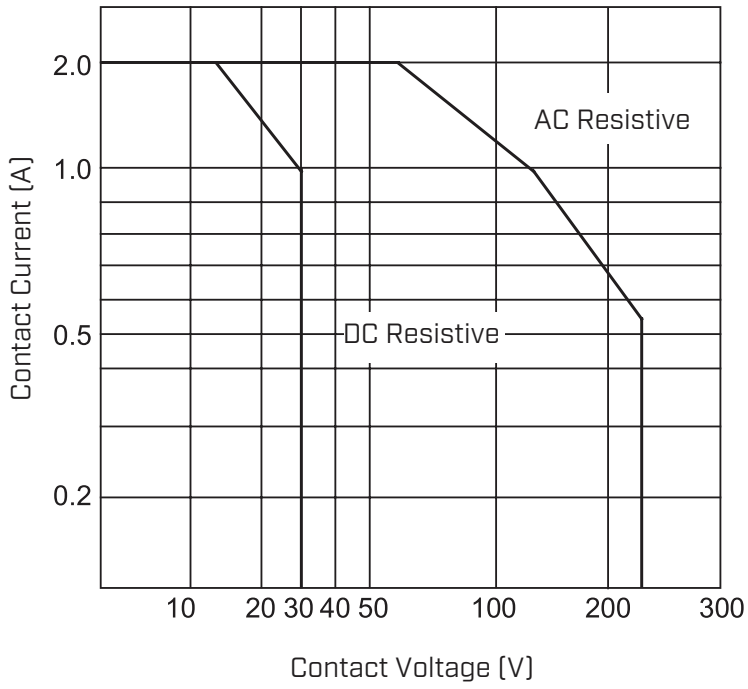

REVISION HISTORY

rev.	description	date
1.0	initial release	06/07/2022
1.01	logo, datasheet style update	10/28/2022
1.02	CUI Devices rebranded to Same Sky	09/12/2024

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Same Sky:

CBT-09427-SMT-TR PJ-067B CMA-4544PF-W CMM-2718AT-42316-TR CPM-2H TB007-508-02BE TBL004V-508-02BE-2GY CFM-2507CF-0140-313 CFM-A238BF-270-651 CPI-1375IC-80T CPT-1117-83-SMT-TR UJ32-C-H-G-L1-MSMT-TR CDM1222-12A-FW-F16-050-67 CFM-2510B-0130-275 CMI-9653S-SMT-TR HSE-B20350-NP PR4-5V-450-1A DS04-254-2-02BK-SMT PJ-058AH CMC-5042PF-AC DS01C-254-S-03BE PJ-202AH SJ-2523-SMT-TR SJ1-3535N TBP02P1-381-10BE CMP-5247TF-K PJ-047BH TBP01R1-508-14BE CFM-6015V-239-292-20 SJ-43516-SMT-TR-PI