



D款， 正向10.0前两脚,SMT-*6.20

MAPX	MODIFICATION	DATE

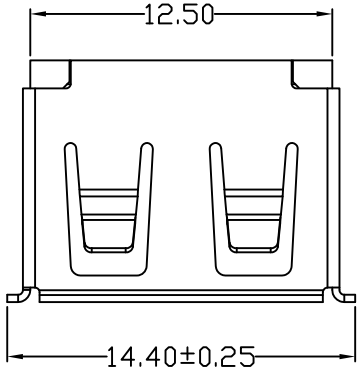

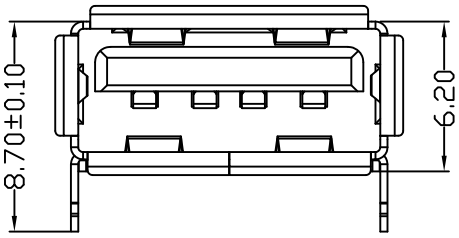


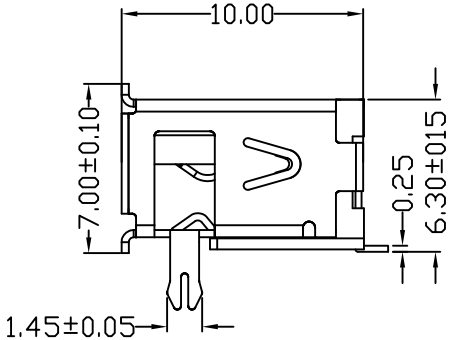

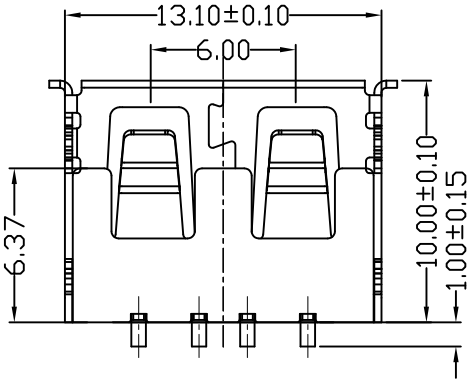

NOTES:
1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
4.Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

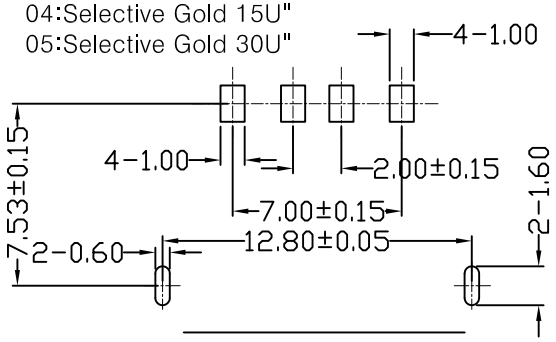

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	911-111A2026S10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0D款前两脚有边方弹铁壳LCP 黑胶6.2SMT无耳朵
日期 DATE	2012.09.24	核准 APPD		角法 VIEW	版本 VER A□

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

912-112A1011D10100 918-468K2029Y50000 918-318K2023C40005 920-F52A2021S10105
906-752B1114D10200 910-151A2021D10100 919-162A1012D10400 920-C52A2021S10105
904-232B2032S10100 904-331B2032S10200 912-312A1012D10100 917-P81A202ES60201
918-415K3028S40000 920-154A2021Y10110 920-A62A2021S10108 908-351A1011D10100
918-418K2022Y40011 904-232A2031S10100 905-761A2032S10200 912-112A2021S10100
917-B88C201AH70201 920-A62A2021S10104 906-262A1021D10200 907-312A1101Y10210
911-221A2021S10100 920-A64A2091S101A3 906-552A1012D10200 907-111A1022D10200
916-151A1022Y10200 920-C62A2021S10103