
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

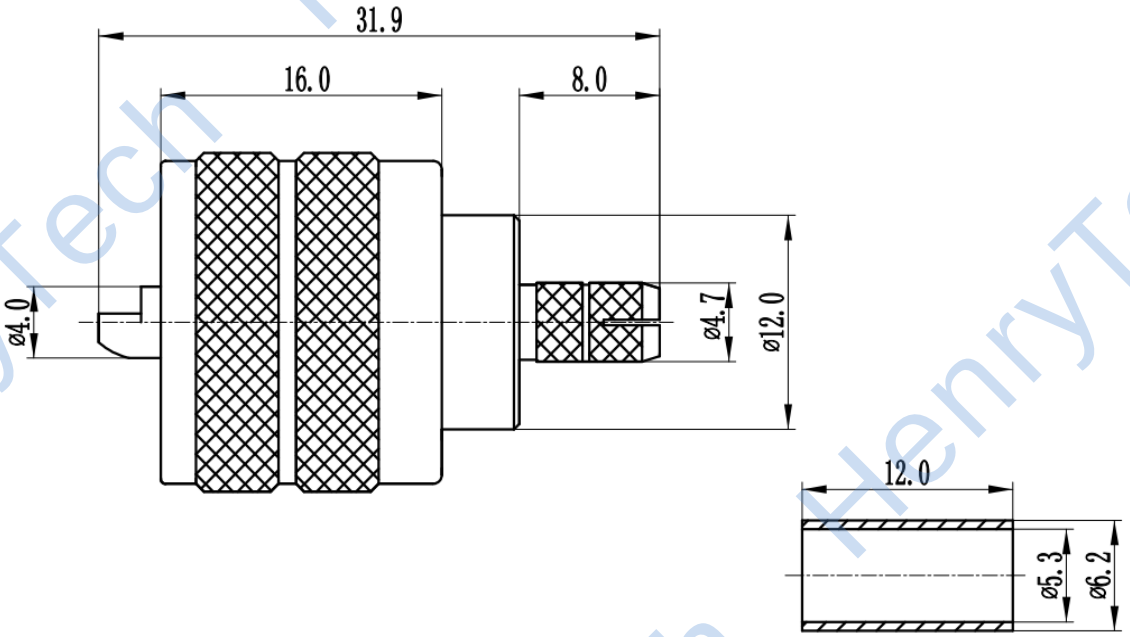

1 Electrical

1.1 Frequency:	0~300MhZ
1.2 Working voltage:	≤750V
1.3 Insulation resistance:	≥5000MΩ
1.4 Dielectric strength:	2000V
1.5 Center Contact resistance:	≤ 5MΩ
1.6 Outer Contact resistance:	≤ 5MΩ


2 Environmental&Mechanical

2.1 Temperature range	-45℃~125℃
2.2 RoHs Compliant	Yes
2.3 Durability	>500 cycles

2 Material&Finish

2.1 Inner Contact: Brass, Silver plated
2.2 Outer Contact: Brass, Nickel plated
2.3 Insulators: Teflon

Recommended Cable Stripping Dimension

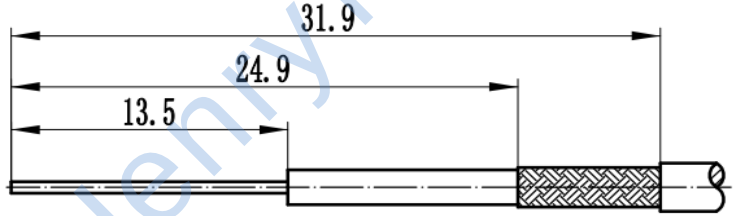

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H. wei 19/03/17	TITLE: RF Coaxial Connector UHF male Conn.For RG58 Cable		HenryTech		
ENGINEER: L. yu 19/03/17			DIMENSION IN MILLIMETERS (mm)		
APPROVED: W. yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPECIFIED: X ±0.50, .X ±0.20, .XX ±0.10, ANGLES ±1°	PART NO: HL-UHF-J5Y-E	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HL-SMAMF-2-18-15dB H2SYDC-20-62HP+ HL-N-KKC HT-HFCN-2700+ HT-LFCG-1700+ HT-SCA-4-10+ HX-SMA/SMP-JK HL-SSMA-KHD-1 H3-MABA-007871-CT1A40 H3-MABA-011085 HT-LFCG-530+ HT-LFCN-400+ HT-QCN-19+ HT-LFCN-3800+ HL-SMA-KHD4 HN-DC2016-0.5(12-4.6)M HG-SCN-2-65+ HL-MCX-KE-02 HL-SMA/SMB-KK HLCC2250G HN-LP7-0.5-1.27(9.4-2.8) HT-HFCN-3800+ HX-N-JK H3-MAPD-008109-C30040 HL-SMB-K3DY HT-BFHKI-1572+ HX-1.85-JJ H3-MABA-010551-CF1071 H3-TC1-1TG2+ HG-SCN-2-22+