
SIGN	DATE	DESCRIPTION	APPROVER
⚠			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

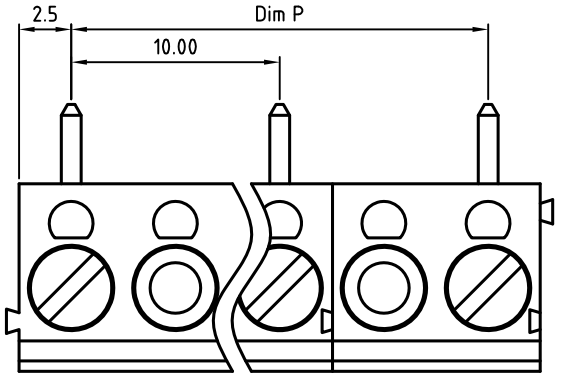

N=NUMBER OF CONTACTS
Dim.L=Nx10.0-5.0
Dim.P=(N-1)x10.0

Poles \ Dim.	Dim L	Dim P
2-4p	±0.15	±0.10
5-7p	±0.20	±0.20
8-10p	±0.30	±0.25
11-12p	±0.40	±0.30


Material


- Terminal body : Brass(CuZn) , Tin plated
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: Stainless steel
- Terminal housing: Thermoplastic (UL94V-0)

Electrical UL

- Voltage rating: 250V
- Current rating: 16A
- Wire range:
- Solid wire(AWG): 14-22
- Stranded wire(AWG): 14-22
- Torque: 2.6Lb-In
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

RoHS Compliant

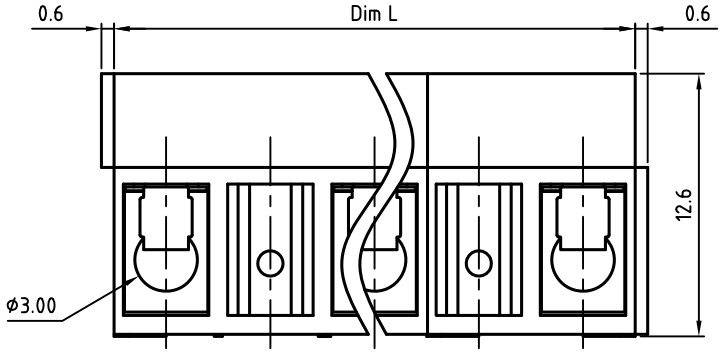

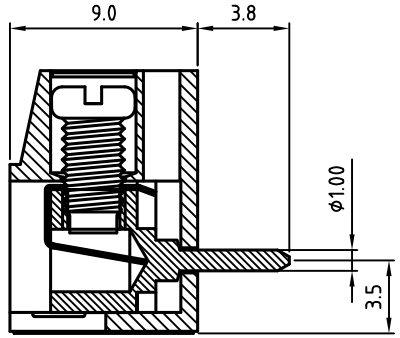


PART NUMBER:

OSTTBXX1161

POLES
02 02 CONTACTS
03 03 CONTACTS
...
12 12 CONTACTS

Color
0 Black
5 Green
6 Blue
8 Grey
C Green

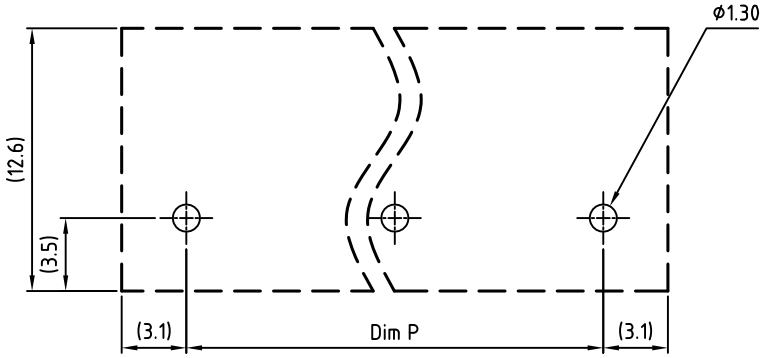

P.C.B. LAYOUT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE	OSTTB 10.0 series 2-Interlock				
PART NO.	OSTTBXX1161			DWG NO.	OSTTBXX1161.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Tason 06/13`11	Tason 06/13`11	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: B	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

On-Shore Technology:

ED555/16DS EDSTLZ950/2 EDZ950/14 M12-04P-FD-PBS2 OSTNR081200 OSTYK21103030 OSTTH030160 OSTOQ035450 OSTOQ247151 OSTT7032150 OSTTA034163 ED790/8 EDSTL950/14 USB-A1VSB60 OSTVI024152 OSTTJ0411530 OSTVI032152 OSTVL18B151 OSTYC022150 EDSTLZ990/8 EDZ1110/2 EDZ350/3 OSTTS02315A EDSTLZ950/6 EDZ1100/6 EDZ960/3 M12-05S-FA-PBS2 ED-28DT ED950/2 OSTVZ023050