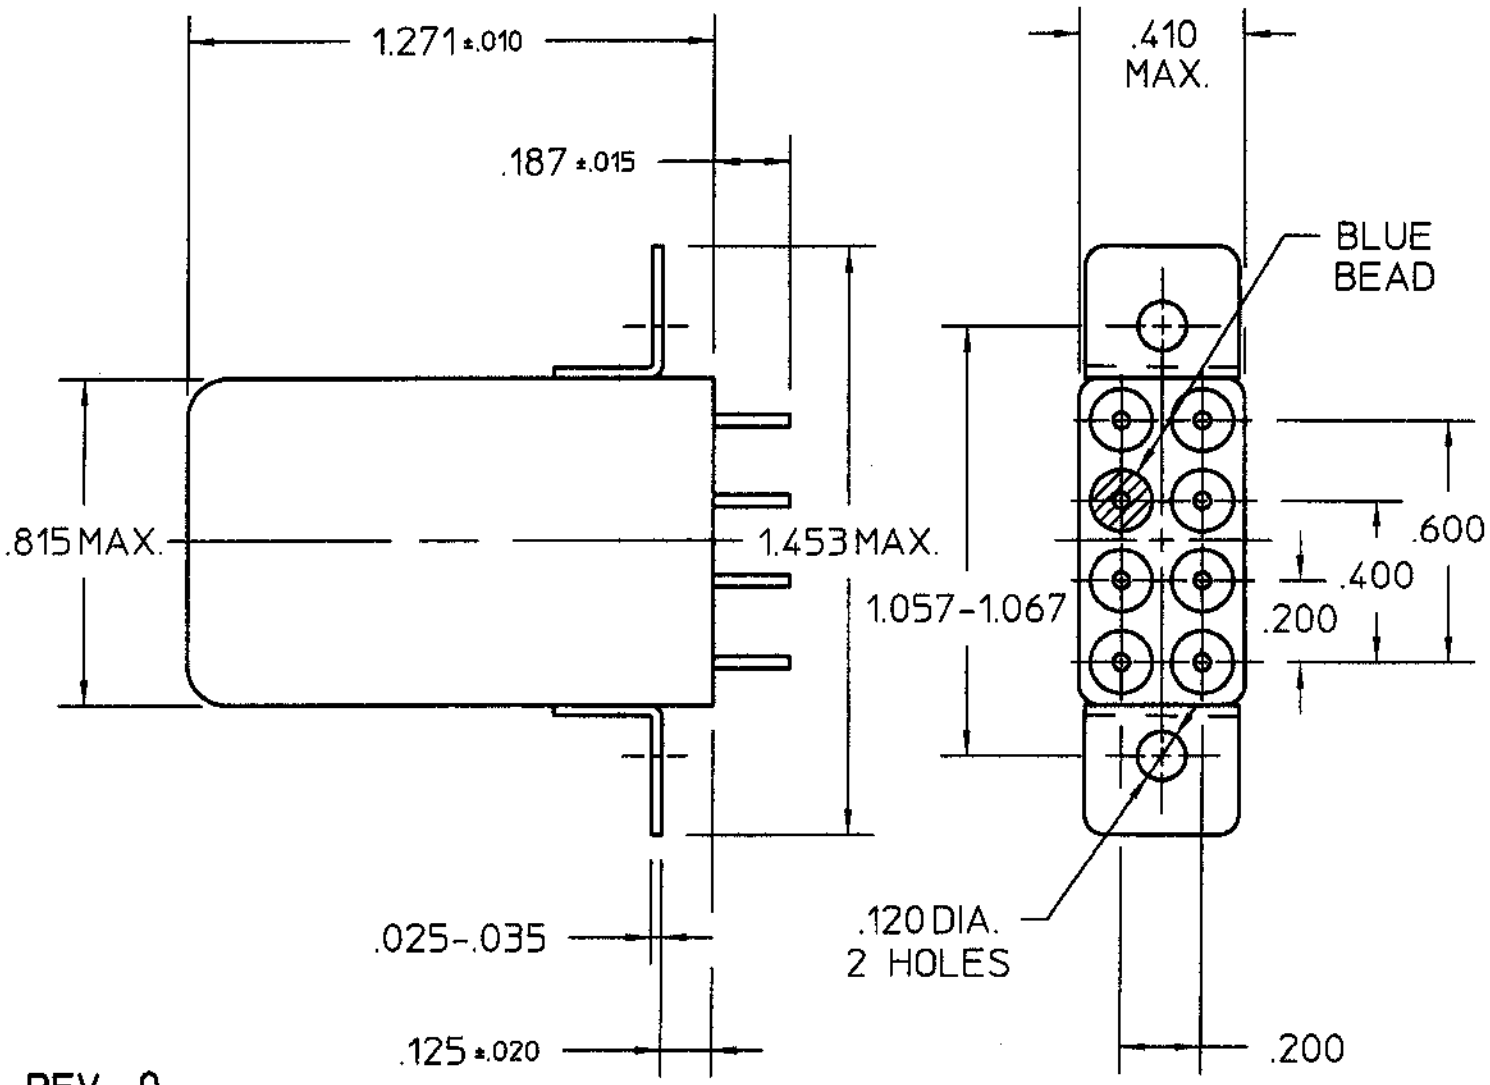


REV. 0
DCO 170410

COIL: @ 25°C

RESISTANCE	10,000 OHMS
NOMINAL VOLTAGE	4.0 mADC
MUST OPERATE	2.0 mADC
MUST RELEASE	1.0 mADC MAX, 0.2 mADC MIN

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX
RELEASE 10 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

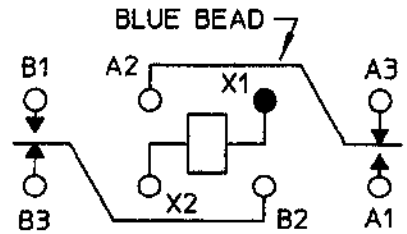

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 2/23/01 | CK. TLG 02-23-01

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-103 REV.

3SAT RELAY

3SAT1320A2

E 778 REV. B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2834055-1 CRGCQ2010J3K3 U5254-000005-030PA 1743455-2 1903112-2 1969656-1 2-292161-3
SBCHE64R7K ROX05SJ18R 1-794222-0 917696-1 1-962915-1 2380312-2 3-1393225-0 MPT100C18RF
SBCHE154R7K TE50BR39J 175977-2 SMW73R0JT CPF0402B37K4E1 1393431-1 141991-2 2005330-1
2310537-1 3430B2F51RTDF 936348-1 2377783-2 3631B101LL 650075-000 RH73H2A40MKTN