


REV.	DATE	ECR NO.	DESCRIPTION
A	01/30/04	–	UPDATE DRAWING FORMAT
B	10/05/04	–	MODIFY BODY HEX ORIENTATION
C	08/29/08	–	REVISE BARREL O.D./ REVISE FERRULE I.D. AND O.D.

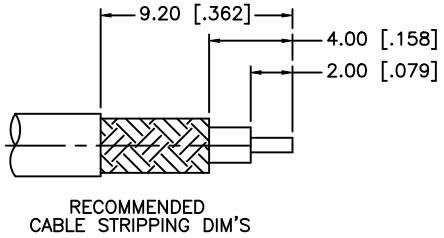


RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
MOUNTING HOLE

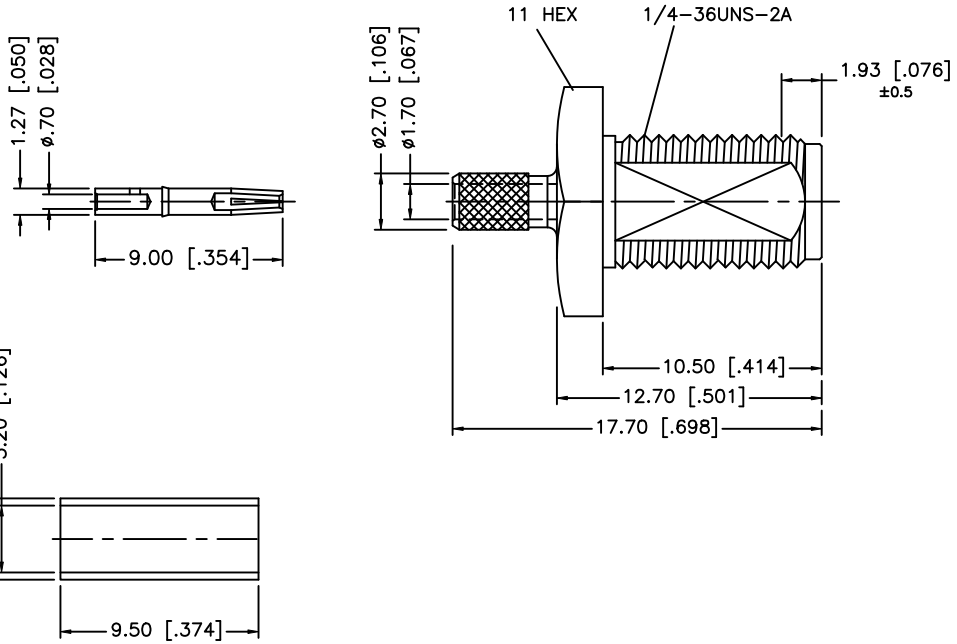

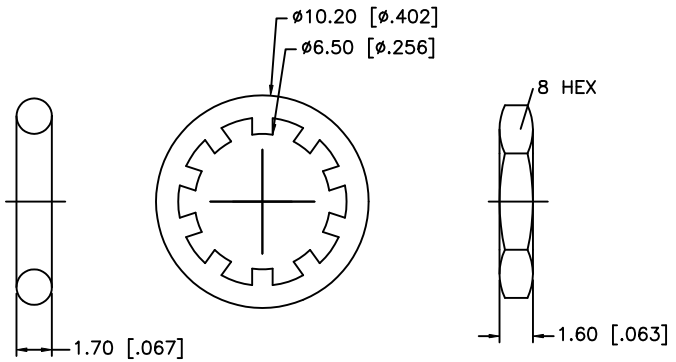

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]
2. CONTACT PIN TO SOLDER

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	FERRULE	COPPER	GOLD	1
6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	08/29/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/132/132284.DWG

Amphenol Connex

PART DESCRIPTION
SMA BULKHEAD CRIMP JACK O–RING SEAL
(FOR RG–174/U, 188A/U, 316/U CABLE)

PART NO. 132284

DWG. NO.	REV.	SIZE	SCALE
132284.DWG	C	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

86093968191755E3LF 863013A 95157-140LF 76384-316LF 86130202123355E1LF DAPO15S365TLF 54202-G0805CLF 65781-158 68001-108HLF 70430-164LF 86093968813H45V1LF CD15S13E4RV09LF RJE061661210 54202-S08-07LF 69192-408HLF D15P13A6RV12LF DEM09P032N 68000-236HLF 70234-112LF 91614-403ALF 67996-204HLF 70218-1116LF 86093488314745V1LF LD15P33E4GV00LF RJSBE5080C2 LD25S33E4GV00LF 68001-200HLF 68002116HLF 86093967896755LF DCMF37P