

MAPX	MODIFICATION	DATE

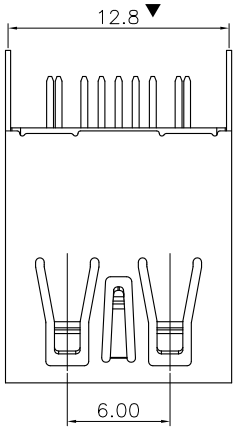

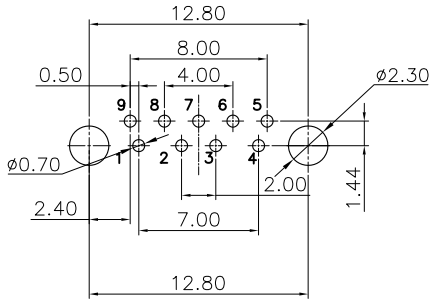



TOLERANCE: ±0.05,
RECOMMENDED PCB LAYOUT
(TOP VIEW)


NOTES:

1.MATERIAL:
- *1.1 HOUSING: HIGIH TEMPERATURATURE THERAL PLASTIC.*
- *1.2 SPRING CONTACT: COPPER ALLOY.*
- *1.3 FLAT CONTACT;COPPER ALLOY*
- *1.4 SHELL :COPPER ALLOY.*
- *1.5 COVER:HIGIH TEMPERATURATURE THERAL PLASTIC.*

2.FINISH:
- *2.1 CONTACT: (SEE P/N.),[50μ"] MIN. NICKEL UNDERPLATING OVER ALL.*
- *2.2 SHELL: [50μ"] MIN.SOLDERABLITY NICKEL UNDERPLATING OVER ALL.*



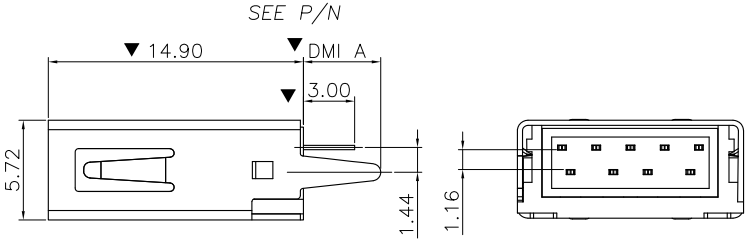

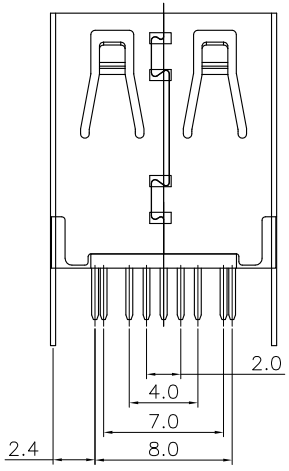

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SLGNAL NAME	V BUS	D−	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SLGNAL NAME	STDA_SSRX−	STDA_SSRX+	GND_DRAIN	STDA_SSTX−	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	916-152A2058Y20201
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF3.0 180度15.0直脚无边铜壳LCP蓝色
日期 DATE	2021-04-14	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-752B1114D10200 918-415K3028S40000 920-A62A2021S10108 907-111A1022D10200
911-221A2021S10100 904-331B2032S10200 919-162A1012D10400 918-318K2023C40005
905-761A2032S10200 908-351A1011D10100 920-A62A2021S10104 920-C52A2021S10105
920-F52A2021S10105 904-232A2031S10100 906-262A1021D10200 907-312A1101Y10210
912-112A1011D10100 918-468K2029Y50000 920-154A2021Y10110 920-C62A2021S10103
910-151A2021D10100 917-B88C201AH70201 917-P81A202ES60201 918-418K2022Y40011
912-112A2021S10100 904-232B2032S10100 906-552A1012D10200 912-312A1012D10100
916-151A1022Y10200 920-A64A2091S101A3