



PRODUCT NUMBER
10126114-XYYHLF
- LEAD FREE OPTION SEE NOTE 6,7,8
- NO. OF POS. SEE TABLE
- PIN PLATING
- BASE P/N

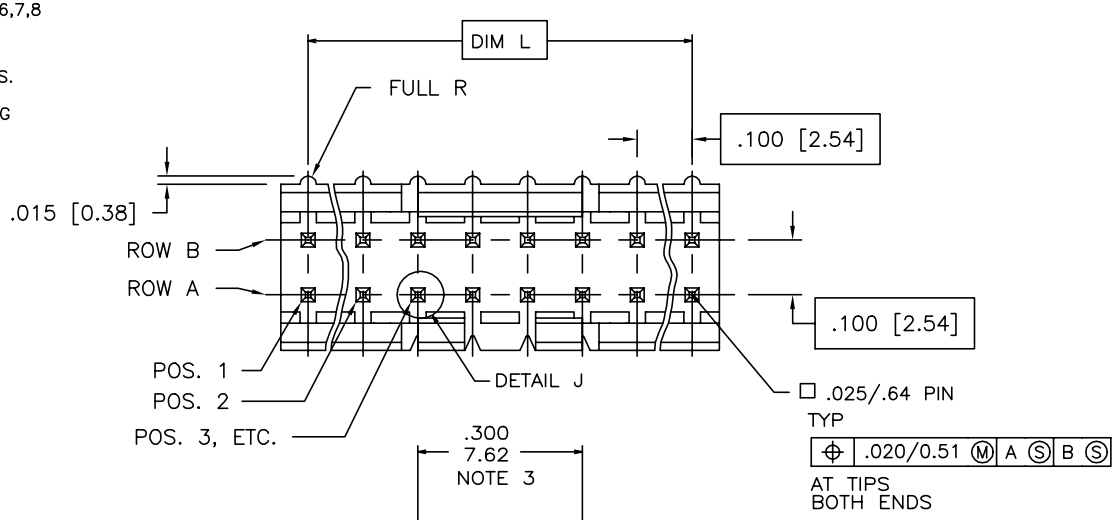



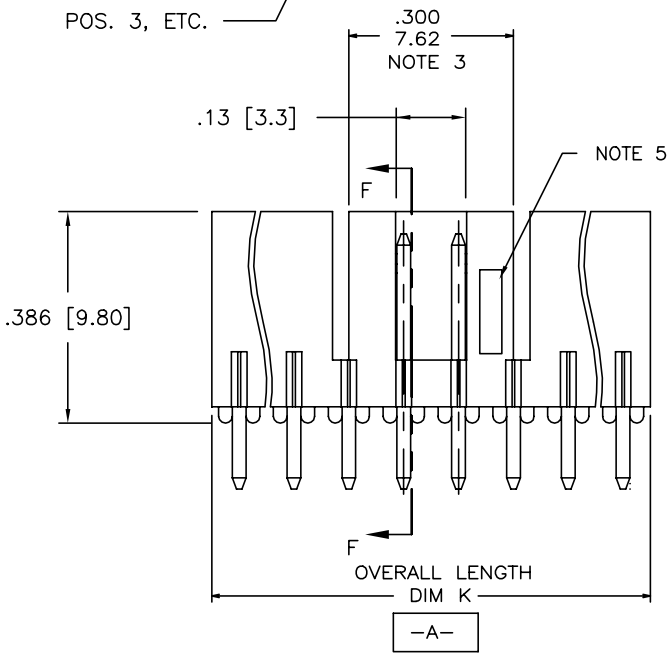

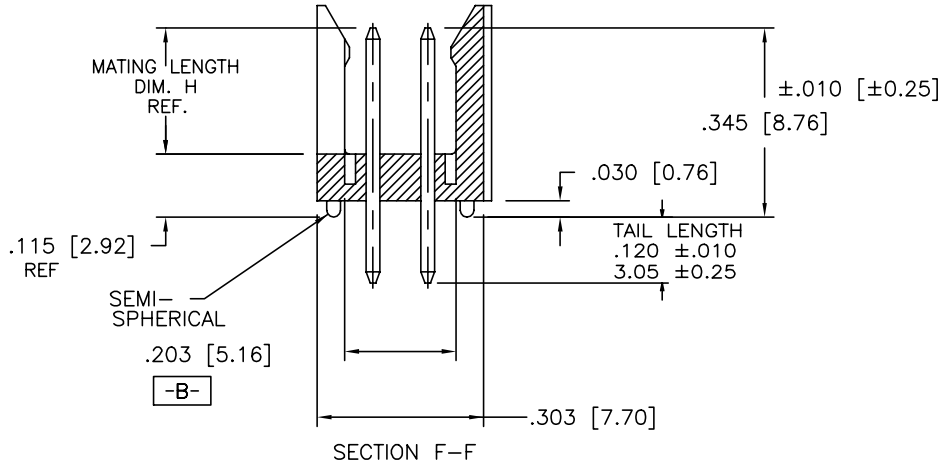

SECTION F-F

mat'l. code				surface	tolerance	projection	product family
				ISO 1302	ISO 406 ISO 1101		HEADER

ltr	ecn	nodr	date
A	NEW	ZK	06/14/13

tolerances unless otherwise specified

angles	linear	
0°±2°	.XX±.01/.X±0.3 .XXX±.005/.XX±0.13 .XXXX±.0020/.XXX±0.05	INCH/MM

scale 3:1

dr	ZK HU	06/14/13
engr	ZK HU	06/14/13
chr	RICK BIAN	06/14/13
appd	RICK BIAN	06/14/13

title: FRICTION LATCH HEADER DOUBLE ROW VERTICAL

dwg no 10126114 | sheet 1 of 2 | size A3

type Product Customer Drawing

sheet index	revision	A
	sheet	1
		2

Copyright FCI

FCIconnect.com

form A3

PRODUCT NUMBER	NO.OF POS.	MATING LENGTH DIM H	OVERALL LENGTH DIM K	DIM L
10126114–X06	2 X 3	0.230/5.84	0.300/7.62	0.200/5.08
–X08	2 X 4	0.230/5.84	0.400/10.16	0.300/7.62
–X10	2 X 5	0.230/5.84	0.500/12.70	0.400/10.16
–X12	2 X 6	0.230/5.84	0.600/15.24	0.500/12.70
–X14	2 X 7	0.230/5.84	0.700/17.78	0.600/15.24
–X16	2 X 8	0.230/5.84	0.800/20.32	0.700/17.78
–X18	2 X 9	0.230/5.84	0.900/22.86	0.800/20.32
–X20	2 X 10	0.230/5.84	1.000/25.40	0.900/22.86
–X22	2 X 11	0.230/5.84	1.100/27.94	1.000/25.40
–X24	2 X 12	0.230/5.84	1.200/30.48	1.100/27.94
–X26	2 X 13	0.230/5.84	1.300/33.02	1.200/30.48
–X28	2 X 14	0.230/5.84	1.400/35.56	1.300/33.02
10126114–X30	2 X 15	0.230/5.84	1.500/38.10	1.400/35.56

PIN PLATING CODES	
–1YY	30u"/.76u Au MIN. ON 50u"/1.27u Ni
–2YY	15u/.38u Au MIN. ON 50u"/1.27u Ni

NOTES:

1. MOLDING MAT'L: GLASS REINFORCED PCT, COLOR: BLACK
   FLAME RETARDANT PER UL 94 V–0
   MAXIMUM OPERATING TEMPERATURE: 130° C
   OR
   MINERAL FILLED LCP, COLOR BLACK
   FLAME RETARDANT PER UL 94 V–0

2. PIN MATERIAL: 3/4 HD PHOS. BRZ.

3. NO SLOTS ON 2 X 5 POSITION OR SMALLER PRODUCT. THE CENTER KEY SLOT WILL BE ON ALL HEADERS REGARDLESS OF SIZE.

4. TWO NON–CRITICAL SIDES OF PIN TIP NOT PLATED, BOTH ENDS.

5. COMPANY LOGO MAY APPEAR IN THIS AREA.

6. ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.

7. PART NUMBERS WITH "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA–RED OR VAPOR PHASE SOLDER PROCESS.

   PART NUMBERS WITHOUT "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR WAVE SOLDER PROCESS.

8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS–22–008.

mat'l. code

surface ISO 1302

tolerance ISO 406 ISO 1101

projection

product family: HEADER

ltr	ecn	nodr	date
A			

tolerances unless otherwise specified:

angles: 0°±2°

linear: .XX±.01/.X±0.3; .XXX±.005/.XX±0.13; .XXXX±.0020/.XXX±0.05

INCH/MM

scale 3:1

dr	ZK HU	06/14/13
engr	ZK HU	06/14/13
chr	RICK BIAN	06/14/13
appd	RICK BIAN	06/14/13

title: FRICTION LATCH HEADER DOUBLE ROW VERTICAL

dwg no 10126114 sheet 2 of 2 size A3

type Product Customer Drawing

sheet index | revision sheet

FCIconnect.com
Copyright FCI

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68001-200HLF 95157-140LF 54202-G0805CLF 70218-1116LF RJE061661210 86093968813H45V1LF 65781-158 86093968191755E3LF 86130202123355E1LF 863013A D15P13A6RV12LF DAPO15S365TLF LD15P33E4GV00LF 54202-S08-07LF 68000-236HLF 68001-108HLF 69192-408HLF 70234-112LF CD15S13E4RV09LF RJSBE5080C2 DEM09P032N LD25S33E4GV00LF 86093488314745V1LF DCMF37P 67996-204HLF 68002116HLF 70430-164LF 76384-316LF 86093967896755LF 91614-403ALF